

**Members**

Mark McIntire, *Chair*  
 Bret Maddox, S.E., *Vice Chair*  
 Katie Chase  
 Edward Echtle  
 Ken House  
 Jonah Jensen  
 Megan Luce  
 Daniel Rahe  
 Duke York

Ross Buffington, *Wedge Neighborhood Ex-Officio*  
 Marshall McClintock, *North Slope Ex-Officio*

**Staff**

Reuben McKnight, *Historic Preservation Officer*  
 Tonie Cook, *Landmarks Coordinator*



# Agenda

## Landmarks Preservation Commission Community & Economic Development Department

Date: October 10, 2012  
 Location: 747 Market , Tacoma Municipal Bldg, Room 248  
 Time: 5:00 p.m.

LPC77/12

*Please note assigned times are approximate. The Chair reserves the right to alter the order of the agenda.*

### 1. ROLL CALL

### 2. CONSENT AGENDA

- A. Excusal of Absences
- B. Administrative reviews
  - i. 911 N L Street (window)

### 3. DESIGN REVIEW

- A. **Old Business**
  - i. Elks-McMenamins (565 Broadway – Old City Hall Historic District) Staff  
*Update on window and skylight*
  - ii. 901 N K Street (North Slope Historic District) Staff  
*Follow up on window replacement*

### 4. CHAIR COMMENTS

### 5. BOARD BRIEFING

- A. Minimum Buildings and Structures Code Lisa Wojtanowicz  
*Discussion of code enforcement and proposed regulatory code changes*
- B. 1239 E 54<sup>th</sup> Street – J.M. Hendrickson Homestead Staff  
*Follow up on ARC site visit regarding proposed short plat*

### 6. BOARD BUSINESS/PRESERVATION PLANNING

- A. Commission reappointments/vacancies for 2013

Reuben McKnight  
 Historic Preservation Officer

*Next Regular Meeting: October 24, 2012, 747 Market Street, Tacoma Municipal Bldg., Rm. 248 5:00 p.m.*

*This agenda is for public notice purposes only. Complete applications are included in the Landmarks Preservation Commission records available to the public BY APPOINTMENT at 747 Market Street, Room 1036, or online at <http://tacomaculture.org/historic/resources.asp>. All meetings of the Landmarks Preservation Commission are open to the public. Oral and/or written comments are welcome.*



The City of Tacoma does not discriminate on the basis of disability in any of its programs, activities, or services. To request this information in an alternative format or to request a reasonable accommodation, please call the Community and Economic Development Department at 591-5200 (voice). TTY or speech to speech users please dial 711 to connect to Washington Relay Services, or email [landmarks@cityoftacoma.org](mailto:landmarks@cityoftacoma.org).



**STAFF REPORT**

**LPC 78/12**  
October 10, 2012

**DESIGN REVIEW**

**AGENDA ITEM 3Ai: Elks-McMenamins (565 Broadway – Old City Hall Historic District)**

*Reuben McKnight, Historic Preservation Officer*

**BACKGROUND**

This is an update and follow up on the Elks-McMenamins project revisions.

On October 5, 2010, the Landmarks Preservation Commission issued an approval for exterior renovations related to the proposed Elks-McMenamins project, including repair, refabrication or replacement of certain elements, canopies, ADA access, signs and related elements. A related approval by the Commission allowed for the demolition of the annex, which is a 1937 addition to the main temple that housed, among other things, a handball court. This approval was issued separately, because the two structures sit on different parcels that were under different ownership. The annex was to be removed as a part of the Elks On Broadway mixed use development, which would have bordered the Elks Temple and included structured parking and hotel rooms.

The Elks-McMenamins project is currently in the permitting process. Since the 2010 approval by the Landmarks Preservation Commission, several things have changed. The Elks On Broadway project is no longer proposed, and the 1937 annex will not be removed. Instead, hotel rooms will be included within the Elks Temple, necessitating several interior changes to the structure, which will affect the exterior appearance.

On September 26, staff sought guidance for several of these alterations, as follows:

- Addition of a shed-roofed skylight in the center of the roof to allow for daylight into the upper floors of the temple
- Addition of windows to the north wall of the annex

The Commission provided the following guidance to staff:

- The skylight should be lowered to parapet level or be redesigned to be bilaterally symmetrical, to complement the symmetry of the building.
- There were no concerns with the proposed windows, except for a single window on the 4<sup>th</sup> floor of the annex, which appeared to be out of alignment with the other windows in its column.

The Commission indicated that if these items were addressed, the changes would be suitable for administrative review.

**UPDATE**

Staff has discussed the changes with the design team, and updated drawings are included in the Commission packet.

Skylight: the overall height of the skylight has been lowered substantially, and is now symmetrical with a ridged roof, per the Commission's feedback.

Window: the window that is out of "alignment" is an existing window, as are the other fourth floor windows. The windows on the lower floors are in a different alignment due to a code required egress stair at the end of the corridor onto which the hotel rooms open. The location of the stair well was

dictated by the 1) the need to access the Commerce level lobby, 2) a desire to avoid interrupting the window patterning on the front elevation of the annex. It is possible to relocate the existing window to be in alignment with the new windows, if it is an issue.

## RECOMMENDATION

This information is provided as an update as well as to provide a clarification on some of the issues discussed on 9/26/12. If there are no additional concerns, no action is required.

### AGENDA ITEM 3Aii: 901 North K Street (North Slope Historic Special Review District)

*Kevin Lukinbill, Property Owner*

## BACKGROUND

This is a retroactive application for:

- 1) Removal of one rear non historic slider-type window and replace with one double hung wood clad Marvin window in the existing opening; the removal and replacement of one non historic window and replace it in a traditional style is appropriate and exempt from review.
- 2) Removal of one rear side and one rear double hung windows and replace with two double hung wood clad Marvin windows in the existing openings.
- 3) Removal of one second level rear nonhistoric door and replace with metal 9-lite exterior Jeldwen door. The existing door opening was covered until a second story deck and stairway was installed, after design review and approval by the Commission in 2008.

At the Commission discussion on 9/26/12, it was determined that the original sashes may still be on site. The Commission deferred the decision on the application and instructed staff to visit the property and assess the condition of the original sashes.

## UPDATE

Following the meeting, the property owner informed staff that the window sashes were no longer on his property (apparently were stolen from beside the garage where they had been left since removal).

## STANDARDS

### North Slope Special Review District Guidelines

#6, Exterior Materials. Goals: Use compatible materials that respect the visual appearance of the surrounding buildings. Buildings in the North Slope Neighborhood were sided with shingles, or with lapped, horizontal wood siding of various widths. Subsequently, a few compatible brick or stucco-covered structures were constructed, although many later uses of these two materials do not fit the character of the neighborhood. Additions to existing buildings should be sided with a material to match, or be compatible with, the original or existing materials. New structures should utilize exterior materials similar to those typically found in the neighborhood.

#7. Rhythm of Openings. Goals: Respect the patterns and orientations of door and window openings as represented in the neighboring buildings. Typically, older buildings have doors and transoms that matched the head height of the adjacent windows. Doors also tend to be paneled or contain glazed openings. Windows are vertically oriented. Large horizontal expanses of glass are created by ganging two or more windows into a series. Most windows are either single or double hung, with a few casement windows being incorporated into the designs. Many of the buildings had the upper sash articulated into smaller panels, either with muntin bars, leaded glazing, or arches. Most older windows were also surrounded with substantial trim pieces or window head trim.

**ANALYSIS**

1. The home on the property is historically significant as a contributing structure in the North Slope Historic District; it was constructed in 1892. As part of the North Slope it is listed on the Tacoma, Washington and National Registers of Historic Places.
2. The Landmarks Preservation Commission has jurisdiction to review and approve, or not approve, changes to this building including new construction per TMC 13.05.047, prior to those changes being made, by virtue of its status as a City Landmark.
3. The removal and replacement of one slider style window with a traditional style window and the one non historic door replacement are exempt per the Administrative Review Bylaws.
4. The removal and replacement of two original double hung windows was completed without review by the Landmarks Preservation Commission as required by TMC 13.05.047. Since the installation, the owner has applied for the building permit and the current design review.
5. A retroactive proposal to remove existing wood windows and install wood clad windows does not appear to meet North Slope Special Review District Guideline #6 Exterior Materials, specifically, *“Use compatible materials that respect the visual appearance of the surrounding buildings...”*
6. The installation of a traditional style of double hung windows in the existing original openings does appear to meet NSHD Guideline #7. Rhythm of Openings, specifically, *“Respect the patterns and orientations of door and window openings as represented in the neighboring buildings...windows are vertically oriented...most windows are either single or double hung...”*
7. The two windows are located on the side rear and rear elevations which may appear to reduce the visibility of the windows from the right of way, however the home is located on a corner, therefore, the side and rear elevations are more visible to the street.
8. The Commission has approved fiberglass wood clad windows on rear elevations.
9. At the Commission discussion on 9/26/12, it was determined that the original sashes may still be on site. The Commission deferred the decision on the application and instructed staff to visit the property and assess the condition of the original sashes.
10. However, following the meeting, the property owner informed staff that the window sashes were no longer on his property (apparently were stolen from beside the garage where they had been left since removal).

**RECOMMENDATION**

Staff recommends approval of the analysis as findings and recommends approval of the retroactive application by the Commission.

**BOARD BRIEFING**

**AGENDA ITEM 5A: Minimum Buildings and Structures Code**

*Lisa Wojtanowicz, Community Based Services/Code Enforcement*

**BACKGROUND**

Ms. Wojtanowicz will provide an overview of the efforts to update TMC 2.02, Minimum Buildings and Structures Code, specifically highlighting efforts to improve the code’s compatibility with historic structures and the Landmarks Preservation Commission’s design review process. This includes changes to definitions, procedural requirements, and code-mandated repair requirements for substandard structures that are historically designated properties.

A working draft of the code is included in the Board Packet.

**AGENDA ITEM 5B: 1239 E 54<sup>th</sup> Street (J.M. Hendrickson Homestead)**

Staff

**BACKGROUND**

This is a follow up discussion from the Architectural Review Committee's site visit on 10/3/12 to the property, regarding the proposal to short plat a portion of the agricultural space.

Key questions for discussion include:

1. Could some portion of the existing property be removed and developed, while retaining the historic character and integrity of the original farmstead?
2. If so, of the proposals shown by the applicant, is there a preferred proposal?
3. Are there other mitigation options that the Commission would request (for example, monuments marking the original boundaries of the homestead)?

The desired outcome of this discussion is guidance and direction for the property owner regarding the feasibility of proceeding with the efforts to short plat the property.

**BOARD BUSINESS**

**AGENDA ITEM 6A: Commission Reappointments/Vacancies for 2013**

The following are the expiring terms/vacancies on the Commission. These positions will be openly recruited per City Council policy, with a cutoff deadline of November 9, 2012.

Commissioner	Expiration date	Position
Mark McIntire	12/31/12	Architect #3
Bret Maddox	12/31/12	At Large #3
Ken House	12/31/12	Professional #4
Katie Chase	12/12/12	Professional #3
Edward Echtle	12/31/12	At Large #2
Vacant	12/31/14	Architect #1

**PENDING AGENDA ITEMS**

Special Tax Valuation

1. 731 Commerce – Davies Building
2. 1111 N 4<sup>th</sup> St
3. One North Broadway – Edgecliff Apartments
4. 1415 N 5<sup>th</sup> Street

Design Review

915 N M Street: partial window replacement

Nominations/Other

Kellogg-Sicker Building and Pochert Building (Brown's Star Grill properties)

933 Market Street: rescission of designation request


Historic Pavements

\*\*\*


October 4, 2012

#### Elks-McMenamin's Design Revisions

Please see the following attached pages for revisions to the skylight design, as well as additional information regarding the window locations on the northern elevation.

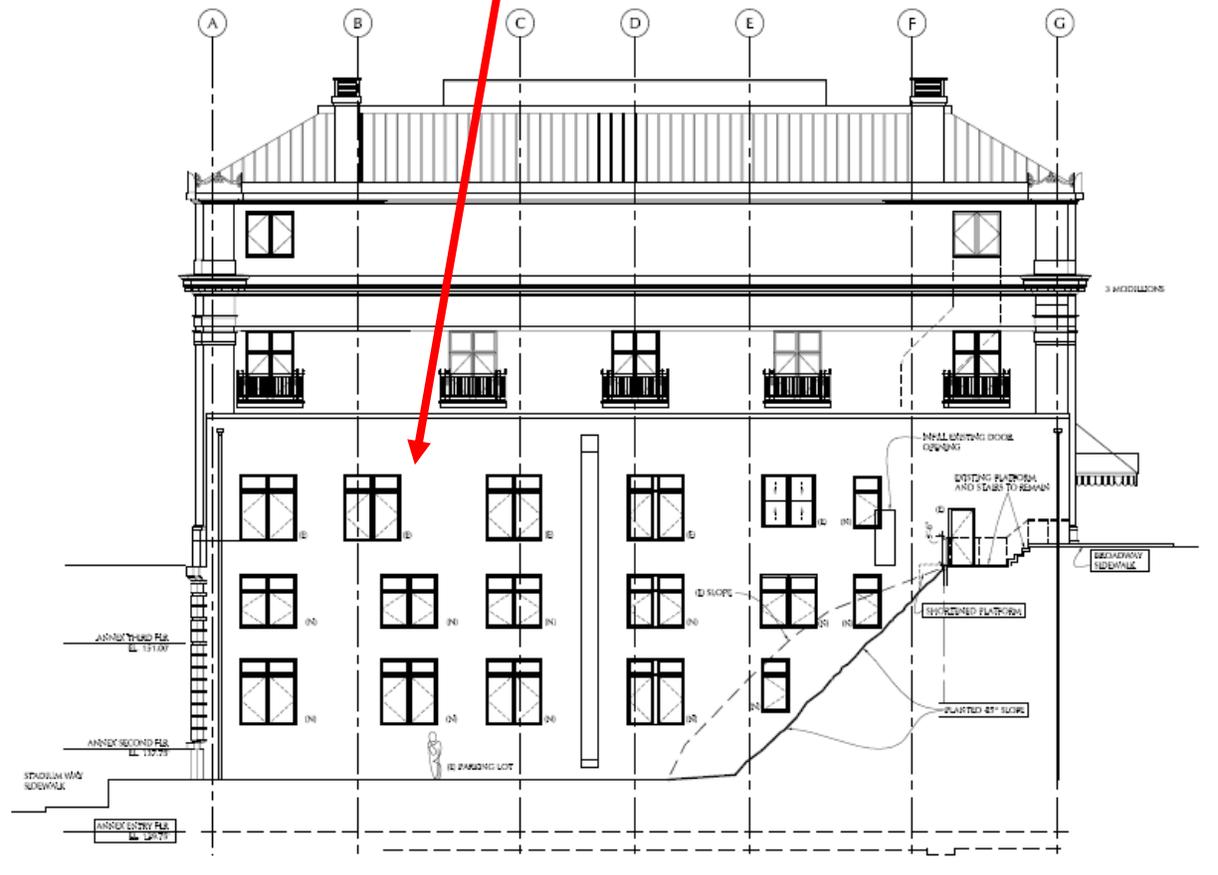


Per the Commission's request, the skylight has been redesigned as a symmetrical ridged structure, with a lower height.

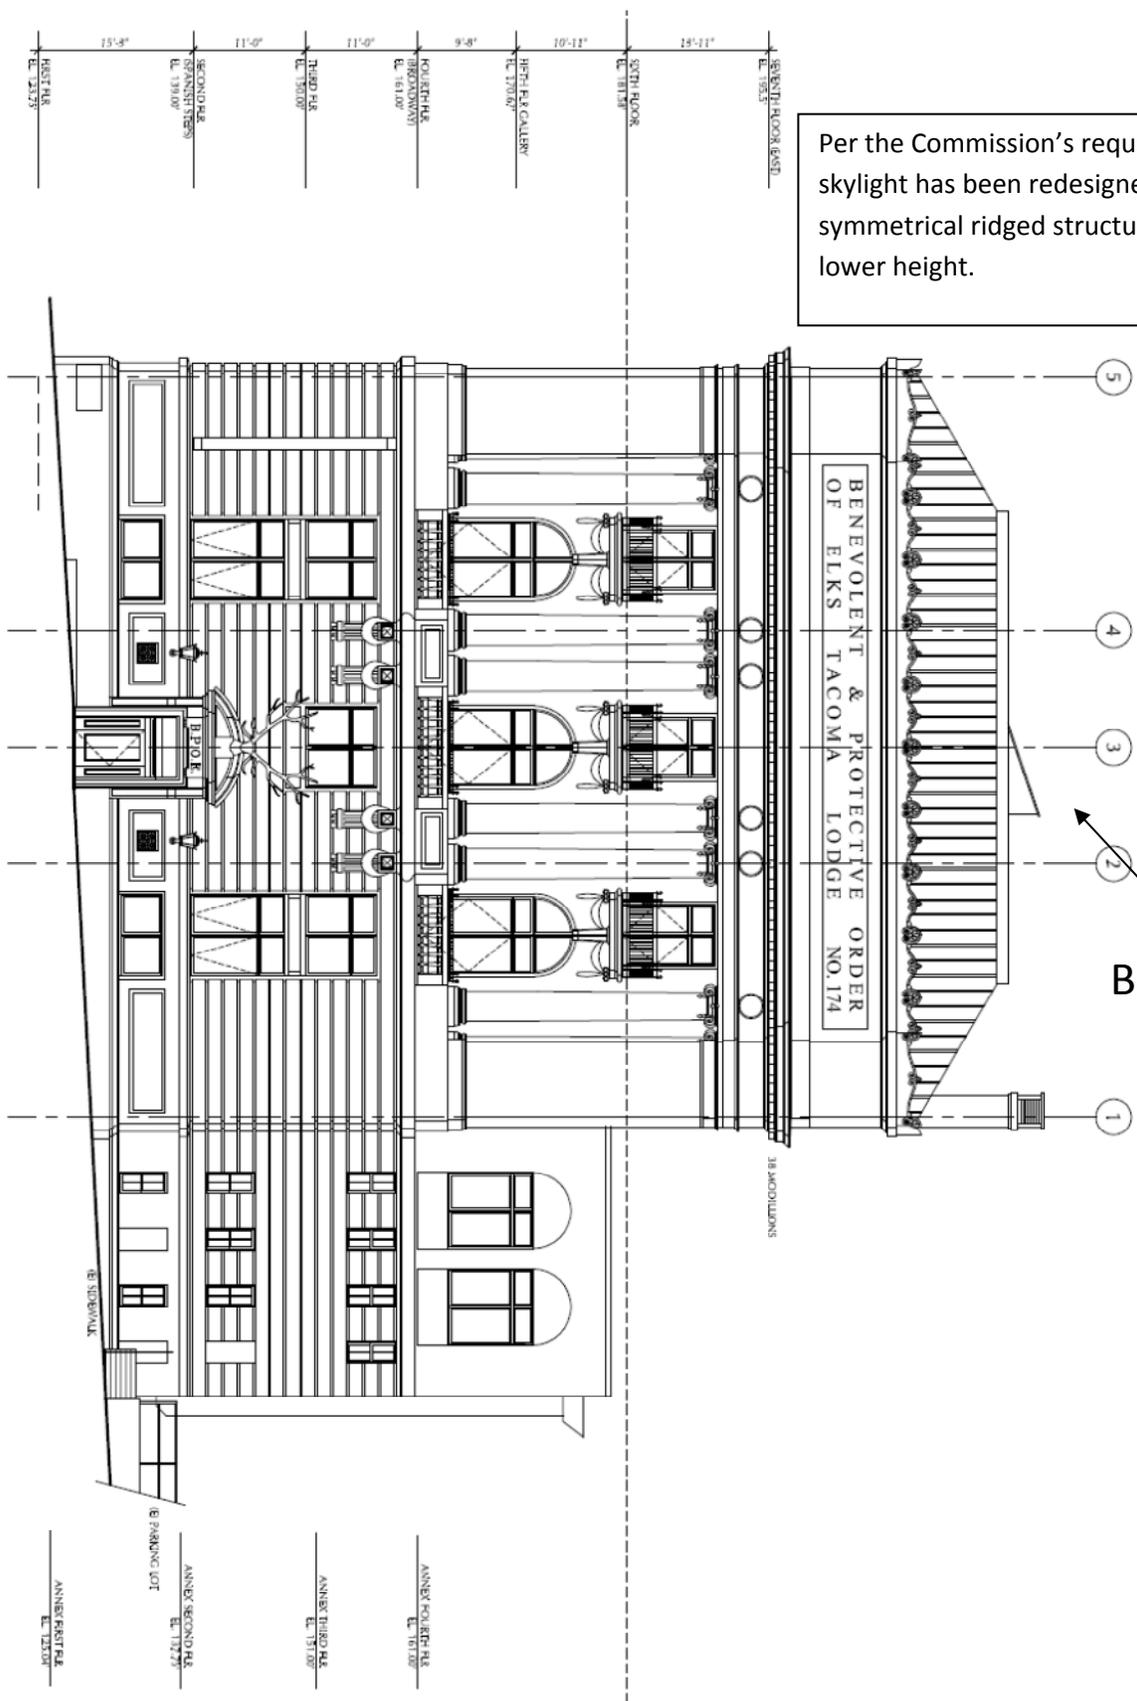

BEFORE

AFTER

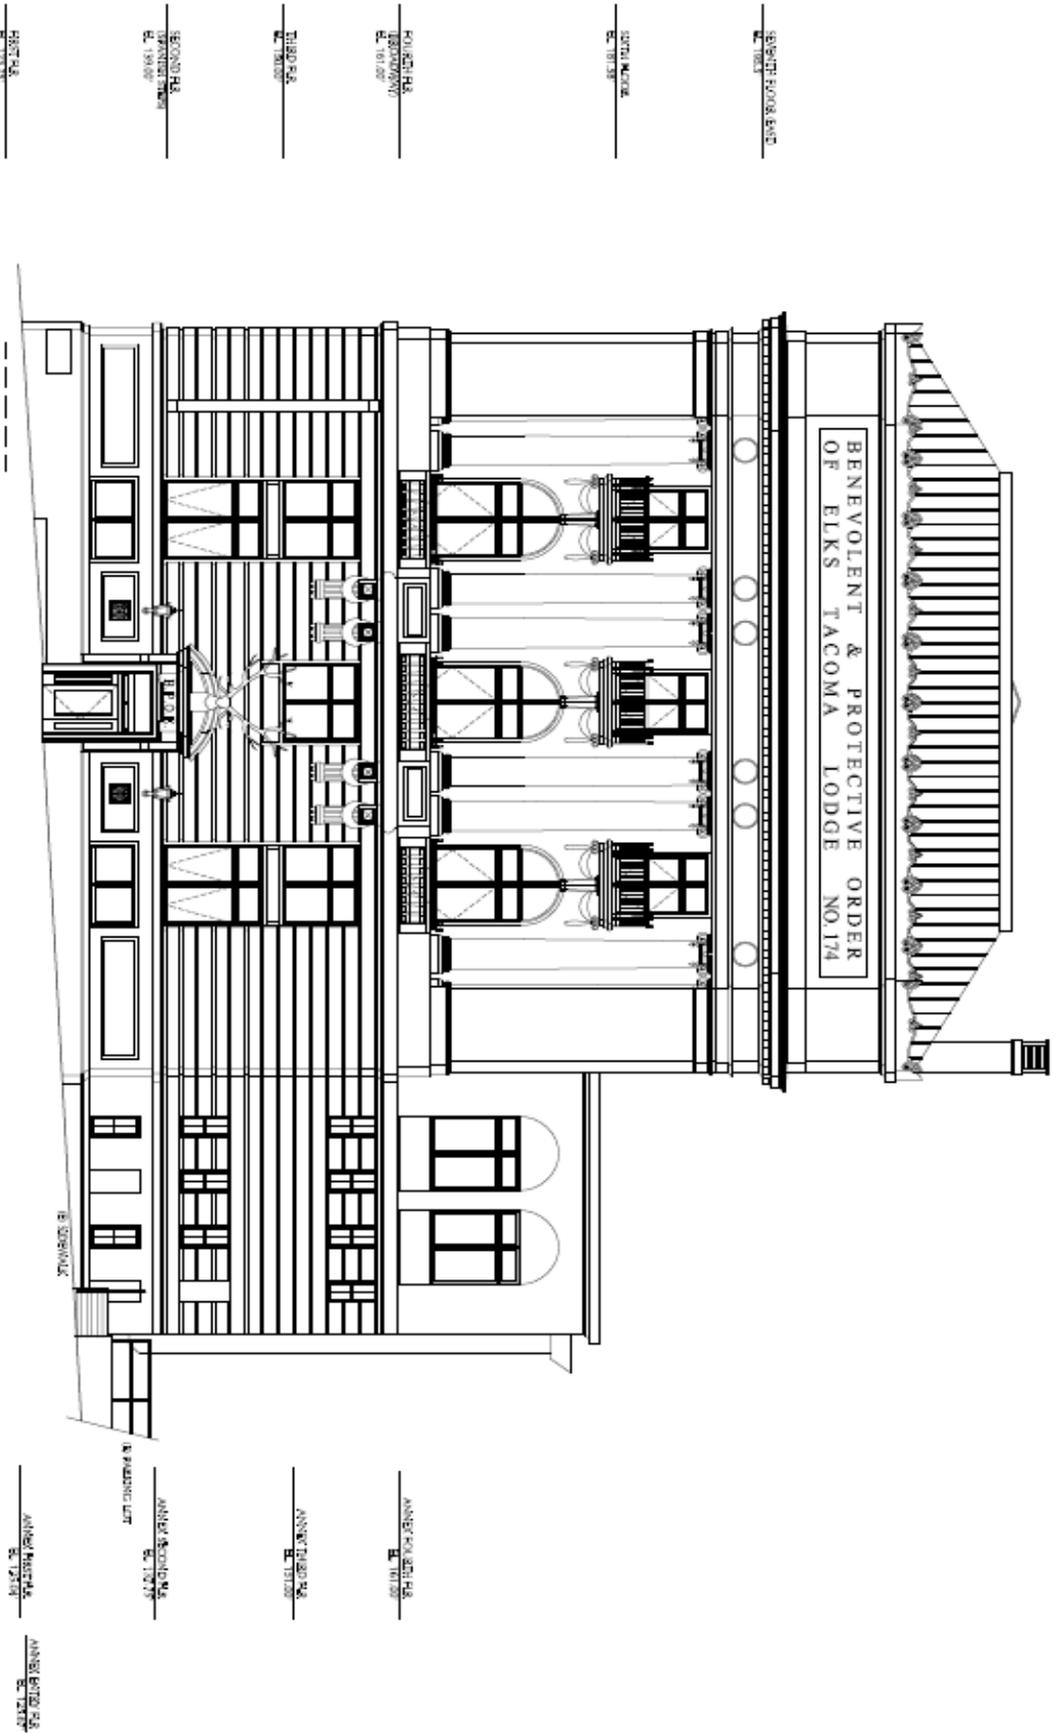

**Landmarks Preservation Commission**  
Tacoma Economic Development Department  
Culture and Tourism Division

Rec'd  
09-17-12



747 Market Street ♦ Room 1036 ♦ Tacoma WA 98402-3793 ♦ 253.591.5220

**APPLICATION FOR DESIGN REVIEW  
FOR SINGLE FAMILY RESIDENTIAL PROPERTIES**

Please include ALL of the following information with your application. Insufficient application materials will result in a delay in processing of your application. If you have any question regarding application requirements, or regulations and standards for historic homes and neighborhoods, please call the Historic Preservation Officer at 253.591.5220.

**PART 1: APPLICANT INFORMATION**

House Address 901 N K Landmark/Conservation District (if applicable) \_\_\_\_\_

**OWNER INFORMATION**

Name (printed) Kevin Lukinbill Email lukinbill\_kevin@comcast.net  
Address (if different than above) \_\_\_\_\_ Phone 226-2520  
Homeowner's Signature\* [Signature]  
*\*Application must be signed by the property owner to be processed.*

**CONTRACTOR INFORMATION**  
*If application will be presented by a representative or contractor, please fill in the following.*

Representative's Name \_\_\_\_\_ Company \_\_\_\_\_  
Address N/A \_\_\_\_\_  
Email \_\_\_\_\_ Phone \_\_\_\_\_

**FOR OFFICE USE ONLY**

PRELIMINARY PLAN CHECK DATE: \_\_\_\_\_  
INITIALS CHECKED FOR BUILDING CODE\*: [Signature] 9/7/12  
LAND USE/ZONING (IF APPLICABLE)\*: N/A  
\*PRELIMINARY PLAN CHECK IS NOT AN APPROVAL OF A PROJECT. A SEPARATE PERMIT APPLICATION MAY BE REQUIRED.

**APPLICATION FEE (please see page 2)**

Estimated Project Cost, rounded to nearest \$1000 3000<sup>00</sup>

Application Fee Enclosed \_\_\_\_\_

## PART 2: INFORMATION FOR APPLICANTS

### \*NEW\* FEE SCHEDULE

On March 21, 2006 City Council adopted a new administrative fee schedule, which includes application fees for design review of historic properties (Res. No. 36804).

The following fees are based on estimated project cost and apply to design review for historic single family properties:

Project Cost	Fee
\$0 – 2000	\$50
Each additional \$1000	\$25
Maximum Fee per Application	\$500
Application for Demolition	\$1500
Signs and Awnings	\$100 flat fee

#### PLEASE NOTE:

1. Fees are required only once per application.
2. If an application is denied by the Landmarks Commission, and a new application is submitted for the same project, new fees may apply.
3. Demolition fees are applied to cover the cost of public hearings, but may not be required for the removal of certain accessory structures.

## HOW TO USE THIS FORM

### STEPS FOR APPLICANTS

1. **Review the Standards and Guidelines for Historic Buildings.** Many homeowners want to know whether their project will be approved by the Commission ahead of the meeting. The Landmarks Commission reviews projects according to design guidelines and the Secretary of the Interior's Guidelines for Rehabilitation. This information is available online at [www.tacomaculture.org](http://www.tacomaculture.org).
2. **Fill out this form in its ENTIRETY.**
3. **Find the correct checklist for your project, and submit the required supporting documentation.** Part 4 of this form outlines which checklist to use for your project. There are three checklists, but you only need to use one.
4. **Submit your application for preliminary review to the Buildings and Land Use Division (BLUS). The Plans Reviewer will initial and date the cover sheet of this application.** This ensures your application meets applicable codes and will avoid delays down the road. Your application will **NOT** be processed without this step.
5. **Make 20 copies of the final application and submit it to the Historic Preservation Office with the APPLICATION FEE.** The Landmarks Commission meets on the 2<sup>nd</sup> and 4<sup>th</sup> Wednesdays of each month, and applications are due to this office TWO WEEKS in advance. When your application has been scheduled for review, you will be notified.

#### WHERE TO GO:

Buildings and Land Use Division  
City of Tacoma, Public Works Department  
747 Market Street, 3<sup>rd</sup> Floor  
253-591-5030

Historic Preservation Officer  
City of Tacoma, C.E.D.D.  
747 Market Street, Room 1036  
Tacoma, WA 98402-3793  
253-591-5220

### PART 3: PROJECT DESCRIPTION

Please describe below the overall scope of work, including all proposed new construction, changes to existing buildings, and any elements to be removed and replaced. (For complex remodeling projects, it may be beneficial to divide the description into different areas [north façade, west façade] or by type of work [windows, doors, siding]).

Attach additional pages if needed.

- ① Install 1 exterior door rear (North) side of home
- ② Install two windows on rear & 1 window on East side, back corner of home.

Windows are Marvin (Clad) wood  
Double hungs in exist openings.

Door is Jeldwin Metal 9 light ext.  
door.

## PART 4: SUPPLEMENTS

### How to Use This Table

The following is a table of common projects divided into Categories. For each Category of work there is a corresponding **checklist** designed to help you include the information required for your application.

Find the type of work you are proposing, and download the corresponding checklist to attach to your application.

Checklists are available from the Historic Preservation Office, and on our website at [www.tacomaculture.org/historic.asp](http://www.tacomaculture.org/historic.asp)

If you have any questions regarding what information should be included in your application, please call the Historic Preservation Office at 253-591-5220.

**NOTE: ONLY USE ONE CHECKLIST**

<input type="checkbox"/> Use Checklist A for:	Detached garages New porches Decks Additions Foundations Other Major Work (call the Historic Preservation Officer with questions)	p. 5
<input type="checkbox"/> Use Checklist B for:	Siding Roofing New window or door openings Other Minor (For example, chimney restoration)	p. 6
<input type="checkbox"/> Use Checklist C for:	Windows (replacement or restoration of existing) Doors (replacement or restoration of existing)	p. 7

### RESIDENTIAL APPLICATION CHECKLIST A

(For Garages, Porches, Decks, Additions, Foundations and other Major Projects)

CHECKLIST to include the following:\*

<input type="checkbox"/>	Accurate Measured Site Plan (which shows ridgelines and dormers of <u>existing</u> and <u>new</u> buildings)
<input type="checkbox"/>	Accurate Measured Elevation Drawings (all sides, with dimensions, siding materials, windows, and doors indicated)
<input checked="" type="checkbox"/>	Photograph(s) of Site and surrounding area <span style="float: right;">See photos</span>
<input checked="" type="checkbox"/>	Detail illustrations of trim, casing, balusters, posts and railings (if applicable)
<input type="checkbox"/>	Material samples (ie. stained glass, or if proposing uncommon material)
<input type="checkbox"/>	Paint samples (from hardware store)

In addition to the above, please provide the following information:

Size of new construction (footprint, i.e. 22 X 30'):	N/A
Overall height and pitch of roof (for new buildings):	N/A
Exterior cladding material(s):	
Window types and materials:	See Project Description
Door types and materials:	" "
Window trim (attach drawings, catalog sheets, etc. if necessary):	Cedar 3/4 x 6
Roof Material:	N/A

- \*ADDITIONAL TIPS**
- Drawings required for building permits can often be used for Landmarks Review, as long as information regarding finish detail, exterior materials, and windows and doors are indicated.
  - For information about drawing site plans, please refer to BLUS Publication B1, Site Plan
  - Elevations should be scale drawings and should include dimensions, heights, window and door locations, eave overhangs, trim details, and the locations of materials and other elements.
  - Please include a photograph of existing house (for new garages if the new garage is to match any existing features of the house)
  - For structures within the North Slope Historic District, refer to the North Slope Design Guidelines for more information about design. Contact the Historic Preservation Officer for more information.

**RESIDENTIAL APPLICATION SUPPLEMENT CHECKLIST B**  
**(For New Siding, Roofing, and Window and Door Openings)**

CHECKLIST to include the following:\*

- |                                     |   |
|-------------------------------------|---|
| <input type="checkbox"/>            | Elevation drawings (if new windows or doors are to be added where there are no existing ones) |
| <input checked="" type="checkbox"/> | Photograph(s) of work area(s)   |
| <input type="checkbox"/>            | Detail illustrations of trim and casing   |
| <input type="checkbox"/>            | Material samples (if proposing uncommon or new to market material)                            |
| <input type="checkbox"/>            | Paint samples (from hardware store if applicable)   |

In addition to the above, please provide the following information:

Proposed Material(s): \_\_\_\_\_

Window types and locations: \_\_\_\_\_

Exterior cladding material(s): \_\_\_\_\_

**\*ADDITIONAL TIPS**

- Drawings required for building permits can often be used for Landmarks Review, as long as information regarding finish detail, exterior materials, and windows and doors are indicated.
- Elevations should be scale drawings and should include dimensions, heights, window and door locations and trim details.
- Please include a photograph of existing examples (if the new features are to match any existing features of the house)
- For structures within the North Slope Historic District, refer to the North Slope Design Guidelines for more information about design. Contact the Historic Preservation Officer for more information.

**RESIDENTIAL APPLICATION SUPPLEMENT CHECKLIST C**  
(for Window and Door Replacement and Restoration)

CHECKLIST include the following:\*

<input checked="" type="checkbox"/>	Photograph(s) of work area(s) with locations of work indicated (i.e. in pen)
<input type="checkbox"/>	Detail illustrations of trim and casing and window profiles
<input type="checkbox"/>	Catalog cut sheets or product samples

In addition to the above, please provide the following information:


Narrative list of window and door types and locations: _____
--

<p><b>*ADDITIONAL TIPS</b></p> <ul style="list-style-type: none"><li>• <i>Drawings required for building permits can often be used for Landmarks Review, as long as information regarding finish detail, exterior materials, and windows and doors are indicated..</i></li><li>• <i>Please include a photograph of example elements (if new windows or doors are to match any existing features of the house)</i></li><li>• <i>For structures within the North Slope Historic District, refer to the North Slope Design Guidelines for more information about design. Contact the Historic Preservation Officer for more information.</i></li></ul>
---





08/21/2012 13:17

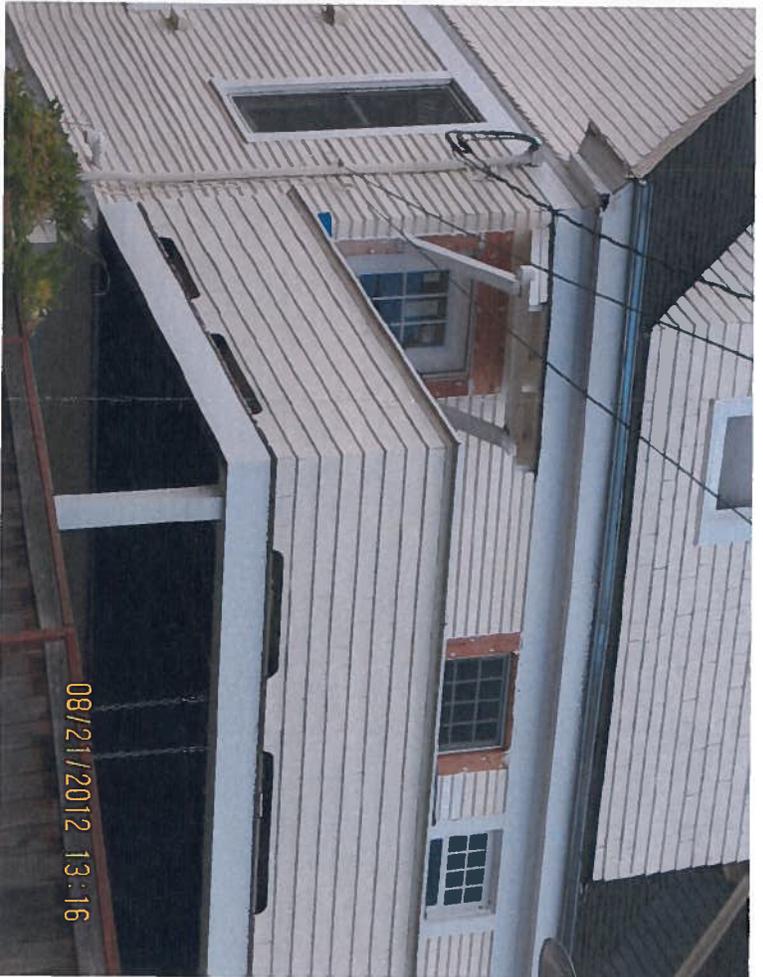

08/21/2012 13:16



2008 photo,  
property file  
901 N K Street, North Slope



Draft [8-9 \(89/1407/12\)](#)

**Chapter 2.01**

**MINIMUM BUILDING AND STRUCTURES CODE**

**Sections:**

- 2.01.010 Title.
- 2.01.020 Purpose.
- 2.01.030 Scope.
- 2.01.040 Additions, alterations, and change of use.
- 2.01.050 Definitions.
- 2.01.060 Administration and Process.
- 2.01.070 Minimum building requirements.
- 2.01.080 Repair standards.
- 2.01.090 Unoccupied or vacant building standards.
- 2.01.100 *Repealed.*
- [2.01.110 Recovery of Costs and Expenses.](#)
- [2.01.120 Repeat Offenders.](#)

**2.01.010 Title.**

This Title shall be known as the "Minimum Building and Structures Code," and is referred to herein as "this chapter." (Ord. 26380 § 1; passed Mar. 16, 1999; Ord. 21454 § 1; passed Aug. 29, 1978; Ord. 17842 § 1; passed May 18, 1965; Ord. 15742 §§ 1-13; passed Nov. 13, 1956)

**2.01.020 Purpose.**

The purpose of this chapter is for the protection of the health, safety, and welfare of [the](#) occupants and that of the general public by:

- A. Establishing minimum standards for basic equipment and facilities for construction, light, ventilation, heating, sanitation, security, fire, and life safety in structures.
- B. Encouraging the maintenance and improvement of the City's existing buildings, structures, yards, streets, neighborhoods, and other property.
- C. Avoiding the closure or abandonment of buildings and the displacement of occupants.
- D. Encouraging the use of innovative and economical materials and methods of construction while maintaining minimum levels of safety in buildings in the City.
- E. Promoting maintenance of existing property by recognizing differences between new and existing structures as long as an equal level of safety can be achieved.
- F. Providing for administration and enforcement of this chapter. (Ord. 26380 § 1; passed Mar. 16, 1999; Ord. 21454 § 2; passed Aug. 29, 1978; Ord. 16384 § 2;

passed June 29, 1959; Ord. 15742 §§ 1-13; passed Nov. 13, 1956)

**2.01.030 Scope.**

The provisions of this chapter shall apply to all buildings and the properties on which they are located, including, but not limited to, residential, commercial, and industrial uses. Buildings in existence at the time of the adoption of this chapter may have their existing use or occupancy continued, if such use or occupancy was legal at the time of the adoption of this chapter, provided such use is not changed in intensity from its original purpose and such continued use is not dangerous to the ~~life~~, health, safety, or welfare of the occupants or the general public. Buildings in which the use is changed to a use of equal or less intensity as set forth in the ~~UCBC-IEBC~~ may be permitted without full compliance with the Building Code, provided the building complies with this chapter and the ~~UCBC IEBC~~ for said use. (Ord. 26715 § 1; passed Oct. 17, 2000; Ord. 26380 § 1; passed Mar. 16, 1999; Ord. 15742 §§ 1-13; passed Nov. 13, 1956)

**2.01.040 Additions, alterations, and change of use.**

A. General. Buildings and structures to which additions, alterations, or changes of use are made shall comply with the applicable requirements of the Building Code for new facilities, except as specifically provided in this section. See the Building Code for provisions requiring installation of smoke detectors in existing Group R Occupancies.

B. When Allowed. Additions or alterations shall not be made to an existing building or structure which will cause the existing building or structure to be in violation of any of the provisions of the Building Code or this chapter, nor shall such additions or alterations cause the existing building or structure to become unsafe. An unsafe condition shall be deemed to have been created if an addition or alteration will cause the existing building or structure to become structurally unsafe or overloaded; will lessen or render unsafe existing egress systems complying with the requirement for the use in effect at the time the building was constructed, and approved by a certificate of occupancy; or will reduce required fire resistance or will otherwise create conditions dangerous to human life.

Additions or alterations shall not be made to an existing building or structure when such existing building or structure is not in full compliance with the provisions of the Building Code.

Exceptions:

1. When such addition or alteration will result in the existing building or structure being no more hazardous based on life safety, fire safety, and sanitation, than before such additions or alterations are undertaken, and such addition or alteration is in compliance with the [UCBC/EBC](#). (See the Building Code for Group H, Division 6 Occupancies.)

2. Alterations of existing structural elements, or additions of new structural elements, which are not required by this chapter or the Building Code and which are initiated for the purpose of increasing the lateral-force-resisting strength or stiffness of an existing structure need not be designed for forces conforming to the Building Code, provided that an engineering analysis is submitted to show that:

- a. The capacity of existing structural elements required to resist forces is not reduced, and
- b. The lateral loading to required existing structural elements is not increased beyond their capacity, and
- c. New structural elements are detailed and connected to the existing structural elements as required by the Building Code, and
- d. New or relocated non-structural elements are detailed and connected to existing or new structural elements as required by the Building Code, and
- e. An unsafe condition as defined above is not created.

C. Non-structural. Alterations or repairs to an existing building or structure which are non-structural and do not adversely affect any structural member or any part of the building or structure having required fire resistance may be made with the same materials of which the building or structure is constructed.

D. Glass Replacement. The installation or replacement of glass ~~shall~~ be as required for new installations. [Historic structures may require an exception.](#)

E. Restoration of Buildings. Restoration of buildings ~~shall~~ [may be required to](#) be in accordance with the applicable provisions of the Building Code and this chapter.

F. Buildings Designated as ~~Historic~~-Landmarks or Located ~~in~~ [in Historic Special Review or Conservation Districts](#) ~~Historically Designated Areas~~. Buildings or structures which are designated as ~~Historic~~-City Landmarks or are located in designated ~~Historic~~ [Historic Special Review or Conservation](#) Districts shall require the approval of the City of Tacoma Landmarks Preservation Commission before making additions, repairs, or alterations to the building or structure, or before demolishing the building or structure, [per](#)

[Tacoma Municipal Code \(TMC\) 13.05](#). (Ord. 26380 § 1; passed Mar. 16, 1999; Ord. 16384 § 3; passed Jun. 29, 1959; Ord. 15742 §§ 1-13; passed Nov. 13, 1956)

**2.01.050 Definitions.**

For the purpose of this chapter, certain terms, phrases, words, and their derivatives shall be construed as specified in this section. Terms, phrases, and words used in the singular include the plural, and the plural the singular. Terms, phrases, and words used in the masculine gender include the feminine, and feminine the masculine.

Where terms, phrases, and words are not defined herein, their definition shall be taken from the Building Code and, if not defined therein, shall have their ordinary accepted meaning within the context which they are used. *Webster’s Third New International Dictionary of the English Language, Unabridged, [most current version](#) copyright 1986*, shall be considered as providing ordinary accepted meanings.

“Accessory structure” is any structure which is incidental and subordinate to the main building(s) and is located on the same property as the main building. Accessory structures may be attached to or detached from the main structure. Examples of accessory structures include: garages, carports, sheds, and other similar buildings; decks, awnings, heat pumps, fences, trellises, flag poles, tanks, towers, exterior stairs and walkways, and other exterior structures on the property.

“Accessory use” is a use customarily incidental and subordinate to the main building or principal use and located on the same lot ~~therewith~~.

“Apartment house” is any building, or portion thereof, which contains three or more dwelling units and, for the purpose of this chapter, includes condominiums.

“Approved” (as to materials and types of construction) refers to approval by the Building Official as the result of investigation and tests conducted by the Building Official, or by reason of accepted principles or tests by recognized authorities, or technical or scientific organizations.

“Basement” is any floor level below the first story in a building, except that a floor level in a building having only one floor level shall be classified as a basement, unless such floor level qualifies as a first story as defined herein.

“Bathroom” is a room used for personal hygiene and which contains a water closet, a lavatory, and either a bathtub or a shower.

“Bathtub” is a container for personal washing, large enough to allow the person to sit partially submerged in water.

“Blight” is a condition of deterioration, dilapidation, decay, or substandard maintenance of buildings, structures, and/or properties which constitutes a menace to the health, safety, or welfare of the public or which negatively affects the value of surrounding property.

“Blighting conditions” are violations of this chapter, the Building Code, or other City ordinances, which are determined by the Building Official to be detrimental to the health, safety, or welfare of the public.

“Boarding house” is a lodging house in which meals are provided.

“Building” is any structure used or intended for supporting or sheltering any use or occupancy.

“Building, existing” is a building erected prior to the adoption of this chapter, or one for which a legal building permit has been issued.

“Building Code” shall mean the Building Code as adopted and amended by Chapter 2.02 of the Tacoma Municipal Code.

“Building Inspector” is an authorized representative of the Building Official, whose primary function is the inspection of buildings and/or the enforcement of the City ordinances, ~~assigned to the Building and Land Use Services Division for administration and enforcement.~~

“Building Official” shall mean the persons officially appointed as the City building official Manager of the Building and Land Use Services Division and of the Public Works Department of the City of Tacoma, charged with the administration and enforcement of the Building Code, or his or her duly authorized representatives.

“Ceiling height” shall be the clear vertical distance from the finished floor to the finished ceiling.

“Certificate of ~~complaint~~ Complaint” is a Findings of Fact and Order, or other document, filed with the Pierce County Auditor, stating the property is in violation of Chapter 2.01 of the Tacoma Municipal Code.

“City” means, the City of Tacoma.

“City landmark” is a property that has been individually listed on the Tacoma Register of Historic Places, or that is a contributing property within a Historic Special Review or Conservation District as defined in Chapter 13.05 of the Tacoma Municipal Code.

“Congregate residence” is any building, or portion thereof, which contains facilities for living, sleeping, and sanitation, as required by this chapter, and may include facilities for eating and cooking for occupancy by other than a family. A congregate residence may be a shelter, convent, monastery, dormitory, or fraternity or sorority house, but does not include jails, hospitals, nursing homes, hotels, or lodging houses.

“Court” is a space, open and unobstructed to the sky, located at or above grade level on a lot and bounded on three or more sides by walls of a building.

“Dangerous buildings or structures” means, for the purpose of this chapter, any building or structure having conditions or defects which exist to the extent that the ~~life, health, property, or safety,~~ or welfare of the public or its occupants are endangered. Specific conditions which determine whether a building is dangerous are listed in Table E – Dangerous Buildings and Structures, in Section 2.01.060.

“Derelict buildings or structures” means, for the purposes of the chapter, any building or structure where conditions exist which make the building or structure unfit for human occupancy. Specific conditions which determine whether a building or structure is derelict are listed in Table D – Derelict Buildings or Structures, in Section 2.01.060.

“Dormitory” means:

- A. A college or university residence hall, including sorority or fraternity buildings; or
- B. A room containing three or more beds and serving as communal sleeping quarters.
- C. See also congregate residence.

“ Dwelling” is any building or portion thereof which contains not more than two dwelling units.

“ Dwelling unit” is any building or portion thereof which contains living facilities, including provisions for sleeping, eating, cooking, and sanitation, as required by this chapter, for not more than one family, or a congregate residence for ten or less persons.

“Efficiency dwelling unit” is a dwelling unit containing only one habitable room.

“Enforcement” is the administrative process, within the legal authority of federal, state, and local law, that permits the Building and Land Use Services Division ~~City~~ to assure compliance with the provisions of this chapter.

“Exit” is a continuous and unobstructed means of egress to a public way and shall include, but is not limited to, intervening aisles, doors, doorways, gates, corridors, exterior exit balconies, ramps, stairways,

pressurized enclosures, horizontal exits, exit passageways, exit courts, and yards.

“Exterior property area” is the open space on the premises and on public property abutting the premises under the control of the owner or on-site manager of such premises.

“Extermination” is the elimination of insects, rodents, vermin, or other pests at or about the affected building.

“Family” is an individual or two or more persons related by blood or marriage, or a group of not more than five persons (excluding household employees) who need not be related by blood or marriage, living together in a dwelling unit.

“Final ~~order~~Order” means any order of the Board of Building Appeals, Hearing Examiner or Hearing Officer, where an appeal is not ~~taken~~ filed within the time provided by law.

“Fire Chief” is the head of the [Tacoma Fire Department](#) or a duly authorized representative.

“Floor area” is the area included within the surrounding exterior walls of a building or portion thereof, exclusive of vent shafts and courts. The floor area of a building, or portion thereof, not provided with surrounding exterior walls shall be the usable area under the horizontal projection of the roof or floor above.

“Grade” (adjacent ground level) is the lowest point of elevation of the finished surface of the ground, paving, or sidewalk within the area between the building and the property line or, when the property line is more than 5 feet from the building, between the building and a line 5 feet from the building.

“Graffiti” is any unauthorized writing, painting, drawing, inscription, figure, or mark of any type that has been placed upon any property through the use of paint, ink, chalk, dye markers, objects, or any other substance capable of marking property.

“Guest” is any person renting or occupying a room for living or sleeping purposes.

“Guest room” is any room or rooms used, or intended to be used, by a guest for sleeping purposes. Every 100 square feet of superficial floor area in a dormitory is a guest room.

“Habitable space” or “habitable room” is space in a structure for living, sleeping, eating, or cooking. Bathrooms, toilet compartments, closets, halls, storage or utility space, and similar areas, are not considered habitable space.

“Health Officer” is the Director of the Tacoma-Pierce County Health Department, or his or her duly authorized representatives.

“Hearing Officer” is the Director of the Public Works Department, or a duly authorized representative.

“Historic resource” is [any property that has been determined to be eligible by the City Historic Preservation Officer or Washington State Department of Archaeology and Historic Preservation staff for listing in the Tacoma Register of Historic Places, the Washington State Heritage Register, or the National Register of Historic Places, or any property that appears to be eligible for such listing by virtue of its age, exterior condition, or known historical associations.](#)

“Hotel” is any building containing six or more guest rooms intended or designed to be used, or which are used, rented, or hired out to be occupied, or which are occupied, for sleeping purposes by guests. It does not include any jail, hospital, asylum, sanitarium, orphanage, prison, detention home, or other institution in which human beings are housed and detained under legal restraint.

“IEBC” is [the International Existing Building Code, as adopted and amended by the City in Chapter 2.02 of the Tacoma Municipal Code.](#)

“Improper” shall mean unsuitable, inappropriate, or not up to acceptable minimum standards.

“Infestation” is the presence of insects, rodents, vermin, or other pests to a degree that is harmful to the building or its occupants.

“Inspection” is the examination of property by the Building Official, or his or her duly authorized representative, for the purpose of evaluating its condition as provided by this chapter.

“Interested party” is any person or entity that possesses any legal or equitable interest of record in a property, including, but not limited to, the holder of any lien or encumbrance on the property.

“Kitchen” shall mean a room used, or designed to be used, for the preparation of food.

“Lavatory” is a fixed wash basin connected to hot and cold running water and the building sanitary waste system and used primarily for personal hygiene.

“Licensed care” shall include buildings, structures, or portions thereof, used for the business of providing licensed care to clients in one of the following categories regulated by either the Washington ~~State~~ Department of Health or the [Washington State Department of Social and Health Services](#):

- A. Adult family home.
- B. Adult residential rehabilitation facility.
- C. Alcoholism - intensive inpatient treatment service.
- D. Alcoholism - detoxification service.
- E. Alcoholism - long-term treatment service.
- F. Alcoholism - recovery house service.
- G. Boarding home.
- H. Group care facility.
- I. Group care facility for severely and multiple handicapped children.
- J. Residential treatment facility for psychiatrically impaired children and youth.

Exception: Where the care provided at an alcoholism alcohol detoxification service is acute care similar to that provided in a hospital, the facility shall be classified as a hospital.

~~“Local agent” is a person, firm, corporation, or other legal entity:~~

- ~~A. Whose principal residence and/or property management office, and place of receiving mail, is located either within Pierce County or within a 50-mile radius of the Tacoma Municipal Building;~~
- ~~B. Who is the person, firm, or corporation designated by the owner to receive official mail from the City regarding maintenance of the property and actions taken by the City under this chapter; and~~
- ~~C. Who is authorized by the owner to act on behalf of the owner in such matters.~~

“Lodging house” is any building or portion thereof containing not more than five guest rooms where rent is paid in money, goods, labor, or otherwise.

“Maintenance” means keeping property in proper condition.

“Motel” (See Hotel).

“Nuisance” is any of the following:

- A. Any public nuisance known at common law or as defined by legal court, especially nuisances defined in Chapter 8.30 of the Tacoma Municipal Code.
- B. Whatever is dangerous to human life or is detrimental to health, safety and welfare.

“Occupancy” is the lawful purpose for which a building, or part of a building, is used or intended to be used.

“Occupant” is any person (including owner or on-site manager) occupying a structure or portion of a structure.

“On-site manager” is any person on site, representing the owner, who has charge, care, or control for the day-to-day operations of a building or portion of a building offered for occupancy.

“Owner” is any person, including any natural person, joint venture, partnership, association, club, company, corporation, business trust, or organization, or the manager, lessee, agent or officer, or having an interest in the real estate in question as indicated in the records of the office of the Pierce County Assessor, or who establishes, under this chapter, his or her ownership interest therein.  
~~agent, firm, or corporation having a legal or equitable interest in the property.~~

“Partially Secured” means a portion of a building sealed to the weather or unauthorized third-party entry.

“Person” is a natural person, his or her heirs, executors, administrators, or assigns, and also includes a firm, partnership, or corporation, its or their successors or assigns, or the agent of any of the aforesaid.

“Plumbing” or “plumbing fixture” is any water heating facilities, water pipes, vent pipes, garbage or disposal units, lavatories, water closets, urinals, bathtubs, shower baths, installed clothes-washing machines or other similar equipment, catch basins, sanitary waste systems, storm sewer systems, vents, or other similarly supplied fixtures, together with all connections to water, gas, sewer, or vent lines.

“Posted” is the placement of an official notice that a building or structure is in violation of this chapter. The notice is attached to the building or structure and states “MUST NOT BE OCCUPIED.”

“Public right-of-way” includes the area of ~~land~~, the right of possession of which is secured by the City for right-of-way purposes and includes the traveled portion of the public streets and alleys, as well as the border area, which includes, but is not limited to, sidewalks, driveway approaches, planting strips, traffic circles, parkways or medians, or the ~~at~~ area between the sidewalk and the curb line.

“Recreational vehicle” is a vehicle constructed to be licensed for operation on streets, highways, and waterways. Recreational vehicles are designed to provide accommodations for sleeping, and may have cooking facilities, water closets, sinks, lavatories, showers, and similar plumbing facilities. The four

Form

classifications of recreational vehicles are, but not limited to:

A. Motor Home. A self-motorized recreational vehicle.

B. Residential or Travel Trailer. A recreational vehicle designed to be towed by a motorized vehicle, including fifth-wheel trailers, tent trailers, or similar types of vehicles.

C. Campers. A recreational unit designed to be installed in and used while in the bed of a truck.

D. Boats on Trailers.

“Resident” is a person who lives or dwells in a residential structure or similar buildings, including, but not limited to, dwelling units, apartments, congregate care homes, licensed care homes, hotels, motels, convalescent homes, and nursing homes.

“Residential property” is any property zoned ~~for~~ exclusively for residential use or any property containing a residential structure.

“Residential rental property” is any property within the City containing a dwelling unit for which payment of money, goods and/or services is rented or leased to an individual or group of individuals.

“Residential structure” is any building containing one or more dwelling units,

~~or any accessory structure related to a dwelling unit.~~

“Restoration” means to return a building or structure to a state of utility through alterations and/or repairs. As applied to historic structures, it includes the preservation of those portions or features that are of historical, architectural, and cultural value.

“Roof” is an exterior element of a building, sloped less than 60 degrees from the horizontal, which provides weather protection to the spaces below.

“Secured” refers to a building which is sealed to unauthorized third-party entry.

“Service room” is any room used for storage, bath, or utility purposes, and not included in the definition of habitable rooms.

“Shaft” is an interior space, enclosed by walls or construction, extending through one or more stories or basements which connects openings in successive floors, or floors and roof, to accommodate elevators, dumbwaiters, mechanical equipment, electrical equipment, or similar devices, or to transmit light or ventilation air.

“Shall,” as used in this chapter, is mandatory.

“Sink” is a fixed basin connected to hot and cold running water and a drainage system and primarily used for the preparation of food and the washing of cooking and eating utensils.

“Shower” is a compartment which is designed for the purpose of full personal washing of a person in the standing position.

“Skylight” is a glazed opening in a roof. Skylights can be either fixed or operable.

“Sleeping room” is any room designed, built, or intended to be used for sleeping purposes.

“Smoke detector” is an approved, listed device that senses visible or invisible particles of combustion.

~~“Solid fuel burning device” means any device for burning wood, coal, or any other non-gaseous and non-liquid fuel.~~

“Story” is that portion of a building included between the upper surface of any floor and the upper surface of the floor next above, except that the topmost story shall be that portion of a building included between the upper surface of the topmost floor and the ceiling or roof above. If the finished floor level directly above a usable or unused under-floor space is more than 6 feet above grade, as defined herein, for more than 50 percent of the total perimeter, or is more than 12 feet above grade, as defined herein, at any point, such usable or unused under-floor space shall be considered as a story.

“Street” whether improved or unimproved, is any thoroughfare or public way which has been dedicated or deeded to the public for public use.

“Substandard Property,” for the purpose of this chapter, shall mean a building or property where conditions exist which make the building substandard. Specific conditions which determine whether a building or property are maintained in a substandard manner are listed in Table B – Substandard Property, and/or Table C – Fire and Life Safety Hazards, in Section 2.01.060. A substandard building or property may be occupied when, in the opinion of the Building Official, the conditions are not an immediate threat to health, safety, or welfare ~~the safety~~ of the occupants.

“Swimming pool” is an artificial basin, chamber, or tank constructed of impervious material, having a depth of 18 inches or more, and used or intended to be used for swimming, diving, or recreational bathing.

“Toilet”. See “water closet”.

“Transient occupancy” is the occupancy of a dwelling unit in a hotel where the following conditions are met:

- A. Occupancy is charged on a daily basis and is payable no less frequently than every two weeks;
- B. The operator provides maid and linen service on a regular basis;
- C. The period of occupancy does not exceed 30 days; and
- D. If the occupancy exceeds five days, the occupant has a business address or a residence other than at the hotel.

~~“UCBC” is the Uniform Code for Building Conservation, as adopted and amended by the City of Tacoma in Chapter 2.02 of the Tacoma Municipal Code.~~

“Unoccupied” is the condition where a building is not being used at present, but there is the general appearance of an intent to reoccupy the building in the future. Furnishings may or may not have been removed.

“Unsecured” refers to any building or structure in which doors, windows, or apertures are open or broken so as to allow unauthorized third-party entry.

“Vacant” is the condition where a building is not being used at present, and there is a general appearance of abandonment.

“Vermin” is an all inclusive term used to define unwanted, non-human, biological life and shall include, but not be limited to, mice, rats and other rodents, ants, fleas, lice, termites and other insect-like pests, pigeons and other birds, and other biological pests.

“Walls” shall be defined as follows:

- A. “Bearing wall” is any wall meeting either of the following classifications:
  1. Any metal or wood stud wall which supports more than 100 pounds per lineal foot of superimposed load.
  2. Any masonry or concrete wall which supports more than 200 pounds per lineal foot superimposed load, or any such wall supporting its own weight for more than one story.
- B. “Exterior wall” is any wall or element of a wall, or any member or group of members, which defines the exterior boundaries or courts of a building and which has a slope of 60 degrees or greater with the horizontal plane.
- C. “Faced wall” is a wall in which the masonry facing and backing are so bonded as to exert a common action under load.

D. “Nonbearing wall” is any wall that is not a bearing wall.

E. “Parapet wall” is that part of any wall entirely above the roof line.

F. “Retaining wall” is a wall designed to resist the lateral displacement of soil or other materials.

“Water closet” is a flushable plumbing fixture connected to running water and a drainage system and used for the disposal of human waste.

“Water closet compartment” is a room containing only a toilet or only a toilet and lavatory.

“Window” shall mean a glazed opening, including glazed doors, which open upon a yard, court, or a vent shaft open and unobstructed to the sky.

“Window well” is a soil-retaining structure at a window having a sill height lower than the adjacent ground elevation.

“Workmanship” is the quality or mode of execution for building construction normal to the building industry trades.

“Yard” is an open, unoccupied space other than a court, unobstructed from the ground to the sky, except where specifically provided by this chapter, on the lot on which a building is situated. (Ord. 26715 § 2; passed Oct. 17, 2000 Ord. 26380 § 1; passed Mar. 16, 1999: Ord. 24503 § 1; passed Dec. 12, 1989: Ord. 19217 § 1; passed Oct. 13, 1970: Ord. 16384 § 4; passed Jun. 29, 1959: Ord. 15742 §§ 1-13; passed Nov. 13, 1956)

**2.01.060 Administration and Process.**

**A. Initial Filing of Complaint.**

An initial enforcement determination shall be undertaken against buildings or properties, whenever:

1. The Building Official, the Public Works Director, the Director of the Tacoma-Pierce County Health Department, the Police Chief, or the Fire Chief, or their duly authorized representatives, have reason to believe that a violation of this Code exists.

2. A complaint is filed with the City of Tacoma Department of Public Works by any person, provided that where complaints have been filed by tenants, that the tenant first exhaust all remedies provided through the Washington State Landlord Tenant Act. Complaints may be received either verbally or in writing, and may be anonymous.

**B. Inspection and Evaluation of Buildings and Property.**

When a complaint has been filed, or there are other reasons pursuant to normal enforcement of the Tacoma

Form

Form

Municipal Code, the Building Official shall inspect the building and property. Based on the inspection, the Building Official shall then determine whether the building and/or property is in violation of this chapter and the degree of violation. All properties where an evaluation inspection is performed shall be evaluated against the standards of "Substandard Property" listed in Table B, "Fire and Life Safety Hazards" listed in Table C, "Derelict Buildings or Structures" listed in Table D, and "Dangerous Buildings or Structures" listed in Table E. Substandard Properties shall be assigned violation points, in accordance with Table B and Table C, and the provisions of Subsection C, Violation Tables. In addition, violations listed in Table C, "Fire and Life Safety Hazards," shall be referred to the Building Official, the Fire Chief, and/or the Electrical Inspection Manager, as appropriate, for evaluation as to whether immediate action is necessary. The standards against which properties shall be evaluated are set forth in Section 2.01.070, Minimum Building Requirements.

**C. Violation Tables.**

During the evaluation inspection, and any subsequent inspections of the building and property, the Building Official shall note each violation and evaluate the property in accordance with Table B, Table C, Table D, and Table E. Once all violations are listed, and if it is determined that the property is substandard, the points, as listed in Table B and Table C, for each violation listed against the property, shall be totaled to determine the degree of violation. The course or action shall be in accordance with Table A, and subsection D, Substandard Buildings and Structures.

Where a building or structure contains violations listed in Table D, Derelict Buildings or Structures, the building or structure shall be declared a Derelict Building or Structure and processed according to the procedures set forth in Subsection EF, Derelict Buildings or Structures Procedures.

Where a building or structure contains violations listed in Table E, Dangerous Buildings or Structures, that building or structure shall be declared a Dangerous Building or Structure and processed according to the procedures set forth in Subsection FG, Dangerous Buildings or Structures Procedures.

Groups of buildings on the same property may be processed under a single complaint process.

**D. Substandard Property Buildings and Structures**

~~1. General. Where all violations are unrelated to the buildings and structures on the property, the complaint against the property shall be processed under the applicable provisions of the Tacoma Municipal Code.~~

~~2. Standard Property. Property which has been inspected and evaluated, and which received 24 or less violation points, shall be considered standard property and in compliance with this chapter, and no action shall be taken. The complaint shall be closed and all accumulated documentation filed.~~

3.1. Non-Standard Property Warning. The owner of property which, by an external inspection, is evaluated as being maintained in a substandard condition and receives 25 to 49 violation points, shall may be considered non-standard property and sent a letter describing the substandard conditions and the appropriate actions for mitigating these conditions. The owner shall may be advised, in writing, that the property is in a declining state, and that if conditions worsen, more formal mitigating actions will may be undertaken.

~~Once the advisory letter is sent, the complaint shall be closed and all accumulated documentation filed. The property may be reinspected one year from the date of the letter and the property may be reevaluated to determine whether additional enforcement procedures need to be taken.~~

4.2. Substandard Property Violation. When any property has been inspected and receives 50 or more points as set forth in Table A, the owner shall be notified by letter that the property is "substandard", and the letter shall describe the violations and the appropriate actions for mitigating these violations.

5.3. Owner Notification, Penalties, Reinspection and Appeals for Substandard Properties shall all be governed by Subsection F, Building Enforcement Procedures.

**E. Derelict Buildings or Structures.**

1. General. This section shall apply to all buildings, structures, and properties, residential or commercial, which have been evaluated as being Derelict Buildings or Structures, in that the building or structure contains one or more violations listed in Table D, Derelict Buildings or Structures. By definition, Derelict Buildings or Structures are unfit for human occupancy.

2. Posting and Placement of Utility Restraint. Derelict Buildings or Structures shall be posted "MUST NOT BE OCCUPIED." See Subsection H, Posting of Buildings. Simultaneously, utility restraints shall may be placed on such buildings or structures. See Subsection I, Utility Restraints.

Buildings, which are posted, shall not be occupied for any purpose until repaired to eliminate the violations

listed in the Notice of Violation, to the satisfaction of the Building Official. In addition, the building shall only be authorized to be entered for preparing a ~~time schedule and~~ a repair plan ~~and schedule~~ to be submitted to the Department of Public Works for approval. Upon approval of the ~~time schedule and~~ repair plan ~~and schedule~~, the owner or his or her representatives will be authorized to enter the building to effect repairs. No other entry or occupancy of the building shall be permitted ~~until the repairs are completed and unless~~ approved by the Building Official.

3. Owner Notification, Penalties, Reinspection and Appeals for ~~Substandard and~~ Derelict Properties shall all be governed by Subsection F, Building Enforcement Procedures.

**F. Building Enforcement Procedures.**

1. Owner Notification and Penalties.

a. When any property has been evaluated, by inspection, as being “Substandard Property” or “Derelict Property”, the owner shall be notified by first class mail, describing the violations and stating that the building, structure, or property has been found to be in violation of this chapter and is “Substandard” or “Derelict.” The owner shall be given ~~30-21~~ calendar days from the date of the notice to respond to the Building Official to negotiate a repair ~~plan and~~ schedule.

If the building is designated as “Derelict Property”, the owner ~~shall may~~ be given 10 calendar days from the date of the notice to secure the building, in accordance with Section 2.01.090, Unoccupied or Vacant Building Standards. The notice shall include the standards for securing an unoccupied or vacant building. In addition, such notification will state that either an Eminent Domain Condemnation proceedings or a Dangerous Building proceedings may be initiated if there is not a ~~workable~~ agreed upon repair plan and schedule submitted or substantial improvement of the property does not occur in ~~substantial~~ compliance with the agreed upon repair plan and schedule. ~~Such proceedings may result in the loss of the building(s) and property or the demolition of the building(s).~~

b. In the event a valid response to the first notice outlined in subsection (a) is not received in the allotted time, a civil penalty in the amount of \$250, may be assessed. These penalties are intended to be only for remedial purposes. A new letter, stating the assessment of penalties, shall be sent by first class mail. The owner shall be given ~~14-10~~ calendar days from the date of the second letter to respond to the letter, and to negotiate a repair plan and schedule with

the Department of Public Works for correcting the violations to the satisfaction of the Building Official.

~~e. In the event a valid response to the second notice as outlined in subsection (b) is not received in the allotted time, an additional civil penalty in the amount of \$250 may be assessed. A third letter, stating the additional assessments of penalties, shall be sent by first class mail. The owner shall be given 14-10 calendar days from the date of the third letter to respond, and to negotiate a repair plan and schedule with the Department of Public Works for correcting the violations to the satisfaction of the Building Official.~~

~~cd.~~ The process described in Subsection ~~(be)~~ above shall be repeated on a regular schedule and a civil penalty may be assessed every day until such time as there is a valid response. In the event that no response is received and ~~assessed~~ penalties are equal to or exceeds ~~have accumulated in excess of~~ \$1,000.00, the City ~~shall may~~ file a Certificate of Complaint with the Pierce County Auditor to be attached to the title of the property. A copy of the Certificate of Complaint ~~may shall be~~ sent to the property owner and may be sent to all tenants, if different from the owner.

~~de.~~ Penalties shall be billed to the owner. Penalties unpaid after 60 calendar days may be referred to a collection agency, approved by the City of Tacoma, for collection.

~~ef.~~ Each day that a property or person is not in compliance with the provisions of this chapter may constitute a separate violation of this chapter.

2. Response to Notification. The response to the City shall be the development of a ~~written~~ repair plan and schedule for ~~repairing~~ the building, jointly agreed upon by the owner and the City. The schedule shall include:

a. Time for ~~developing and~~ submitting acceptable construction plans, specifications, and calculations when required for the repair of the building or structure.

b. Time for ~~actually~~ repairing the building or structure once a building permit has been issued. Such time line may include intermediate progress goals, as appropriate.

~~c. Once an acceptable schedule has been determined and agreed to, construction plans, specifications, and calculations when required for the repair of the building or structure shall be developed and submitted to the City for approval with the time limits set by the schedule.~~ Once the plans and specifications have been approved for permit, the permit shall be obtained within ~~14-7~~ calendar days of notification that the permit is ready. The work authorized by the permit shall

Form

~~proceed according to a schedule jointly agreed upon by the owner and the City, verified by inspection.~~

d. If permits are not required, the repair plan and schedule shall outline when the violations identified in the Substandard or Derelict Property Report will be corrected.

e. EXCEPTIONS:

The Building Official may grant extensions to the repair plan and schedule, or agree to an alternative repair plan and -schedule, for sufficient reasons on written request. Such requests must be filed with the Building Official prior to the deadlines set for the completion of the construction.

3. Reinspection and Penalties. Once a valid response is received and a schedule is set, the property shall be reinspected upon request by the owner, to assess that progress is being made in correcting the violations and adhering to the agreed upon schedule. If progress, in accordance to the schedule, is not being made to the satisfaction of the Building Official, or the owner has not scheduled a required inspection, penalties may be issued up to \$250 per day. ~~At each inspection of the property, the status of the action shall either remain in the present category or shifted to Derelict or Dangerous Buildings or Structures categories based on whether any of the violations are listed in Table D, Derelict Building and Structures or Table E, Dangerous Buildings or Structures.~~ Once an enforcement action is undertaken, it shall be continued until all outstanding violations have been corrected.

The Building Official may also issue penalties in the amount of \$250 per day- if after the initial contact, any of the following occur:

- a. the owner and the City cannot agree upon a repair plan and schedule, or extension thereto, or
- b. the owner does not submit plans and specifications for approval, according to the schedule, for the repair of the building, or
- c. the owner fails to obtain the permits in a timely manner when they are ready to be issued, or
- d. the owner fails to start repairs, or
- e. the owner, once having started repairs, fails to meet intermediate progress goals.

This penalty procedure shall be repeated in accordance with Subsection 1 above (Owner Notification and Penalties) until progress, satisfactory to the Building Official, is made.

4. Violations Corrected. Once the building, structure, and property violations have been corrected to the satisfaction of the Building Official, the case shall be closed and, if appropriate, a final report relative to the action placed in the City's files, and any Certificates of Complaint filed with the Pierce County Auditor against

the title of the property shall be removed by the City on payment of any assessed penalties and any costs incurred by the City for securing the property.

**5. Reviews by the Building Official.**

a. General. A person, firm, or corporation who received a Notice of Violation for a Substandard or Derelict Building(s), or a civil penalty, may request an administrative review of the Notice of Violation for a Substandard or Derelict Building(s) or the civil penalty.

An appeal of a civil penalty which has been issued in accordance with this chapter shall be limited to assessing any progress which the property owner has made in correcting the violations identified in the first notice, or the property owner's compliance with the repair plan and schedule that led to the issuance of the civil penalty.

b. How to Request Administrative Review.

i. Appeal of a Notice of Violation or Civil Penalty. A person, firm, or corporation may request an administrative review by the Building Official of the Notice of Violation for a Substandard or Derelict Building(s), by filing a written request with the Department of Public Works within 30-10 calendar days of the first notification date of violations.;

~~ii. Appeal of a civil penalty. A person, firm, or corporation may request an administrative review by the Building Official of a civil penalty by filing a written request with the Department of Public Works within 10 calendar days of the date the civil penalty was issued.~~

~~The request shall state in writing the reasons the Building Official should review the Notice of Violation or the issuance of the civil penalty. Failure to state the basis for the review in writing shall be cause for dismissal of the review. Upon receipt of the request for administrative review, the Building Official shall review the information provided.~~

c. Decision of Building Official. After considering all of the information provided, including information from the code enforcement officer and the City Attorney, or his or her designee, the Building Official shall affirm, or modify the Notice of Violation for the Substandard or Derelict Building(s), or the amount of any monetary penalty assessed. The Building Official's decision shall be delivered in writing to the appellant by first-class mail.

**6. Appeals of the Decision of the Building Official to Hearing Examiner.**

Appeals of the Decision resulting from the Building Official's Review shall be made to the Hearing Examiner within 30-21 calendar days from the date of the Building Official's Decision. The Hearing

Examiner, upon receipt of a properly filed appeal, shall set a hearing date, and the appellant shall be notified of the hearing date by first-class mail. Proceedings in regard to appeals filed under this section shall be conducted in accordance with the requirements of Tacoma Municipal Code [Chapter 1.23](#) and Office of the Hearing Examiner Rules of Procedure for Hearings. The Hearing Examiner shall issue [a](#) Findings of Fact and Order, based on the hearing, in writing, delivered to the appellant by first-class mail.

**7. Buildings Declared ~~Substandard or Derelict or~~ Substandard.** When a building or structure, or any aspect of a building or structure, is [Substandard or Derelict or Substandard by the definitions set forth in Section 2.01.050, Table B, Table C, and Table D of this chapter, those aspects which were declared Derelict and Substandard](#) it shall be repaired to the minimum building requirements set forth in Section 2.01.070, and the minimum standards of repair set forth in Section 2.01.080 of this chapter, ~~as directed by the Building Official.~~

**8. Alternate Procedures.** Where Derelict Building Proceedings undertaken against a property have extended over a period of time to where it is necessary to file a Certificate of Complaint with the Pierce County Auditor, the Building Official may undertake one of the two following procedures to mitigate the Derelict Status of the Building:

a. Procure the Property through Eminent Domain: Where the property undergoing the Derelict Building Procedure is of sufficient value to be repairable, the Building Official may obtain the property through eminent domain, pursuant to the provisions of the Revised Code of Washington (RCW) 35.80A.

b. ~~Start Commence~~ Dangerous Building Proceedings: Where the property undergoing the Derelict Building Procedure is in a state where it is more economical to demolish the building(s) on the property, the Building Official may initiate Dangerous Building Proceedings pursuant to Tacoma Municipal Code 2.01.060, ~~G~~ and Table E of this chapter.

**~~G. Dangerous Buildings or Structures Procedures.~~**

1. General. This section shall apply to all buildings, structures, and properties, residential or commercial, which have been evaluated as being Dangerous Buildings and Structures in that the building or structure contains one or more violations listed in Table E, Dangerous Buildings or Structures. ~~Dangerous Buildings or Structures, by definition, are unfit for human occupancy, are potentially dangerous to life and limb, and/or are in a condition where it is unfeasible~~ [infeasible to repair.](#)

2. Posting and Placement of Utility Restraint. Dangerous buildings or structures shall be posted “MUST NOT BE OCCUPIED.” See Subsection H, Posting of Buildings. Simultaneously, utility restraints shall be placed on such buildings or structures. See Subsection I, Utility Restraints.

Buildings, which are posted, shall not be occupied for any purpose until repaired to eliminate the violations listed in the Notice of Violation, to the satisfaction of the Building Official. In addition, the building shall only be authorized to be entered for preparing a ~~time schedule and a~~ repair plan [and to schedule to](#) be submitted to the Department of Public Works for approval. Upon approval of the ~~time schedule and~~ repair plan [and schedule](#), the owner or his or her representatives will be authorized to enter the building to effect repairs. No other entry or occupancy of the building shall be permitted until the repairs are completed and approved by the Building Official.

3. Owner Notification. The owner shall be notified that the building, structure, or property has been found to be in violation of this chapter and is dangerous. ~~The~~ owner ~~shall~~ [may](#) be given 10 calendar days from the date of the notice to secure the building, in accordance with Section 2.01.090, Unoccupied or Vacant Building Standards. The notice shall include the standards for securing a vacant building. The owner shall be given ~~30-21~~ calendar days from the date of the notice to respond to the Building Official to negotiate a [repair plan and schedule of action.](#)

4. EXCEPTION: Where there is an imminent danger to life or property, the building can be secured by the order of the Building Official, Police Chief, Fire Chief, or Director of the Tacoma-Pierce County Health Department, and the cost assessed to the owner in accordance with the provisions of RCW 35.80.030(h).

The response to the City shall be a ~~written~~ plan for repairing or demolishing the building. The ~~written~~ response shall include a schedule, ~~jointly~~ agreed upon by the owner and the City, for the repair or demolition of the building or structure. The schedule shall include:

a. Time for ~~developing and~~ submitting acceptable construction plans, specifications, and calculations [when required](#) for the repair or demolition of the building or structure.

b. Time for ~~actually~~ repairing or demolishing the building or structure once a building permit has been issued. ~~Such time line may shall include intermediate progress goals, as appropriate.~~

Once acceptable construction plans, specifications, and calculations for the repair or demolition of the building

or structure have been submitted to the City and have been approved for permit, the permit shall be obtained within ~~14~~7 calendar days of notification that the permit is ready. ~~The work authorized by the permit shall proceed according to the schedule jointly agreed upon by the owner and the City. Such schedule shall comply with the Building Code provisions governing the expiration of permits.~~

#### 5. EXCEPTIONS:

a. The Building Official may agree for sufficient reason to accept an alternate time schedule for the repair or demolition of the building.

b. The Building Official may grant extensions to the time schedule for sufficient reasons, on written request. Such requests must be filed with the Building Official prior to the deadlines set for the completion of the construction.

6. Dangerous Building Complaint to be Initiated. In ~~the~~ event of any of the following, the City ~~shall may~~ prepare a Dangerous Building Complaint against the building and property, in accordance with Subsection 7, Contents of Dangerous Building Complaints, and schedule a hearing in accordance with Subsection 8, Hearing Procedures:

a. There is no response from the owner to the notification.

~~b. The response to the notification by the owner is negative.~~

~~eb.~~ An agreement ~~by the owner and the City~~ cannot be reached in respect to the extent of the repairs of the building or the time schedule for the repair or demolition of the building.

~~ec.~~ The owner defaults on the time schedule for obtaining the necessary permits and beginning construction or demolition.

~~ed.~~ The owner, once having started construction or demolition, does not ~~substantially~~ adhere to the agreed-upon schedule, or abandons the construction or demolition.

Once the building, structure, and property violations have been corrected to the satisfaction of the Building Official, the case shall be closed and, if appropriate, a final report relative to the action placed in the City's files, and any ~~Certificates of Complaint, Dangerous Building Complaints, or Findings of Fact and Order or general tax liens~~ filed with the Pierce County Auditor against the title of the property shall be removed by the City on payment of any assessed penalties and any costs incurred by the City for securing the property ~~or processing the Dangerous Building Action.~~

**7. Contents of Dangerous Building Complaints.** The complaint issued by the Building Official must be in writing and shall be posted on the property and sent by first-class mail and by certified mail, return receipt requested, to all persons having any interest in and to the property, as shown by the records of the Pierce County Auditor, of any building or structure found by the Building Official to be a Dangerous Building within the definition set forth in Section 2.01.050, and Table E, Dangerous Buildings or Structures; provided, that if the whereabouts of any of such persons is unknown and the same cannot be ascertained by the Building Official in the exercise of reasonable diligence, and the Building Official makes an affidavit to that effect, the serving of such complaint upon such persons may be made by sending a copy of the notice by first-class mail and by certified mail, return receipt requested, to each ~~such~~ person at the address of the taxpayer of the property as shown on the last equalized tax assessment roll of Pierce County. If the address of the building involved in the proceeding is different from the address of the taxpayer listed on the tax assessment roll, and the whereabouts of any person in interest is unknown, then a copy of the complaint shall also be mailed by first-class mail and certified mail, return receipt requested, to such person or persons. The complaint shall contain, among other things, the following information:

a. Name of the owner and ~~or~~ other interested persons, as provided herein above.

b. Street address and legal description of the property on which said building is located.

c. General description of type of building, wall, or structure deemed ~~unsafe or substandard~~ dangerous.

d. A complete itemized statement or list of particulars which caused the building, wall, or structure to be a Dangerous Building, as defined in Section 2.01.050, and Table E, Dangerous Buildings or Structures.

~~Whether or not~~ That said building should be vacated by its occupants, ~~and the date of such vacation.~~

f. Whether or not the statement or list of particulars, as provided for in Subsection 7.d above, can be removed or repaired.

g. Whether or not the building constitutes a fire ~~menace~~ hazard.

h. Whether it is reasonable to repair the building or whether the building should be demolished.

i. If the building is a City landmark or is within a Historic Special Review or Conservation District ~~or the Historic Landmark Registry or is in a Historic District~~, the complaint shall provide the procedural

requirements of the Landmarks Preservation Commission for repair or demolition.

j. A notice that a hearing shall be held before the Hearing Officer in the City Council Chambers in the Tacoma Municipal Building, not less than 10 days nor more than 30 days after the ~~servicing mailing~~ of such complaint on all interested parties, as recorded by the Pierce County Auditor, and posting, and that all parties in interest shall be given the right to file an answer to the complaint, to appear in person or otherwise, and to give testimony at the time of the hearing.

k. That a copy of such complaint shall also be filed with the Pierce County Auditor, which filing shall have the same force and effect as other lis pendens notices provided by law.

~~The filing of a complaint is the same as filing a Certificate of Complaint.~~

**8. Hearing Procedures.**

a. The Hearing Officer shall convene the hearing at the time specified in the Dangerous Building complaint ~~or as soon thereafter~~. The City shall present its case through the City Attorney, or his or her assistant, who shall be authorized to call witnesses and conduct cross-examinations. The building or property owner, or his or her legal representative, ~~shall may~~ present his or her case and is authorized to present witnesses and conduct cross-examinations. The agenda for the hearing shall essentially be according to the following:

1. Hearing Officer calls the hearing to order.
2. Introductions of the Hearing Officer, plaintiffs, defendants, and other parties of interest.
3. City Attorney presents the City's case.
4. Defendant presents his or her case.
5. City provides rebuttal.
6. Defendant provides rebuttal.
7. Hearing Officer presents final comments and adjourns hearing.

b. The Hearing Officer shall issue a Findings of Fact and Order. The Findings of Fact and Order shall contain the following:

1. Name of owner or other interested parties, as listed by the Pierce County Auditor.
2. Street address and legal description of the property on which the building is located.
3. General description of type of building, wall, or structure deemed dangerous, ~~or substandard~~.

4. A complete itemized statement or list of particulars which caused the building, wall, or structure to be a Dangerous Building, as defined in Section 2.01.050 and Table E, Dangerous Buildings or Structures.

~~5. Whether or not the building is vacant, and the date of such vacation, if known.~~

~~56.~~ Whether or not the statement or list of particulars, as provided for in paragraph 4.d above, can be removed or repaired.

~~67.~~ Whether or not the building constitutes a fire ~~menace~~ hazard.

~~78.~~ Whether it is reasonable to repair the building or structure or whether the building or structure should be demolished.

~~78.~~ A statement that ~~t~~The City of Tacoma has incurred costs in processing the Dangerous Building Abatement action and that: Pursuant to RCW 35.80.030(1)(h), ~~a~~All costs incurred by the City for this purpose, including demolition, if necessary, shall be assessed against the property and shall be collected thereafter by the County Treasurer as a part of the general taxes, and remitted to the City. This assessment shall constitute a lien against the real property of equal rank with State, County and Municipal taxes.

~~899.~~ Whether the building is a City landmark or is within a Historic Special Review or Conservation District ~~on the Historic Register or within a Historically Designated Area~~, and the procedures required by the Landmarks ~~Historic~~ Preservation Commission.

The Order shall provide specific instructions on whether the building or structure is to be demolished or repaired, and a time frame for doing so. In the event the building is a City landmark or is within a Historic Special Review or Conservation District ~~on the Historic Register or is within a Historically Designated Area~~, the time schedule shall ~~include as much as possible take into account~~ Landmarks Preservation Commission procedures defined in Chapter 13.05.045 of the Tacoma Municipal Code, unless an emergency condition has been declared by the Building Official. ~~In the event the building is to be repaired, specific direction shall be provided as to the extent of repairs necessary to remove the violations listed against the building or structure.~~ In addition, a building, structure, or property that is declared dangerous ~~shall may be~~ required to comply with the requirements set forth in Subsection ~~4213~~, Buildings Declared Dangerous. ~~There may be reason to negotiate repairs due to the historic significance of the property.~~

EXCEPTION:

Form

Form

If a building is a City landmark or located within a Historic Special Review or Conservation District, or is determined to be a historic resource by the Landmarks Preservation Commission or Historic Preservation Office, the repair requirements may be waived by the Building Official.

9. A requirement that the property shall be nuisance free at all times.

~~1010. Appeals to the Board of Building Appeals. The Findings of Fact and Order shall also state that appeal of the Findings of Fact and Order issued by the Hearing Officer shall be made to the Board of Building Appeals, as established and governed by Chapter 2.17 of the Tacoma Municipal Code. Appeals shall be filed within 30 calendar days of receipt of the Findings of Fact and Order.~~

11. The property shall be nuisance free at all times.

The Findings of Fact and Order shall be sent to all interested parties, as listed by the Pierce County Auditor as having interest in the property, by both first class mail, and by certified mail, return receipt requested.

~~In the event that an appeal is filed to the Board of Building Appeals, a hearing shall be scheduled and all interested parties shall be notified by first class mail and by certified mail, return receipt requested. The Board of Building Appeals shall hold the hearing no sooner than 10 calendar days from the date of the filing of the appeal in accordance with the rules established by Chapter 2.17 of the Tacoma Municipal Code, and shall follow the same agenda used for the hearing held by the Hearing Officer.~~

~~The Board of Building Appeals shall make a recommendation based on the hearing within 50 calendar days of the filing of the appeal to the Hearing Officer, who shall issue a new Findings of Fact and Order based on the Board of Building Appeals recommendation, and shall so notify the appellant using the same procedure for notification as used for the original Findings of Fact and Order, within 60 calendar days of the filing of the appeal.~~

~~1112. Appeals of Findings of Fact and Order Based on Recommendation of Board of Building Appeals. The new Findings of Fact and Order shall state that an appeal of the Findings of Fact and Order issued by the Hearings Officer, based on the recommendation of the Board of Building Appeals, shall be made directly to Pierce County Superior Court within 30 calendar days of the date of the Findings of Fact and Order. Such appeal shall be de novo.~~

~~121013. Whether the building should be repaired or demolished. Buildings Declared Dangerous. When it~~

~~is determined in a hearing, convened in accordance with the provisions of Subsection 8 above, Hearing Procedures, that a building or structure, or any aspect of a building or structure, is dangerous by the definition set forth in Section 2.01.050 and Table E, Dangerous Buildings or Structures, of this chapter, such building or structure shall mayshall be:~~

EXCEPTION:

Buildings that are on the local, State or Federal Historic Register or are within a Historically Designated Area may be exempt from the provisions of this section in order to maintain their historic character. It shall be the responsibility of the property owner to preserve the historic significance of the building within all feasible means. Demolition of historic buildings shall be avoided and if there are no other means to salvage the building, the demolition of the building shall be approved by the Tacoma Landmarks Commission. All waivers of the requirements for the repair of the building shall be approved by the Building Official.

a. Demolished, or

b. Those aspects which were declared dangerous ~~in the hearing~~ shall be repaired to the minimum building requirements set forth in Section 2.01.070 of this chapter, ~~as directed by the Hearing Officer~~, and the following items shall be complied with whether or not they are addressed in the Dangerous Building Complaint:

1. Exiting facilities, including doors, corridors, stairs, exit enclosures, and smoke-proof enclosures, shall be brought into full compliance with the Building Code. Stairways with risers not exceeding 7-1/2 inches in height, and treads not less than 10 inches in depth, which are in good condition and otherwise meet the Building Code's requirements, do not have to be rebuilt.
2. The fire resistance of all building elements, in regard to the required type of construction, shall be brought into full compliance with the Building Code; provided that, in buildings which have full sprinkler systems, the outside fire-resistive membrane on exterior walls may not be required.
3. If required by the Building Code, automatic fire sprinkler systems shall be installed.
4. If required by the Building Code or by the Fire Code, as adopted and amended by the City of Tacoma, fire alarm systems shall be installed and shall meet all requirements of the Building Code and the Fire Code, as adopted by the City of Tacoma.

5. The building shall be brought into structural compliance with the Building Code, except that the building shall be considered as complying with the seismic structural requirements if it can withstand the forces specified by the [Uniform Code for Building Conservation IEBC](#), as adopted and amended in the Building Code in Chapter 2.02 of the Tacoma Municipal Code.

6. The building shall be brought into compliance with provisions of the [building code related to accessibility Washington State Barrier Free Code](#) for new construction.

7. The building shall be brought into compliance with the Washington State Energy Code.

EXCEPTION: Exterior stud frame walls need only be provided with insulation which can be accommodated by the stud depth of the wall.

~~If the Hearing Officer declares a building dangerous, he/she shall make a recommendation on whether the building should be demolished or repaired.~~

~~11. The recommendation to repair or demolish shall be based on the estimated costs of repair in relation to the existing value of the building, as determined by the Pierce County Assessor. The Pierce County Assessor shall be requested to make an assessment of the value of the building specifically for the dangerous building action. If the cost of repairs exceeds 50 percent of the assessed value of the building, the Hearing Officer shall mayshall recommend that the building be demolished.~~

**EXCEPTION:**

~~If a building is a City landmark or located within a Historic Special Review or Conservation District, or is determined to be a historic resource by the Landmarks Preservation Commission or Historic Preservation Office, the preceding code conditions may be waived by the Building Official.~~

~~12. Appeals to the Board of Building Appeals. The Findings of Fact and Order shall also state that appeal of the Findings of Fact and Order issued by the Hearing Officer shall be made to the Board of Building Appeals, as established and governed by Chapter 2.17 of the Tacoma Municipal Code. Appeals shall be filed within 30 calendar days from the date of the Findings of Fact and Order. Any appeal of the Findings and Order shall be governed by Chapter 2.17.~~

~~13. The Findings of Fact and Order shall be sent to all interested parties, as listed by the Pierce County Auditor as having interest in the property, by both first-class mail, and by certified mail, return receipt requested.~~

**H. Posting of Buildings.**

If a building is determined to be in violation of this chapter to an extent that it fails to provide the amenities which are essential to decent living or the building is unsafe, unsanitary, or structurally unsound, the building shall be posted for non-occupancy.

The notice posted on the building shall identify the location of the building by street address, the date on which the building was posted, the signatures of the Building Official and the inspector who posted the notice onto the building, and a telephone number and street address where the inspector can be contacted. The notice shall also state the violation and penalties for removal of the notice from the building.

The notice posted on the building shall state that the building "MUST NOT BE OCCUPIED" and shall be affixed to ~~all doors, if accessible, or a minimum of being posted on~~ the main door facing the address street ~~or any other accessible doors if needed~~. The "MUST NOT BE OCCUPIED" portion of the notice shall be of letters of sufficient size to be read from the public way.

**I. Utility Restraints.**

When a building is determined as being in violation of this chapter and is unfit for human occupancy, a utility restraint may be placed against the property by the Building Official, restraining the utility providers from providing utilities to the building. Dangerous buildings or structures and derelict buildings or structures, which are not occupiable and are posted "MUST NOT BE OCCUPIED," ~~shall may~~ have utility restraints placed on them. The utility restraint shall be recorded with the Tacoma Public Utilities Department or other utility providers. The utility restraint shall not be released until the building is repaired or demolished. Once the building has been repaired or demolished, the Building Official shall record with the Tacoma Public Utilities Department, or other utility providers, a written release granting utility service to the building or property. The utility restraint shall not interfere with any Code enforcement action taken by the Tacoma Public Utilities Department or other utility providers.

EXCEPTION: Limited utilities may be permitted to be supplied to the property for facilitating the repairs, at the discretion of the Building Official.

**J. Emergency Cases.**

Where, in the opinion of the Building Official, it appears there is an imminent danger to the life or safety of any person occupying or being admitted to a building or structure, the Building Official shall cause the immediate vacation of the building, in whole or in

part, as is necessary, to mitigate the danger to life. The Building Official shall also order the barricading of public ~~sidewalks, streets, or alleys~~ right-of-way as necessary to protect the public, and shall secure the building from unauthorized entry, and cause the immediate bracing or repair of the building as necessary to protect the public, or, if that is not possible, to have the building or structure demolished. For buildings that are City landmarks, located within a Historic Special Review or Conservation District, or are identified as “historic resources” per Chapter 13.05 of the Tacoma Municipal Code, the Historic Preservation Officer shall actively pursue feasible intermediate alternatives to total demolition that will remediate emergency condition and/or retain the building or its historic features. If an alternative to demolition is identified, then it may be pursued as the preferred action. The costs of such emergency vacation, bracing, repair, or demolition of such building or structure shall be assessed to the owner in accordance with the provisions of RCW-35.80.030(h).

**K. Permits.**

No person, firm, or corporation shall erect, construct, enlarge, alter, repair, move, improve, remove, convert, or demolish any building or structure, or cause or permit the same to be done, without first obtaining all permits required by the Tacoma Municipal Code and the laws of the State of Washington. The owner or their agent is required to obtain all permits as required by the codes prior to at the time the work is being performed. The time frame of the permits may be conditioned in accordance with the time frames agreed upon in the negotiated repair schedule.

**L. Duties of the City Attorney.**

The City Attorney, or his or her assistant, shall:

1. Prosecute all persons failing to comply with the terms of the notices provided for and/or the order provided for in Section 2.01.060.
2. Represent the City of Tacoma at hearings before the Hearing Examiner in regard to appeals filed relative to

~~decisions administrative reviews issued by the Building Official pertaining to Substandard and Derelict Buildings.~~

~~3. Represent the City of Tacoma at hearings before the Hearing Examiner in regard to appeals filed to the Finding of Fact and Order issued by the Building Official pertaining to Derelict Buildings.~~

~~43. Represent the City of Tacoma at hearings before the Board of Building Appeals in regard to appeals filed to the Finding of Fact and Order issued by the Building Official pertaining to Dangerous Buildings.~~

~~54. Represent the City of Tacoma at hearings before superior court in regard to appeals filed to the Finding of Fact and Order issued by the Hearing Examiner pertaining to Substandard and Derelict Buildings.~~

~~6. Represent the City of Tacoma at hearings before superior court in regard to appeals filed to the Finding of Fact and Order issued by the Hearing Examiner pertaining to Derelict Buildings.~~

~~75. Represent the City of Tacoma at hearings before superior court in regard to appeals filed to the Finding of Fact and Order issued by the Building Official Hearings Officer, based on the recommendation of the Board of Building Appeals pertaining to Dangerous Buildings.~~

~~86. Bring suit to collect costs incurred by the City of Tacoma in repairing or causing to be vacated or demolished the Dangerous Buildings.~~

**ML. Severability.**

If any section, subsection, sentence, clause, phrase, or portion of this chapter is for any reason held invalid or unconstitutional by any court of competent jurisdiction, such portion shall be deemed a distinct and independent provision, and such holdings shall not affect the validity of the remaining portions hereof.

**TABLES:**

TABLE A

**POINT LIMITS**

Number of Points	Abatement Category/Process
24 or Less	Standard Property
25 to 49	Non-standard property warning
50 or More	Substandard Property

**TABLE B**  
**SUBSTANDARD PROPERTY**  
**EXTERIOR PROPERTY VIOLATIONS**

Item No.	Violation	Maximum Points
1	Unightly or Overgrown Ground Cover, Trees, or Shrubbery	5
2	Garbage/Junk/Debris in Yard	15
3	Abandoned or Inoperable Vehicles in Yard	15
4	Graffiti on Buildings, Fences, or Other Structures	25
5	Missing or Unreadable Address Numbers or Apartment Numbers	10
6	Exterior Stairways (In Yards) Need Repair or Replacement	15
7	Exterior Stairways (In Yards) Need Handrails/Guardrails	10
8	Exterior Sidewalks, <a href="#">or other paved areas</a> , broken, buckled, or deteriorated	15
9	Retaining Wall Needs Repairing or Replacing	10
10	Broken or Plugged Sewer	25

**EXTERIOR BUILDING VIOLATIONS**

Item No.	Violation	Maximum Points
11	Accessory Structure Needs to be Repaired or Demolished	25
12	Accessory Structures Need Painting	5
13	Chimney(s) Needs to be Repaired or Removed	15
14	Roofing Needs Repair	10
15	Roofing Needs Replacing	15
16	Gutters Need to be Repaired or Replaced	5
17	Exterior Walls Need to be Repaired	15
18	Exterior Walls Need Siding Repaired	10
19	Foundations Need Repair	10
20	Foundations Need Replacing	15
21	Porch, Deck, or Balcony Needs to be Repaired, Replaced or Removed	15
22	Porch, Deck, or Balcony Needs Guardrail	15
23	Porch, Deck, or Balcony Needs Guardrail Repaired/Replaced	10
24	Overhangs or Cornices Need Repairing or Replacing	15
25	Window Glass Needs Replacement	10
26	Window Frames Need Repair or Replacement	15
27	Exterior Doors and/or Door Framework Needs to be Repaired or Replaced	10
28	Peeling or absence of paint or weather protection on exterior walls, decks, stairs, porches, and other exterior surfaces	5
29	Improper Use of Recreational Vehicles	50
30	Improper placement or use of cargo containers	50
31	Use of Semi-Trailers for storage	50
<a href="#">32</a>	<a href="#">Exterior u</a> <del>n</del> <a href="#">permitted or non-compliant work</a>	<a href="#">50</a>

**INTERIOR VIOLATIONS**

Item No.	Violation	Maximum Points
<a href="#">3233</a>	Inadequate Number of Electrical Convenience Outlets	10
<a href="#">3334</a>	Electrical Convenience Outlets or Switches do not have Device Plates	5
<a href="#">3435</a>	Improper water closets, lavatories, bathtubs, showers, or other plumbing fixtures	15

<a href="#">3536</a>	Insufficient number of water closets, lavatories, bathtubs, showers or other plumbing fixtures as required by the size or occupant load of the occupancy	10
<a href="#">3637</a>	All lavatories, sinks, bathtubs or similar fixtures where the spigot outlet is below the level of the basin rim, and any other fixtures where cross-connection or back-siphonage is possible	25
<a href="#">3738</a>	Substandard Kitchen	15
<a href="#">3839</a>	Substandard Laundry	15
<a href="#">3940</a>	Plumbing piping or fixtures of non-approved materials	10
<a href="#">4041</a>	Leaking Plumbing Piping (Supply and/or Waste)	15
<a href="#">4142</a>	Sagging or Improperly Supported Piping	5
<a href="#">4243</a>	Clogged or Inoperative Plumbing Piping	15
<a href="#">4344</a>	Appliances, including solid-fuel-burning appliances, which have been installed without proper clearances to combustible materials	25
<a href="#">4445</a>	Unlisted appliances which have been illegally installed	25
<a href="#">4546</a>	Improper Gas Piping	15
<a href="#">4647</a>	Missing Temperature/Pressure Relief Valve on Water Heater	25
<a href="#">4748</a>	Inadequate, <a href="#">inoperable</a> or deteriorated heating, <del>or</del> <a href="#">mechanical equipment or elevator equipment</a>	<a href="#">2550</a>
<a href="#">4849</a>	Inadequate Supply of Combustion Air for Fuel Fired Equipment	15
<a href="#">4950</a>	Window Locks Missing or Inoperative	15
<a href="#">5051</a>	Door Locks Missing, Inoperative, or Illegal	15
<a href="#">5152</a>	Interior Doors Need Repair	5
<a href="#">5253</a>	Weather Stripping of Doors and/or Windows Missing or Needs Repair	5
<a href="#">5354</a>	Deteriorated brick, concrete, or stone masonry, or detached veneer	15
<a href="#">5455</a>	Deteriorated wood building materials due to inadequate wood to earth clearance	10
<a href="#">5556</a>	Deteriorated or crumbling plaster or gypsum board	10
<a href="#">5657</a>	Flaking, scaling, or peeling of wallpaper, paint, or other interior wall coverings	10
<a href="#">5758</a>	Infestations of Vermin (See Definitions)	25
<a href="#">5859</a>	No Windows or Inadequate Window Area to Provide Natural Light	15
<a href="#">5960</a>	Inadequate or no ventilation (either natural or mechanical ventilation)	15
<a href="#">6061</a>	Room and space dimensions less than required by this chapter	15
<a href="#">6162</a>	Dampness, mold and/or mildew within the building	10
<a href="#">6263</a>	Lack of or inadequate garbage and rubbish storage and disposal	10
<a href="#">6364</a>	Exit Signs are not Provided With Two Sources of Power	25
<a href="#">6465</a>	Exit Path Lighting is not Provided With Two Sources of Power	25
<a href="#">6566</a>	Exit Stairs have Incorrect Rise and Run	25
<a href="#">6667</a>	Access to Electrical Panels is Inadequate	15
<a href="#">6768</a>	Floor Surfacing Needs Repair	25
<a href="#">6869</a>	Floor Framing Needs Repair	25
<a href="#">6970</a>	Wall Surfacing Needs Repair	15
<a href="#">7071</a>	Wall Framing Needs Repair	15
<a href="#">7172</a>	Ceiling Surfacing Needs Repair	15
<a href="#">7273</a>	Ceiling and/or Roof Framing Needs Repair	15

<del>7374</del>	<b>Overcrowding:</b> Any building or portion thereof, where the exiting is insufficient in number, width, or access for the occupant load served, or where the number of occupants in sleeping rooms exceeds the number permitted by the area of the sleeping room	25
<del>75</del>	<b><u>Interior unpermitted or non-compliant work</u></b>	<u>50</u>

**UNOCCUPIED OR VACANT BUILDING STANDARDS VIOLATIONS**

Item No.	Violation	Maximum Points
<del>747576</del>	Exterior Openings are not properly secured in accordance with Section 2.01.090	50
<del>75767</del>	Weather protection is not adequate to prevent deterioration of the building	50
<del>76787</del>	There is debris within the building or on the premises, which creates a fire-hazard or a nuisance	50
<del>77798</del>	Fire alarms or Fire Sprinkler Systems are inoperable	50
<del>787980</del>	Adequate heat is not provided to protect the sprinkler system from freezing	50
<del>79810</del>	Sewer lines are not capped	50
<del>80824</del>	The owner does not inspect the property and keep the property from looking uncared for	50
<u>83</u>	<u>The owner does not repair door(s), window(s), exterior wall(s), or other areas of the building which have been damaged, thereby exposing the building to unauthorized third-party entry or inclement weather</u>	<u>50</u>

**TABLE C  
FIRE AND LIFE SAFETY HAZARDS**

Item No.	Violation	Maximum Points
1	Exit Doors Have Improper Hardware	15
2	Required Corridors Are Not of One-Hour Construction	50
3	Corridor Doors Are Not Properly Rated (or Equivalent)	50
4	Corridor Doors Don't Have Closers	50
5	Corridor Doors Have Improper Hold Open Devices	25
6	Corridor Doors Don't Have Gasketting	25
7	Corridor Door Frames Need to be Repaired or Replaced	50
8	Transoms Above Corridor Doors are not Sealed or Fire-Rated	50
9	Exit Paths Are Not Properly Illuminated	50
10	Required Exit Signs are Missing	50
11	Required Exit Signs are not Illuminated	50
12	Exit Stairs Need to be Repaired or Replaced	50
13	Exit Stairs Need to be Provided With Handrails/Guardrails, or Handrails/Guardrails Need Repair or Replacement	50
14	Exit Stairs Are Missing or Have Improper Landings	50
15	Stair Width is Too Narrow	25
16	Stairs Need to be Enclosed in a Fire Rated Shaft	50
17	Stair Enclosures are not of the Proper Fire Rating	50
18	Doors to Stair Enclosure are Missing or are Blocked Open	50
19	Doors to Stair Enclosures Do Not Meet Required Fire Assembly Requirements, or Fire Assembly Needs Replacement or Repair	50
20	Exit Windows From Sleeping Rooms not Provided	50

21	Exit Windows From Sleeping Room Too Small in Area or Dimension	50
22	Exit Windows From Sleeping Room Have Too High a Sill Height	50
23	Improper or Hazardous Wiring	50
24	Missing or Inoperative Unit Smoke Detectors	50
25	Missing or Inoperative Fire Extinguishers	50
26	Improper Storage, Building Clutter, or other Fire Hazards	25
27	Required Fire Sprinkler System Inoperative or Missing	50
28	Fire Resistive Occupancy Separation or Area Separation Walls need to be repaired or replaced	25
29	Fire resistive construction needs repair or replacement	25
30	Lack of, inoperable, or inadequate fire alarm system	50

**TABLE D**  
**DERELICT BUILDINGS OR STRUCTURES**

Item No.	Violation
1	<p><b>Interior Environment Violations</b>, which shall include, but not be limited to, the following, if required specifically by the occupancy classification for the use of the building:</p> <ul style="list-style-type: none"> <li>a. Lack of, or inadequate ventilation.</li> <li>b. Infestation by insects, vermin, or rodents.</li> </ul>
2	<p><b>Structural Hazards</b>, Structural hazards which constitute a danger to life and limb, but are of limited extent, and are repairable. These shall include, but not be limited to, the following:</p> <ul style="list-style-type: none"> <li>a. Cracked or crumbling concrete or masonry foundation walls, footings, or posts, or deteriorated or rotting wood foundations or wood posts.</li> <li>b. Flooring or floor supports which are defective, deteriorated, or of insufficient size to carry imposed loads with safety.</li> <li>c. Members of walls, partitions, or other vertical supports that split, lean, list, or buckle due to defective materials or deterioration, or are of insufficient size to carry imposed loads with safety.</li> <li>d. Members or supports of ceilings and roofs, or other horizontal members which sag, split, or buckle due to defective material or deterioration, or are of insufficient size to carry imposed loads with safety.</li> <li>e. Fireplaces or chimneys which list, bulge, or settle due to defective materials or deterioration, or are of insufficient size or strength to carry imposed loads with safety.</li> <li>f. Exterior cantilever walls or parapets, appendages attached to or supported on the exterior of a building located adjacent to a public way or other space used by pedestrians which are not constructed, anchored, and braced to be able to withstand earthquake forces.</li> <li>g. Exterior walls located adjacent to a public way or other space used by pedestrians, which are not constructed, anchored, and braced to be able to withstand earthquake forces.</li> </ul>
3	<p><b>Hazardous or inadequate wiring</b> which presents an immediate danger to life or limb:</p> <ul style="list-style-type: none"> <li>a. Wiring which is inadequately sized for the presently imposed electrical loads.</li> <li>b. Wiring where, due to improper ground, lack of insulation, or other conditions, short circuits can occur.</li> <li>c. Damaged, missing, or insufficient electrical convenience outlets, electrical components, or equipment.</li> </ul>
4	<p><b>Hazardous or inadequate plumbing</b> which present a hazard to health, or do not provide minimum acceptable amenities for occupancy:</p> <ul style="list-style-type: none"> <li>a. Lack of, or inoperable water closets, lavatories, bathtubs, showers, or other plumbing fixtures as required for the occupancy.</li> <li>b. Lack of hot and/or cold running water to plumbing fixtures.</li> <li>c. Lack of, or inadequate water heating facilities.</li> <li>d. Plumbing piping and fixtures improperly installed.</li> <li>e. Plumbing piping and connections which leak, are plugged, or otherwise are inoperative.</li> <li>f. Plumbing fixtures which are not properly connected to the waste and vent system, or which are cracked, inoperative, or leak.</li> <li>g. Lack of or inadequate sewage disposal/or connection of plumbing fixtures thereto.</li> </ul>
5	<p><b>Hazardous mechanical equipment</b> which present a hazard to health, life, or limb, or do not provide minimum acceptable amenities for occupancy:</p> <ul style="list-style-type: none"> <li>a. Lack of or inadequate heating facilities.</li> <li>b. Mechanical equipment with undersized vents or chimneys.</li> <li>c. Fuel-fired equipment with insufficient combustion air.</li> <li>d. Mechanical equipment which, because of lack of maintenance or improper installation, constitutes a fire hazard.</li> </ul>

6	<b>Faulty Weather Protection:</b> Indications of which shall include, but not be limited to, the following: a. Holes, including broken windows or doors; breaks; cracked, loose, or rotted boards or timbers; and any other conditions in exterior walls and weather-exposed exterior surfaces or attachments which might admit rain or dampness to the interior portions of the walls or occupied spaces of the building. b. Deteriorated or missing roof covering material and flashing. c. Standing water in crawl spaces or basements. d. Deteriorated or rotted stairs, porches, balconies, or decks.
7	<b>Fire Hazard:</b> Any conditions which, in the opinion of the Fire Chief, constitute a distinct hazard to life or property.
8	<b>Faulty Materials or Construction:</b> Faulty materials are defined as all materials not specifically allowed or approved by the Building Code in effect at the time of construction, or this chapter. Faulty materials also include approved materials which are used improperly. Faulty Construction is defined as materials assembled using improper or substandard workmanship.
9	<b>Hazardous or Unsanitary Premises:</b> Those premises on which an accumulation of weeds, vegetation, junk, dead organic matter, debris, garbage, offal, rat harborages, stagnant water, combustible materials, and similar materials or condition which constitute fire, health, or safety hazards.
10	<b>Inadequate Exits:</b> All buildings or portions thereof not provided with exit facilities as required by the Building Code, except those buildings or portions thereof whose exit facilities are safe and conformed with all applicable laws at the time of their construction.
11	<b>Inadequate Fire-Protection or Fire-Fighting Equipment:</b> All buildings or portions thereof which are not provided with fire-resistive construction, fire extinguishing systems, or smoke detection equipment as required by the Tacoma Municipal Code.
12	<b>Improper Occupancy:</b> Buildings or portions thereof, where the use or character of its occupancy has changed from the original approved design or intended use, without a recorded action reviewed by the Building Official.

**TABLE E  
DANGEROUS BUILDINGS OR STRUCTURES**

<b>Item No.</b>	<b>Violation</b>
1	Whenever any door, aisle, passageway, stairway, or other means of exit is not of sufficient width or size, or is not arranged as to provide safe and adequate means of exit in case of fire or panic.
2	Whenever the walking surface of any aisle, passageway, stairway, or other means of exit is racked, warped, buckled, settled, worn, loose, torn, or otherwise is in such condition as to not provide safe and adequate means of exit in case of fire or panic.
3	Whenever any portion thereof has been damaged by fire, earthquake, wind, flood, or by any other cause to such an extent that the structural strength or stability thereof is materially less than it was before such catastrophe and is less than the minimum requirements of the Building Code in effect at the time the building was constructed.
4	Whenever any portion, member, or appurtenance thereof is likely to fail, become detached, dislodged, or collapse and thereby injure persons or damage property.
5	Whenever any portion of a building, any member, appurtenance, or ornamentation on the exterior thereof has deteriorated, or been damaged so as to be no longer capable of withstanding wind pressures or seismic forces specified in the Building Code in effect at the time the building was constructed.
6	Whenever any portion thereof has wracked, warped, buckled, or settled to such an extent that walls or other structural portions have materially less resistance to winds or earthquakes than is required in the case of similar new construction.

7	Whenever the building or structure, or any portion thereof, is likely to partially or completely collapse because of: (i) dilapidation, deterioration, or decay; (ii) faulty construction; (iii) removal, movement, or instability of any portion of the ground necessary for the purpose of supporting such building; (iv) deterioration, decay, or inadequacy of its foundation; or (v) any other cause.
8	Whenever, for any reason, the building or structure, or any portion thereof, is unsafe for the purpose for which it is being used.
9	Whenever the exterior walls or other vertical structural members list, lean, or buckle to such an extent that a plumb line passing through the center of gravity does not fall inside the middle one-third of the base.
10	Whenever the building or structure, exclusive of the foundation, shows 33 percent or more damage or deterioration of a supporting member or members, or 50 percent damage or deterioration of non-supporting members, including wall coverings.
11	Whenever the building or structure has been so damaged by fire, wind, earthquake, flood, or other causes, or has become so dilapidated or deteriorated as to become (i) an attractive nuisance to children; (ii) a harbor for transients or vandals; or (iii) a place for performing criminal or unlawful activities.
12	Whenever any building or structure has been constructed, exists, or is maintained in violation of any specific requirement or prohibition applicable to such building or structure provided by the building regulations of this jurisdiction, as specified in the Building Code or this chapter, or of any law or ordinance of this state or jurisdiction relating to the condition, location, or structure of buildings.
13	Whenever any building or structure which, whether or not erected in accordance with all applicable laws and ordinances, has in any non-supporting part, member, or portion less than 50 percent [or in any supporting part, member, or portion less than 66 percent] of the (i) strength; (ii) fire-resisting qualities or characteristics; or (iii) weather-resisting qualities or characteristics required by law in the case of a newly constructed building of like area, height, and occupancy in the same location.
14	Whenever a building or structure, used or intended to be used for dwelling purposes, because of inadequate maintenance, dilapidation, decay, damage, faulty construction, or arrangement, inadequate light, air, or sanitation facilities, or otherwise, is determined to be unsanitary, unfit for human habitation, or in such a condition that is likely to cause sickness or disease.
15	Whenever any building or structure, because of dilapidated condition, deterioration, damage, inadequate exits, lack of sufficient fire-resistive construction, faulty electric wiring, gas connections or heating apparatus, or other cause, is determined to be a fire hazard.
16	Whenever any building or structure is in such a condition as to constitute a public nuisance known to the common law or in equity jurisprudence.
17	Derelict Buildings where Alternate Procedures have been undertaken pursuant to the provisions of Section 2.01.060.D.8.b.

(Ord. 27908 Ex. A; passed Aug. 17, 2010: Ord. 27875 Ex. A; passed Feb. 23, 2010: Ord. 27027 § 1; passed Dec. 10, 2002: Ord. 26715 § 3; passed Oct. 17, 2000: Ord. 26380 § 1; passed Mar. 16, 1999: Ord. 20530 § 2; passed Aug. 26, 1975: Ord. 17517 § 1; passed Jan. 2, 1964: Ord. 16384 § 5; passed Jun. 29, 1959: Ord. 15742 §§ 1-13; passed Nov. 13, 1956)

**2.01.070 Minimum building requirements.**

No owner shall maintain, or permit to be maintained, any property which does not comply with the requirements of this chapter. All property shall be maintained to the Building Code requirements in effect at the time of construction. Alterations or repairs shall meet the minimum standards in this section and the repair standards set forth in Section 2.01.080, Repair Standards.

**A. Display of Address Number.**

Address numbers posted shall be the same as the number assigned by the City of Tacoma Building and Land Use Services Division. All buildings shall have address numbers posted in a conspicuous place on contrasting background so they may be read from the street or public way. Tenant spaces in buildings shall be clearly numbered or lettered, in a logical and consistent manner.

**B. Foundations.**

Building foundation systems shall adequately support the building. Those parts of the system constructed of wood shall be free from deterioration or dry rot. Concrete and masonry elements shall be integral without substantial fracturing or cracks.

Exterior walls shall be supported on a continuous concrete or masonry foundation, or an engineer-designed foundation system, which accounts for both vertical and lateral (earthquake and wind) loads, shall be provided. In absence of a continuous masonry or concrete foundation, an approved skirting system shall be provided to prevent the entrance of rodents and other animals to the crawl space or under-floor area of the building.

The building shall be anchored to the foundation system in an approved manner.

Under-floor areas shall be ventilated by an approved mechanical means or by openings in the exterior foundation walls to provide natural ventilation.

**C. Floors.**

Floors shall be even, without breaks or holes, and constructed of materials of adequate strength to support the dead loads of the floor materials and the live loads required by the Building Code in effect at the time the building was built. Floors shall be reasonably level and free from deterioration and dry rot.

**D. Exterior Walls.**

Exterior walls and exposed exterior surfaces shall be structurally sound, and shall form a weather-tight

barrier to the outside elements. Exterior walls shall be free from deterioration and dry rot.

Exterior walls shall comply with the Building Code in effect at the time the building was built for fire resistance, parapets, and opening protection.

**E. Windows and Glazing.**

Windows and glazing shall be in good condition and maintain a weather barrier against the elements. All glazing shall be uncracked and unbroken. Operable windows shall be able to operate in the manner in which they were designed, and shall not be painted closed or otherwise bind in a manner rendering them inoperable. Sash weights and cords shall be intact and in good condition if needed for the operation of the windows. Frames and sashes shall be free of deteriorated or rotted materials.

**F. Roofs.**

Roof structures shall be structurally sound and free of deteriorated or rotted materials. Roofing shall be weather tight and provide protection to the interior of the building from outside elements. Roof drainage shall be directed to approved locations. Roofs shall be maintained in good repair.

Roof systems shall be provided with adequate ventilation to prevent deterioration.

An attic where the ceiling or roof is constructed of combustible materials and which has a vertical height of 30 inches or more shall be provided with an access opening as required by the Building Code in effect at the time the building was built. If one does not exist, then provide an attic access opening to current code.

**G. Exterior Stairs, Ramps, Porches, and Decks.**

Every exterior stair, ramp, porch, deck, or other exterior appurtenances, including guardrails and handrails, shall be constructed of materials of sufficient strength to perform the function for which it is designed and to carry the live and dead loads prescribed by the Building Code in effect at the time the building was built. All material shall be kept in sound condition and good repair. Replacement of materials shall be made, as necessary, of flooring treads, risers, stringers, decking, and other materials that show excessive wear, and/or are broken, warped, loose, or deteriorated. Weather-exposed surfaces shall be protected in an approved manner.

**H. Exits.**

All buildings shall be provided with exits in accordance with the Building Code.

Exception: Exiting systems which met the Building Code at the time that the building or structure was

constructed, which have been maintained in good condition and do not pose a danger to life, in the opinion of the Building Official, may be accepted as an alternative to the Building Code.

Exits shall terminate at a public street or shall terminate to a place of refuge which is sufficiently large enough to receive all the occupants in the structure, and which is no less than 60 feet from the building or structure.

I. Doors, Latches, and Locks.

~~All exit doors shall comply with the Building Code in effect at the time the building was built for width and height.~~ The width and height for all exit doors shall comply with the Building Code in effect at the time the building was originally constructed, and shall be openable from the inside interior without a key or special knowledge. All doors serving an occupant load of 50 or more shall swing in the direction of egress.

Doors serving an occupant load of less than ten, as calculated by the Building Code, may have dead bolts, provided ~~they are provided with~~ a thumb operator, knob, or equivalent is installed on the inside interior side of the door. Dead bolts which require keys to be operated from the inside interior are not permitted.

Doors serving occupancies classified as Group A (Assembly), Group E (Educational or Day Care), Group H (Hazardous), and Group I (Institutional) shall be provided with panic hardware when serving occupant loads of 50 or more as calculated by the Building Code, or when otherwise required by the Building Code.

J. Corridors.

Corridors shall be constructed in accordance with the provisions of the Building Code in effect at the time the building was built constructed. Corridors shall terminate at doors to the exterior of the building or to doors leading to stair enclosures or to doors passing through horizontal exits, as defined by the Building Code. Exits from corridors shall not pass through intervening rooms except for lobbies and waiting areas constructed to corridor standards as defined by the Building Code in effect at the time the building was built constructed.

K. Stairways and Stair Enclosures.

Stairs shall be constructed as required by the Building Code in effect at the time the building was constructed. Stairs shall be enclosed when required by the Building Code in effect at the time the stair enclosure was built constructed.

Exceptions:

1. Stairways constructed prior to July 1, 1988, which serve occupant loads of ten or more, but which have risers in excess of 7 inches but not exceeding 7.5 inches, and/or have treads with a depth less than 11 inches but not less than 10 inches measured from tread nose to tread nose.
2. Buildings and structures which have fire escapes which have been maintained and tested in accordance with the Building Code and the Fire Code. See Subsection Q, Fire Escapes, of this chapter.

L. Ramps.

Ramps shall be constructed as required by the Building Code.

Exception: Existing ramps which do not exceed a slope of one vertical to eight horizontal (12.5 percent) and which conformed to the Building Code in effect at the time the building or structure was constructed may be used for exiting purposes, provided there are landings at the top and the bottom of the ramp which have lengths equal to the width of the ramp, or 36 inches, whichever is greater. The length of such landings do not need to exceed 44 inches.

M. Guardrails.

Unenclosed floor and roof openings, open and glazed sides of stairways, landings and ramps, balconies or porches, which are more than 30 inches above grade or floor below, and roofs used for other than service of the building shall be protected by a guardrail.

Exception: Guardrails need not be provided at the following locations:

1. On the loading side of loading docks.
2. On the auditorium side of a stage, raised platforms, and other raised floor areas, such as runways, ramps, and side stages used for entertainment or presentation; along the side of an elevated walking surface, when used for the normal functioning of special lighting or for access and use of other special equipment; at vertical openings in the performance area of stages.
3. Along vehicle service pits not accessible to the public.

Height. The top of guardrails shall meet the requirements of Building Code in effect at the time the guardrail was built, but need not exceed 42 inches in height.

Exceptions:

1. The top of guardrails for Group R, Division 3 and Group U, Division 1 Occupancies, and interior

guardrails within individual dwelling units, Group R, Division 3 congregate residences and guest rooms of Group R, Division I Occupancies, do not need to exceed 36 inches in height.

2. The top of guardrails on a balcony immediately in front of the first row of fixed seats and which are not at the end of an aisle may be 26 inches in height.

3. The top of guardrails for stairways, exclusive of their landings, may have a height as specified in the Stairway Handrails section of this chapter.

Openings. Open guardrails shall have intermediate rails or an ornamental pattern ~~such~~ that complies with the Building Code in effect at the time the guardrail was built. If the guardrail is new or needs to be reconstructed, the intermediate rails or ornamental pattern shall comply with the presently adopted Building Code. If the existing guardrail does not have intermediate rails or an ornamental pattern, intermediate rails or an ornamental pattern shall be provided which complies with the presently adopted Building Code.

#### N. Stairway Handrails.

Stairways shall have handrails on each side, and every stairway required to be more than 88 inches in width shall be provided with not less than one intermediate handrail for each 88 inches of required width. Intermediate handrails shall be spaced approximately equally across with the entire width of the stairway.

Exceptions:

1. Stairways less than 44 inches in width or stairways serving one individual dwelling unit in Group R, Division 1 or Division 3 Occupancies, or a Group R, Division 3 congregate residence, may have one handrail.

2. Private stairways 30 inches or less in height may have handrails on one side only.

3. Stairways having less than four risers and serving one individual dwelling unit in Group R, Division 1 or Division 3, or a Group R, Division 3 congregate residence, or serving Group U Occupancies, need not have handrails.

The top of handrails and handrail extensions shall meet the requirements of the Building Code in effect at the time the stairway was built, but in no case shall be less than 30 inches nor more than 38 inches above the nosing of treads and landings. Handrails shall be continuous the full length of the stairs. Handrail ends shall be returned or shall terminate in newel posts or safety terminals.

The handgrip portion of handrails shall meet the requirements of the Building Code in effect at the time the stairway was built. The handgrip portion of handrails shall have a smooth surface with no sharp corners.

Handrails projecting from a wall shall have a space of not less than 1-1/2 inches between the wall and the handrail.

Handrails used to protect the open side of stairways or landings shall be provided with intermediate rails or an ornamental pattern, when the drop from the stairs or landing is 30 inches or more to the ground or surface below. The intermediate rails or patterns shall be as required by the Building Code under which it was constructed. If such handrail is new or being replaced, it shall meet the requirements of the presently adopted Building Code. If such handrail is existing, but is not provided with intermediate rails or ornamental pattern, intermediate rails or an ornamental pattern shall be provided to comply with the presently adopted Building Code.

#### O. Exit Path Lighting.

General. Except within individual dwelling units, guest rooms, and sleeping rooms, exits shall be illuminated at any time the building is occupied, with light having intensity of not less than 1.0 foot-candle at floor level.

Exception: In auditoriums, theaters, concert or opera halls, and similar assembly uses, the illumination at floor level may be reduced during performances to not less than 0.2 foot-candle.

Sources of Power. The power supply for exit illumination shall normally be provided by the premises' wiring system. Emergency backup power or power on separate circuits shall be in accordance with the Building Code in effect at the time the lighting was installed.

#### P. Exit Signs.

Where Required. When two or more exits from a story are required, exit signs shall be installed at stair enclosure doors, horizontal exits, and other required exits from the story. When two or more exits are required from a room or area, exit signs shall be installed at the required exits from the room or area and where otherwise necessary to clearly indicate the direction and path of egress.

Exceptions:

1. Main exterior exit doors, which obviously and clearly are identifiable as exits, need not be signed when approved by the Building Official.

2. Group R, Division 3, and individual units of Group R, Division 1 Occupancies.
3. Exits from rooms or areas with an occupant load of less than 50 when located within a Group I, Division 1.1, 1.2, or 2 Occupancy, or a Group E, Division 3 day-care occupancy.

Graphics. The color and design of lettering, arrows, and other symbols on exit signs shall be in high contrast with their background. Words on the signs shall be in block letters 6 inches in height with a stroke of not less than 3/4 inch, or in accordance with the Building Code in effect at the time the original signs were installed.

Illumination. Signs shall be internally or externally illuminated in accordance with the Building Code in effect at the time the exit signs were installed.

Power Supply. Current supply to one of the lamps for exit signs shall be provided by the premises' wiring system. Power to the other lamp shall be from storage batteries or an on-site generator set, and the system shall be installed in accordance with the Electrical Code or in accordance with the Building Code in effect at the time the exit signs were installed.

#### Q. Fire Escapes.

New fire escapes shall not be permitted to be installed. Existing fire escapes complying with this section may be accepted by the Building Official as one of the required exits. The fire escape shall not be the primary or the only exit. Fire escapes shall not take the place of stairways required by the codes under which the building was constructed. Fire escapes shall be subject to re-inspection as required by the Building Official. The Building Official shall require documentation to show compliance with the requirements of this section.

Fire escapes shall comply with the following:

1. Access from the corridor shall not be through an intervening room.

Exception: Access through an intervening room may be permitted if the intervening door is not lockable and an exit sign is installed above the door which will direct occupants to the fire escape. Such intervening rooms shall not be storage rooms, mechanical equipment rooms, kitchens, or similar spaces, and shall be common to the building in general and not part of a tenant space.

2. All openings in an exterior wall below or within 10 feet, measured horizontally, of an existing fire escape serving a building over two stories in height, shall be protected by a self-closing fire assembly

having a three-fourths-hour fire protection rating. When located within a recess or vestibule, adjacent enclosure walls shall be of not less than one-hour fire-resistive construction.

3. Egress from the building shall be by an opening having a minimum clear width and height of not less than 29 inches. Such openings shall be openable from the ~~inside-interior~~ without the use of a key or special knowledge or effort. The sill of an opening giving access to the fire escape shall ~~be not more than exceed~~ 30 inches above the floor of the building or balcony. The top of the frame of the opening giving access to the fire escape shall be ~~not less than a~~ minimum of 59 inches above the floor.

4. Fire escape stairways and their balconies shall support their dead load plus a live load of not less than 100 pounds per square foot or a concentrated load of 300 pounds placed anywhere on the balcony or stairway so as to produce the maximum stress conditions. The stairway shall have a slope not to exceed 60 degrees from the horizontal and shall have a minimum width of 18 inches. The stairway shall be provided with a top and intermediate railing on each side. Treads shall not be less than 4 inches in width, and the rise between treads shall not exceed 10 inches. All stairway and balcony railings shall support a horizontally applied force of not less than 50 pounds per lineal foot of railing or a concentrated load of 200 pounds placed anywhere on the railing so as to produce the maximum stress conditions.

5. Fire escape balconies shall not be less than 44 inches in width with no floor openings greater than 5/8 inch in width except the stairway opening. Stairway openings in such balconies shall not be less than 22 inches by 44 inches. The guardrail of each balcony shall not be less than 36 inches high with not more than 9 inches between intermediate rails.

6. Fire escapes shall extend to the roof or provide an approved gooseneck ladder between the top floor landing and roof when serving buildings four or more stories in height having roofs with a slope not exceeding 4 in 12. Such ladders shall be designed and connected to the building to withstand a horizontal force of 100 pounds per lineal foot; each rung shall support a concentrated load of 500 pounds placed anywhere on the rung so as to produce the maximum stress conditions. All ladders shall be at least 15 inches in clear width, be located within 12 inches of the building, and shall be placed flat wise relative to the face of the building. Ladder rungs shall be 3/4 inch in diameter and shall be located 10 inches to 12 inches on center. Openings for roof access ladders through cornices and similar

projections shall have minimum dimensions of 30 inches by 33 inches.

7. The lowest balcony shall not be more than 18 feet from the ground. Fire escapes shall extend to the ground or be provided with counter-balanced stairs reaching the ground.

8. Fire escapes shall be kept clear and unobstructed at all times and shall be maintained in good working order. Fire escape stairways, balconies, railings, and ladders shall be visually inspected annually and shall be subjected to a stress test every five years in accordance with the provisions of Chapter 3.02 of the Tacoma Municipal Code. Fire escapes failing the stress test shall be repaired or removed from the building, as directed by the Fire Chief. If the fire escape is removed from the building, it shall be replaced with stairways meeting all requirements for stairways in new construction.

9. The fire escape shall have clearance from electrical service conductors as required by the Electrical Code.

R. Exits for Sleeping Rooms.

All sleeping rooms below the fourth story in buildings shall be provided with two exits. One of the exits may be a window opening onto a public way or into a court or yard which provides access to a public way. Such exit window shall provide a net openable area of 5.7 square feet with a minimum clear width of 20 inches and a minimum clear height of 24 inches, and a maximum sill height of 44 inches measured from the floor of the sleeping room.

Exceptions:

1. In buildings constructed prior to May 26, 1981, existing window with a net openable area of 5 square feet, a minimum clear width of 22 inches, a minimum clear height of 22 inches, and a maximum sill height of 48 inches measured from the floor of the sleeping room, shall be deemed to meet the exit window requirement. Where the window frame is to be replaced, this exception shall not apply, except as necessary to fit within the rough framed opening, in which case the opening dimensions shall be maximized. (Note: If a new opening needs to be created or an existing opening needs to be enlarged to provide an exit window from a sleeping room, this exception shall not apply.)

2. Where the sill height exceeds the maximum specified, including when Exception 1 applies, a landing with a minimum depth of 24 inches and width equal to the width of the window and frame, but not less than 36 inches, may be provided directly below the exit window within the sleeping room, provided: stairs shall be provided to the landing if its

height exceeds 12 inches above the sleeping room floor, and that the landing and stairs do not decrease the minimum required dimensions of the sleeping room below those required by this chapter and the Building Code.

3. The size of egress windows below the fourth floor opening onto a court yard may be modified by the Building Official or the Fire Chief.

Escape and rescue windows with a finished sill height below the adjacent ground elevation shall have a window well. Window wells at escape or rescue windows shall comply with the following:

1. The clear horizontal dimensions shall allow the window to be fully opened and provide a minimum accessible net clear opening of 9 square feet, with a minimum dimension of 36 inches.

2. Window wells with a vertical depth of more than 44 inches shall be equipped with an approved permanently affixed ladder or stairs that are accessible with the window in the fully open position. The ladder or stairs shall not encroach into the required dimensions of the window well by more than 6 inches.

Bars, grilles, grates, or similar devices may be installed on emergency escape or rescue windows, doors, or window wells, provided:

1. The devices are equipped with approved release mechanisms which are openable from the inside interior without the use of a key or special knowledge or effort; and

2. The building is equipped with smoke detectors installed in accordance with the Building Code.

S. Minimum Room Dimensions for Residential Buildings.

1. Ceiling heights. Habitable space shall have a ceiling height of not less than 7 feet, ~~6 inches, except as otherwise permitted in this section. Kitchens, halls, bathrooms, and toilet compartments may have a ceiling height of not less than 7 feet measured to the lowest projection from the ceiling.~~ Where exposed beam ceiling members are spaced at less than 48 inches on center, ceiling height shall be measured to the bottom of these members. Where exposed beam ceiling members are spaced at 48 inches or more on center, ceiling height shall be measured to the bottom of the deck supported by these members, provided that the bottoms of the members are not less than 7 feet above the floor.

If any room in a building has a sloping ceiling, the prescribed ceiling height for the room is required in only one-half the area thereof. No portion of the

room measuring less than 5 feet from the finished floor to the finished ceiling shall be included in any computation of the minimum area thereof.

If any room has a furred ceiling, the prescribed ceiling height is required in two-thirds the area thereof, but in no case shall the height of the furred ceiling be less than 7 feet.

Exception: The Building Official may permit lower ceiling heights where existing conditions make the strict compliance with this section impractical.

2. Floor area. Dwelling units and congregate residences shall have at least one room which shall have not less than 120 square feet of floor area. Other habitable rooms, except kitchens, shall have an area of not less than 70 square feet. Sleeping rooms shall be increased in floor area by a minimum of 50 square-feet for each occupant in excess of two. Efficiency dwelling units shall comply with the requirements of Subsection T.

3. Width. Habitable rooms, other than a kitchen, shall not be less than 7 feet in any dimension.

T. Efficiency Dwelling Units.

An efficiency dwelling unit shall conform to the requirements of the Building Code in effect at the time the building was constructed, except as herein provided:

1. The unit shall have a living room of not less than 220 square feet of superficial floor area. An additional 100 square feet of superficial floor area shall be provided for each occupant of such unit in excess of two.

2. The unit shall be provided with a separate closet.

3. The unit shall be provided with a kitchen sink, cooking appliance, and refrigeration facilities, each having a clear working space of not less than 30 inches in front. Light and ventilation conforming to this chapter shall be provided.

4. The unit shall be provided with a separate bathroom containing a water closet, lavatory, and bathtub or shower.

U. Residential Dwelling or Dwelling Unit Room Arrangement.

Rooms in dwellings and dwelling units containing two or more sleeping rooms shall be arranged in such a manner that bathroom or water closet compartment access is provided without traveling through a sleeping room.

Exception: Where each bedroom has its own bathroom facilities.

Rooms in dwellings or dwelling units shall be so arranged that access to all sleeping rooms can be made directly without traveling through other sleeping rooms, bathrooms, or water closet compartments.

Dwellings and dwelling units shall be self-contained, with access to all portions being possible without leaving the dwelling or dwelling unit.

V. Overcrowding, Residential Buildings.

For single family dwellings, ~~and duplexes, and multi-family dwellings with 3 or more units,~~ the maximum number of residents of each dwelling unit shall not exceed the gross area divided by ~~300~~200, rounded to the nearest whole number. Bedrooms will accommodate two persons with a minimum size of 70 square feet, with no dimension being less than 7 feet. An additional 50 square feet shall be provided for each person in excess of two.

~~For multiple family dwellings buildings with three or more units, the maximum number of residents of each dwelling unit shall not exceed the gross area divided by 200, rounded to the nearest whole number. Bedrooms will accommodate two persons with a minimum size of 70 square feet, with no dimension being less than 7 feet. An additional 50 square feet shall be provided for each person in excess of two.~~

Children less than one year of age shall not be considered in applying the above provisions.

W. Smoke Detectors and Fire Alarm Systems.

1. Smoke detectors.

a. General. Dwelling units, congregate residences, and hotel or lodging house guest rooms that are used for sleeping purposes shall be provided with smoke detectors. Detectors shall be installed in accordance with the approved manufacturer's instructions.

b. Additions, alterations, or repairs to Group R Occupancies. When the valuation of an addition, alteration, or repair to a Group R Occupancy exceeds \$1,000.00 and a permit is required, or when one or more sleeping rooms are added or created in existing Group R Occupancies, smoke detectors shall be installed in accordance with the current Building Code.

Exception: Repairs to the exterior surfaces of a Group R Occupancy are exempt from the requirements of this section.

c. Power source. In new construction, required smoke detectors shall receive their primary power from the building wiring when such wiring is served

from a commercial source, and shall be equipped with a battery backup. The detector shall emit a signal when the batteries are low. Wiring shall be permanent and without a disconnecting switch other than those required for over-current protection. Smoke detectors may be solely battery operated when installed in existing buildings; or in buildings without commercial power; or in buildings which undergo alterations, repairs or additions regulated by the Building Code.

d. Location within dwelling units. In dwelling units, a detector shall be installed in each sleeping room and at a point centrally located in the corridor or area giving access to each separate sleeping area. When the dwelling unit has more than one story, and in dwellings with basements, a detector shall be installed on each story and in the basement. In dwelling units where a story or basement is split into two or more levels, the smoke detector shall be installed on the upper level, except that when the lower level contains a sleeping area, a detector shall be installed on each level. When sleeping rooms are on an upper level, the detector shall be placed at the ceiling of the upper level in close proximity to the stairway. In dwelling units where the ceiling height of a room open to the hallway serving the bedrooms exceeds that of the hallway by 24 inches or more, smoke detectors shall be installed in the hallway and in the adjacent room. Detectors shall sound an alarm audible in all sleeping areas of the dwelling unit in which they are located.

e. Location in efficiency dwelling units, congregate residences and hotels. In efficiency dwelling units, hotel suites, and in hotel and congregate residence sleeping rooms, detectors shall be located on the ceiling or wall of the main room or each sleeping room. When sleeping rooms within an efficiency dwelling unit or hotel suite are on an upper level, the detector shall be placed at the ceiling of the upper level in close proximity to the stairway. When actuated, the detector shall sound an alarm audible within the sleeping area of the dwelling unit or congregate residence, hotel suite, or sleeping room in which it is located.

## 2. Fire Alarm Systems.

a. Group R, Division 1 Occupancies shall be provided with an approved manual and automatic fire alarm system in apartment houses three or more stories in height or containing 16 or more dwelling units, in hotels three or more stories in height or containing 20 or more guest rooms, and in congregate residences three or more stories in height or having an occupant load of 20 or more. A fire alarm and communication system shall be provided in Group R,

Division 1 Occupancies located in a high-rise building.

### Exceptions:

1. A manual fire alarm system need not be provided in buildings not over two stories in height when all individual dwelling units and contiguous attic and crawl spaces are separated from each other and public or common areas by at least one-hour fire-resistive occupancy separations and each individual dwelling unit or guest room has an exit directly to a public way, exit court, or yard.
2. A separate fire alarm system need not be provided in buildings which are protected throughout by an approved supervised fire sprinkler system having a local alarm to notify all occupants. The alarm signal shall be a distinctive sound which is not used for any other purpose other than the fire alarm. Alarm-signaling devices shall produce a sound that exceeds the prevailing equivalent sound level in the room or space by 15 decibels minimum, or exceeds any maximum sound level with a duration of 30 seconds minimum by 5 decibels minimum, whichever is louder. Sound levels for alarm signals shall be 120 decibels maximum.

For the purposes of this section, area separation walls shall not define separate buildings.

b Occupancies Other Than Group R. Fire alarm systems shall be provided in all other buildings other than Group R occupancies in accordance with the provisions of the Building Code and Fire Code in effect at the time the building was constructed, or when last substantially renovated, remodeled, extended, or altered.

## X. Kitchen Facilities.

Each dwelling unit shall be provided with a kitchen. The kitchen area shall contain:

1. A sink with hot and cold running water.
2. Space for a stove, ~~or~~ hot plate, or microwave.
3. Space for a refrigerator.
4. Adequate counter space for food preparation and dish washing.
5. Adequate storage space for kitchen utensils and food.
6. Adequate floor space.

Kitchens shall be provided with light and ventilation meeting the minimum standards set forth in this chapter.

Communal kitchens shall be permitted only in rooming house or boarding homes. Such communal kitchens shall be located within a room accessible to the occupants of each guest room sharing the use of the kitchen without going outside the rooming house or boarding home, or going through a unit of another occupant.

Commercial kitchens shall comply with the Mechanical Code in effect at the time the kitchen was constructed, and the requirements of the Tacoma-Pierce County Health Department. Commercial kitchens shall be provided with grease hoods and grease traps or interceptors when determined necessary.

Y. Laundry Facilities.

All residential buildings shall provide facilities for the washing of clothes in accordance with the provisions of the codes in force at the time the building was constructed. In an apartment house, where laundry facilities are not provided for each unit, means such as laundry trays or washing machines shall be provided elsewhere on site and shall be available to tenants.

Z. Electrical System and Lighting.

All occupied buildings shall be connected to an approved source of electrical power. An approved source of electrical power shall be Electrical Utilities authorized to furnish electrical power within the limits of the City of Tacoma.

All electrical equipment, components, and wiring shall be installed and maintained in a safe manner in accordance with applicable codes. All electrical equipment shall be listed by an approved testing and/or listing agency. All damaged or missing electrical components or equipment shall be replaced, repaired, or removed as appropriate.

The electrical system shall be safe and not be a shock or fire hazard to the occupants of the building. Services shall be adequately sized and provided with fuses, breakers, and other appropriate safety equipment. Wiring shall be maintained in a safe condition.

Exit facilities and other hallways and stairs shall be provided with supplied and operable lighting capable of providing a minimum of one foot-candle lighting intensity at floor level. Emergency power shall be provided if required by the code under which the building was constructed.

Every habitable room shall contain at least two supplied and operable electrical convenience outlets,

or one supplied electric convenience outlet and one supplied and operable light fixture.

Every kitchen, furnace room, and laundry room shall contain at least one supplied electric convenience outlet and one supplied and operable light fixture.

Every bathroom, rest room, and toilet compartment shall contain at least one supplied and operable electric light fixture. In addition, every room containing lavatories shall be provided with at least one convenience outlet.

AA. Heating, ~~and~~ Mechanical, and Elevator Equipment.

Heating equipment shall be provided to heat every dwelling and guest room, and shall have the capacity to heat all habitable rooms to 70 degrees Fahrenheit with an ambient outside temperature of 20 degrees Fahrenheit. Such equipment shall be in compliance with the Mechanical Code ~~and or~~ the Building Code in effect at the time of installation. Solid-fuel-burning appliances and portable heating devices shall not be used to provide the primary heat for the dwelling or guest rooms.

Elevators shall be maintained in compliance with the code at the time of installation and the manufacturer's specifications.

BB. Water Heating Equipment.

Every dwelling or dwelling unit shall have water heating equipment which is properly installed and maintained in safe and good working condition. Such equipment shall be provided with piping to distribute the hot water to all locations required by the Building, Plumbing, and Mechanical Codes and this chapter. Water heating equipment shall be capable of heating water to 120 degrees Fahrenheit in quantities to permit a reasonable amount of hot water to be drawn at every required kitchen sink, lavatory, bathtub, or shower on demand. Hot water heating equipment shall have its thermostat set no lower than 120 degrees Fahrenheit, and shall be provided with all safety equipment prescribed by the Plumbing and Mechanical Codes. Water-heating equipment required by this section shall be independent of the building heating system.

CC. Light and Ventilation.

1. Lighting. All occupied portions of buildings shall be provided with natural or artificial light.

All habitable rooms in residential dwelling buildings or dwelling units shall be provided with natural light.

Natural light shall be provided for each room by windows and/or skylights which combine to have a

minimum area of one-tenth (1/10) of the floor area of the room or combination of rooms being considered.

Artificial light shall be provided with electrical fixtures wired to house power provided by a supply utility which provide a minimum light intensity of 1.0 foot-candle at floor level. Existing lighting which met the Building Code in effect at the time the building was constructed, has been maintained in safe condition, and which provides the minimum 1.0 foot-candle at floor level is deemed as meeting this section. New lighting shall be required to meet the Washington State Energy Code.

Adjacent rooms may be considered as one room, provided that the opening in the wall between the two rooms provide a minimum clear opening of one-tenth (1/10) of the floor area of the interior room, 25 square feet, or one-half of the area of the wall between the rooms, whichever is greater.

2. Ventilation. All occupied portions of buildings shall be provided with natural or mechanical ventilation.

Natural ventilation shall be by means of openable windows, doors, skylights, or other approved openings to the exterior of the building. Natural ventilation shall be provided at a rate of one-twentieth (1/20) of the floor area of the space or combination of spaces being considered.

Existing mechanical ventilation meeting the requirements of the Building and Mechanical Codes in effect at the time the building was constructed shall be considered satisfactory. New or revised mechanical ventilation shall meet the requirements of the Washington State Ventilation and Indoor Air Quality Code.

DD. Solid-Fuel-Burning Appliances.

~~Solid fuel burning appliances shall be listed by an approved testing and/or listing agency, and shall be installed in accordance with their listings for clearances, chimneys, and floor protection.~~

~~Exception: Unlisted solid fuel burning appliance installations which existed prior to 1977, and which are in good condition, may remain, provided:~~

~~1. The clearances to combustibles are in accordance with Tables 3-A and 3-B of the 1994 Uniform Mechanical Code.~~

~~2. The installation meets the requirements of the Building Code in effect at the time of the installation.~~

~~Solid fuel burning appliances shall not be used as the primary heating source for dwelling units.~~

~~Exception: Solid fuel burning furnaces with an approved ducted heat distribution system, and an automatic fuel delivery system.~~

~~A solid fuel burning device means any device for burning wood, coal, or any other non-gaseous and non-liquid fuel. A City of Tacoma building permit is required for the installation of a solid fuel burning device.~~

Solid fuel burning appliances shall be listed by an approved testing agency and shall be installed in accordance with their listing and with the manufacturers installation instructions and shall comply with the applicable Washington State Department of Ecology emissions standards and/or the United States Environmental Protection Agency emission standards for air quality.

The appliance shall be vented in accordance with the International Mechanical Code, International Building Code or the International Residential Code. Masonry chimneys must be lined. Factory built chimneys shall be listed by an approved testing agency and shall be installed in accordance with their listing.

The installation of a used appliance is prohibited, except for engineered installations with prior approval by the Building Official or other authorities having jurisdiction.

EE. Chimneys.

Every smoke pipe and every chimney shall remain adequately supported and free from obstructions and shall be maintained in a condition which ensures there will be no leakage or back-up of noxious gases. Every chimney shall be reasonably plumb. Loose bricks or blocks shall be rebonded. Loose or missing mortar shall be replaced. Unused openings into the interior of the structure must be permanently sealed using approved materials. Chimneys used for approved gas appliances shall be lined with approved materials.

Masonry chimneys supported on chimney brackets ("shelf chimneys") shall be removed, or the chimney shall be modified to provide an approved support system.

FF. Plumbing.

Supply, waste, and vent plumbing piping shall be in good condition and free from leaks. Waste piping shall be adequately sized to safely convey waste water to the City Sewer or to other approved plumbing waste disposal systems. Vent piping shall be adequately sized and configured to prevent siphoning of plumbing fixture traps. All plumbing

fixtures shall be in good condition, free from cracks and leaks, and shall be properly connected to the waste and vent system of the building.

GG. Number of Plumbing Fixtures.

Dwelling Units: Every dwelling unit shall be provided with a kitchen sink, a water closet, a lavatory (bathroom sink), and either a bathtub or a shower.

Lodging Houses: Lodging Houses shall be provided with a minimum of a kitchen sink, a water closet, a lavatory (bathroom sink), and a bathtub or a shower, provided that, where the bathtub or shower is provided in the same room as a water closet and lavatory, that there shall be an additional water closet and lavatory in the building in a different location.

Apartment Houses, Hotels, and Motels: Each apartment house dwelling unit, hotel unit, or motel unit shall be provided with a water closet, a lavatory (bathroom sink), and a bathtub or a shower.

Exception: Apartment houses, hotels, and motels existing prior to January 1, 1961, which contain communal toilet and bathing facilities rather than facilities for each unit, may continue operation without requiring modification, provided:

1. There are separate toilet and bathing facilities for each sex.
2. Toilet and bathing facilities shall be separate from each other or of adequate size to permit simultaneous use.
3. The men's toilet facilities shall contain:

Water Closets: One for every ten guest rooms, or fraction thereof, but not less than one.

Urinals: One for every 25 guest rooms, or fraction thereof, but not less than one.

Lavatories: One for every 12 guest rooms, or fraction thereof, but not less than one.

4. The women's toilet facilities shall contain:

Water Closets: One for every eight guest rooms, or fraction thereof, but not less than one.

Lavatories: One for every 12 guest rooms, or fraction thereof, but not less than one.

5. The bathing facilities for each sex shall contain:

One shower and bathtub combination and, in addition, shall provide one additional shower for every eight guest rooms over eight.

Dormitories: Dormitories shall provide toilet facilities in accordance with the exception listed for Hotels and Motels.

Commercial and Industrial Buildings: Commercial and Industrial Buildings shall be provided with toilet facilities for each sex. Each toilet facility shall be provided with a minimum of one water closet and one lavatory. In addition, each men's toilet facility shall also be provided with a urinal where there are more than four persons using the facility.

Exceptions:

1. Commercial and Industrial buildings may provide a single toilet facility with a lockable door where four or less persons are employed.
2. Restaurants with seating for 24 or less patrons may provide a single toilet facility with a lockable door.

The number of fixtures provided in each of the toilet facilities for commercial and industrial buildings shall meet the requirements set forth in the Building Code.

Exception: Toilet facilities which provided adequate fixtures in accordance with the Plumbing Code in effect when the building was constructed.

HH. Sanitation.

1. Floors. In other than dwelling units, toilet room floors shall have a smooth, hard, nonabsorbent surface, such as Portland cement, concrete, ceramic tile, or other approved material which extends upward onto the walls at least 5 inches.
2. Walls. Walls within 2 feet of the front and sides of urinals and water closets shall have a smooth, hard, nonabsorbent surface of Portland cement, concrete, ceramic tile, or other smooth, hard, nonabsorbent surface to a height of 4 feet, and except for structural elements, the materials used in such walls shall be of a type which is not adversely affected by moisture.

Exceptions:

1. Dwelling units and guest rooms.
2. Toilet rooms which are not accessible to the public and which have not more than one water closet.
3. Hardware. In all occupancies, accessories such as grab bars, towel bars, paper dispensers, and soap dishes, provided on or within walls, shall be installed and sealed to protect structural elements from moisture.
4. Bathtub and Shower. Bathtub and shower enclosures in all occupancies shall be finished as specified in items 1 and 2 above, to a height of not

less than 70 inches above the drain inlet. Materials other than structural elements used in such walls shall be of a type which is not adversely affected by moisture.

5. Water Closet Room Separation. A room in which a water closet is located shall be separated from food preparation or food storage rooms by tight-fitting doors.

II. Infestation.

Every building shall be kept free from infestations of vermin. Where infestations of vermin are found, they shall be promptly eliminated by extermination. After elimination of infestations, proper precautions shall be taken to prevent reinfestations. (See definition of vermin.)

JJ. Accessory Structures.

All accessory structures shall be maintained structurally safe and sound and in good repair. All exterior surfaces of accessory structures shall be of a material specifically for use in such a weather-exposed location. Accessory structures shall not be used for the storage of garbage or rubbish unless such garbage or rubbish is placed in an approved container or stored in a manner so as not to constitute a health or safety hazard.

An accessory structure shall contain no habitable space. No person shall occupy or allow another to occupy an accessory structure for living purposes. Plumbing shall not be permitted in an accessory structure, except as permitted by the Tacoma Land Use Regulatory Code.

Accessory buildings are not permitted on building lots separate from the main building, except as permitted by the Tacoma Land Use Regulatory Code. Detached accessory buildings located on a site where the main building has been removed may remain on the lot for up to a year, without the main building being replaced.

Exception: With the permission of the Building Official, accessory buildings may remain on a building lot where the main building has been destroyed for longer than one year, for sufficient reasons, presented to the Building Official in writing.

KK. Accessibility for the Physically Disabled.

All buildings shall be in compliance with the provisions of the ~~Washington State Code for Barrier Free Design~~ American National Standards Institute 117.1 that were in effect at the time the building was constructed. Additions, renovations and/or remodeling of existing buildings shall meet the requirements of the present American National

~~Standards Institute 117.1 Washington State Code for Barrier Free Design~~ as it applies to existing buildings and to the specific project.

LL. Exterior Maintenance.

1. Buildings. The exterior of buildings shall be maintained in a manner which appears neat and orderly. Weatherproofing elements, such as roofing and siding, shall be firmly attached and in good condition. Glazing and exterior doors shall be intact and in good repair. Painted surfaces shall be fully covered and all peeling or blisters shall be scraped and repainted.

2. Sidewalks and Paving. The owner shall be responsible for maintaining sidewalks and other paving on the property. Sidewalks and other paving on the property shall provide a reasonably even surface without potential hazards.

3. Exterior Property Areas, Yards, and Courts. The owner shall be responsible for maintaining all exterior property areas, yards, and courts in a reasonably neat, clean, and sanitary condition. Property areas shall be maintained free from any accumulation of garbage, litter, debris, overgrown, or noxious vegetation, or other conditions which constitute a nuisance as defined by Chapter 8.30 of the Tacoma Municipal Code. For the purposes of this section, owners shall be responsible for maintaining the property to the centerline of abutting public streets and alleys, pursuant to Chapter 9.17 of the Tacoma Municipal Code.

MM. Recreational Vehicles or Other Vehicles.

No recreational vehicles, as defined by this chapter, or other vehicles shall be used for the purpose of living, sleeping, cooking, or any similar use while parked on public or private property.

NN. Cargo Containers and Semi-Trailers.

1. Except as permitted by the City of Tacoma Land Use Regulatory Code, cargo containers shall not be permitted to be used as storage buildings.

2. Semi-trailers shall not be used for storage buildings. (Ord. 26715 § 3A; passed Oct. 17, 2000: Ord. 26380 § 1; passed Mar. 16, 1999: Ord. 20530 § 3; passed Aug. 26, 1975: Ord. 18914 § 1; passed Sept. 2, 1969: Ord. 17517 § 1; passed Jan. 2, 1964: Ord. 16384 § 6; passed Jun. 29, 1959: Ord. 15742 §§ 1-13; passed Nov. 13, 1956)

**2.01.080 -- Repair standards.**

It is recognized that, in order to maintain the properties as required by this chapter, repairs will need to be made. Repairs, renovations, alterations,

and additions in general will be required to meet the applicable codes in effect at the time they are undertaken, with the minimum acceptable standard of repair being made to bring the building or element of a building up to at least the minimum standards listed in Section 2.01.070 of this chapter. The following provisions provide guidelines for these repairs, renovations, alterations, and additions which, when undertaken, require meeting a higher standard or repair than just meeting the minimum requirements set forth in Section 2.01.070 of this chapter.

~~In the case of W~~ where there is a change of use or where there is a substantial renovation as defined by the Building Code, all work shall be in accordance with the Building Code and the UCBC, as adopted and amended by the City of Tacoma in Chapter 2.02 of the Tacoma Municipal Code.

A. Foundations.

When an existing foundation system supporting the exterior walls of a building is a post and beam system, and is found by inspection to be substandard, it shall either be replaced with a continuous concrete or masonry foundation system or shall be analyzed by an engineer as to its structural adequacy to support vertical and lateral loads and shall be modified according to the engineering report to correct deficiencies.

Exception: Skirting and other non-structural material, or occasional deteriorated or damaged structural members, may be replaced with the approval of the Building Official.

The building shall be anchored to the foundation system in an approved manner.

In crawl space construction using combustible materials, a minimum clearance of 18 inches shall be provided between the dirt and the floor joists or flooring, and 12 inches between the dirt and floor beams. The dirt shall be covered by a 6-mil black polyethylene or approved equivalent moisture barrier. When the above under-floor clearances are required, access to the under-floor area shall be provided. Access to under-floor areas shall be provided with a minimum 18-inch by 24-inch opening, unobstructed by pipes, ducts, and similar construction. All under-floor access openings shall be effectively screened or covered. Pipes, ducts, and other construction shall not interfere with the accessibility to or within under-floor areas.

Exception: When proper under-floor clearance is not provided under an existing building, the Building Official may permit the required clearance to be provided only where plumbing or other equipment is

located, provided there is at least adequate clearance to prevent deterioration of materials or where the wood is pressure treated with approved wood preservatives.

Under-floor areas shall be ventilated by an approved mechanical means or by openings in the exterior foundation walls.

Mechanical Ventilation: Mechanical ventilation shall meet the Building Code requirements.

Natural Ventilation: If the under-floor space is to be provided ventilation by openings in the foundation walls, such openings shall have a net area of not less than 1 square foot for each 150 square feet of under-floor area. Openings shall be located as close to corners as is practical and shall provide cross-ventilation. The required area of such openings shall be approximately equally distributed along the length of at least two opposite sides. They shall be covered with corrosion-resistant wire mesh with 1/4-inch square mesh openings.

B. Floors.

Floors which are required to be repaired or reconstructed shall, as nearly as possible, follow the requirements of the Building Code for materials, floor loads, support, bracing, sheathing, and nailing. Where it is not practical, in the opinion of the Building Official, to repair or replace a floor to new building code standards, he/she may approve an alternate level of compliance, which is no less than that required by the Building Code in effect at the time the building was built.

C. Exterior Walls.

Exterior walls and exposed exterior surfaces shall be structurally sound, and shall form a weather tight barrier to the outside elements.

Deteriorated or dry rotted elements of exterior walls shall be replaced or repaired. Siding and weather-resistant coatings or coverings shall be maintained in good condition.

Exterior walls which are opened for repair shall be insulated as required by the Energy Code.

New or rebuilt exterior walls shall comply with the Building Code for fire resistance, parapets, and opening protection.

D. Windows and Glazing.

Broken glazing (panes of glass) may be replaced with new glazing that matches the broken glass in thickness, thermal performance, fire resistance, and strength, provided that safety glazing shall be used to

replace broken glass in all locations where safety glazing is required by the Building Code.

All new windows (glazing and frames) shall meet the Building Code for fire protection due to location relative to the property lines, safety glazing where glass is subject to impact as defined in the Building Code, and the thermal requirements of the Energy Code for building envelope and type of heating.

Exception: In Group R, Division 3 Occupancies where new windows are provided with no modifications to the existing wall framing, the fire protection rating of the new windows shall be at least equal to the windows being replaced.

#### E. Roofs.

Roof structures shall be structurally sound. Roofing shall be weather tight and provide protection to the interior of the building from outside elements. Roof drainage shall be directed to approved locations. Deteriorated or dry-rotted materials shall be replaced or repaired. Roofs shall be maintained in good repair.

Where ventilation is being added to roof systems, the aggregate net ventilation area shall be provided at a rate of 1/150 of the ceiling area.

Exception: Where the outlet vents are 3 feet or more above the inlet vents, the aggregate net roof ventilation area may be reduced to 1/300 of the ceiling area.

The vent area shall be divided evenly between the inlet and outlet vents. Vents shall be so located to provide cross ventilation and to avoid creating unventilated areas. The openings shall be covered with corrosion-resistant metal mesh with mesh openings of 1/4-inch in dimension.

Where attic access openings need to be provided, the opening shall be located in a corridor, hallway, or other readily accessible location. Attics with a maximum vertical height of less than 30 inches need not be provided with access openings. The attic access opening shall not be less than 22 inches by 30 inches. Thirty-inch minimum clear headroom in the attic space shall be provided at or above the access opening.

#### F. Doors, Latches, and Locks.

All new doors serving an occupant load of ten or more, as calculated by the Building Code, shall have a minimum width of not less than 36 inches and a minimum height of not less than 6 feet 8 inches, and shall be openable from the inside without a key or special knowledge. All doors serving an occupant

load of 50 or more shall swing in the direction of egress.

Doors serving an occupant load of less than ten, as calculated by the Building Code, may have dead bolts, provided they have a thumb operator, knob, or equivalent on the inside. Dead bolts which require keys to be operated from the inside are not permitted.

Doors serving occupancies classified as Group A (Assembly), Group E (Educational or Day Care), Group H, (Hazardous), and Group I (Institutional) shall be provided with panic hardware when serving occupant loads of 50 or more, as calculated by the Building Code, or when otherwise required by the Building Code.

#### G. Corridors.

New, reconstructed, or remodeled corridors shall be constructed in accordance with the provisions of the Building Code.

Exception: Existing duct penetration provided with fire dampers in accordance with the Building Code in effect at the time the building or structure was constructed do not need to be updated to the smoke/fire dampers required by the Building Code.

Newly established required corridors shall not have dead ends which exceed 20 feet, and corridors shall terminate at doors to the exterior of the building or to doors leading to stair enclosures or to doors passing through horizontal exits, as defined by the Building Code. Exits from corridors shall not pass through intervening rooms, except for lobbies and waiting areas constructed to corridor standards as defined by the Building Code.

#### H. Stairways and Stair Enclosures.

New or rebuilt stairs shall be constructed as required by the Building Code. New stairs shall be enclosed, when required by the Building Code.

#### I. Guardrails.

New guardrails, and guardrails which need to be replaced, shall meet all the requirements set forth for guardrails in the Building Code.

#### J. Stairway Handrails.

Where stairways are missing handrails, handrails shall be provided which meet all the requirements of the Building Code.

#### K. Exit Path Lighting.

Exit path shall be illuminated at all times the building or structure is occupied. Exit path lighting shall provide a minimum illumination at floor level of 1.0 foot-candle. Where exit path lighting in existing

buildings is missing or is required to be upgraded, it shall meet the following requirements:

General. Except within individual dwelling units, guest rooms, and sleeping rooms, exits shall be illuminated at any time the building is occupied with light having intensity of not less than 1.0 foot-candle at floor level.

Exception: In auditoriums, theaters, concert or opera halls, and similar assembly uses, the illumination at floor level may be reduced during performances to not less than 0.2 foot-candle.

Separate Sources of Power. The power supply for exit illumination shall normally be provided by the premises' wiring system. In the event of its failure, illumination shall be automatically provided from an emergency system for Group I, Divisions 1.1 and 1.2 Occupancies, and for all other occupancies where the exiting system serves an occupant load of 100 or more.

Emergency systems shall be supplied from storage batteries or an on-site generator set and the system shall be installed in accordance with the requirements of the Electrical Code.

L. Exit Signs.

Where exit signs in existing buildings are missing or are required to be upgraded, they shall meet the following requirements:

Where Required. When two or more exits from a story are required, exit signs shall be installed at stair enclosure doors, horizontal exits, and other required exits from the story. When two or more exits are required from a room or area, exit signs shall be installed at the required exits from the room or area and where otherwise necessary to clearly indicate the direction and path of egress.

Exceptions:

1. Main exterior exit doors, which obviously and clearly are identifiable as exits, need not be signed when approved by the Building Official.
2. Group R, Division 3, and individual units of Group R, Division 1 Occupancies.
3. Exits from rooms or areas with an occupant load of less than 50 when located within a Group I, Divisions 1.1, 1.2, or 2 Occupancy, or a Group E, Division 3 day-care occupancy.

Graphics. The color and design of lettering, arrows, and other symbols on exit signs shall be in high contrast with their background. Words on the sign shall be in block letters 6 inches in height with a stroke of not less than 3/4 inch.

Illumination. Signs shall be internally or externally illuminated by two electric lamps or shall be of an approved self-luminous type. When the luminance on the face of an exit sign is from an external source, it shall have an intensity of not less than 5.0 foot-candles from either lamp. Internally-illuminated signs shall provide equivalent luminance.

Power Supply. Current supply to one of the lamps for exit signs shall be provided by the premises' wiring system. Power to the other lamp shall be from storage batteries or an on-site generator set, and the system shall be installed in accordance with the Electrical Code.

(Note: Refer to Building Code for high-rise buildings and for amusement structures.) (Ord. 26380 § 1; passed Mar. 16, 1999; Ord. 17842 § 2; passed Mar. 18, 1965; Ord. 15742 §§ 1-13; passed Nov. 13, 1956)

**2.01.090 Unoccupied, ~~or~~-vacant or partially secured building standards.**

A. Intent.

It is the intent of this section that buildings which are unoccupied, ~~or~~-vacant or partially secured, but are occupied, shall present a neat and orderly appearance, and, as much as possible, will appear occupied or ready for occupancy. If a building is to remain unoccupied or vacant for a period of time, it shall meet the following standards:

1. All exterior openings shall be properly secured as outlined in Subsection C below, Standards for Securing Buildings. Openings shall be secured by the normal building amenities, including, but not limited to, doors, shutters, grills, and window glazing, which can be considered appropriate for securing an occupied building. If it becomes necessary to temporarily secure openings by covering them with structural paneling, the use of the paneling shall be limited to a maximum of 30 calendar days. Where it becomes impractical to secure buildings using the normal security measures, the Building Official may permit the use of medium density overlay or other approved materials, installed in the window frames and painted with a glossy paint of such color to simulate glazing. In such case, the paneling or other approved materials shall blend with the exterior finish of the building, to provide the building with a neat and tended appearance.
2. The building shall be properly weather-protected to prevent deterioration of the exterior and interior of the building. This weather protection shall be approved by the City and shall include the roof and wall assemblies.

3. All miscellaneous debris which constitutes a fire hazard shall be removed from the building and property, and the property shall be left in such condition as to not be in violation of the City of Tacoma’s Nuisance Ordinance, Chapter 8.30 of the Tacoma Municipal Code. The property shall remain nuisance free at all times.

4. All buildings which have automatic fire sprinklers systems and/or fire alarm systems shall have such systems maintained in operable condition at all times.

5. Adequate heat shall be maintained within an unoccupied or vacant building to prevent plumbing and automatic fire sprinkler systems from freezing, or alternatively, the plumbing, automatic fire sprinkler systems, or any other element in the building sensitive to freezing may be winterized in an approved manner.

6. All sewer lines shall be capped. (When approved by the Building and Land Use Services Division, this may be accomplished by providing an approved plug at the fixtures within the building.)

7. The owner shall inspect the property periodically to assure that the property remains in compliance with this chapter. In the event that the unoccupied building does not conform to this standard, the Building Official may order the owner to inspect the property, according to a specific schedule, and to provide written reports that the inspections have been performed and that the property is in compliance with these standards.

B. Procedures for Securing Buildings.

1. Vacant Buildings.

Once a building is determined to be vacant and is open to unauthorized third-party entry, the Building Official shall make reasonable effort to contact the owner to have the building secured. If the owner cannot be contacted with reasonable effort, the City of Tacoma shall secure the building. If such building is presenting an immediate danger to the health, safety, and welfare of the public, or is requested to be immediately secured by the Building Official, the City of Tacoma Police Department, the City of Tacoma Fire Department and/or the Tacoma-Pierce County Health Department, the Building Official shall immediately cause the building to be secured. In the event that the City of Tacoma secures the building, all costs incurred shall be assessed to the owner of the property.

2. Occupied Buildings.

If a building is occupied and determined by the City of Tacoma to be in violation of this chapter and

presents an immediate danger to the health, safety, and welfare of the occupants or the public, the building shall be ordered vacated by the Building Official, and the Building Official shall cause the building to be immediately secured from unauthorized third-party entry. In the event that the City of Tacoma secures the building, all costs incurred shall be assessed to the owner of the property.

3. Occupied Buildings which have been secured due to vandalism or other hazards.

Occupied buildings that have been secured due to vandalism or other hazards may remain secured for a period of twenty-one (21) calendar days while the owner obtains estimates for the repair of the damaged door(s), window(s), exterior wall(s) or other areas of the building which have been damaged due to hazards beyond the control of the owner. It shall be a violation of Section 2.01.090, if the owner has not made repairs within thirty (30) calendar days from the date of the Notice of Violation or negotiated a repair schedule.

C. Standards for Securing Buildings.

To secure a building, all doors, window openings, or other openings on floors accessible from grade shall be closed and locked, or shuttered to prevent third-party entry, to the satisfaction of the Building Official. (Ord. 26715 § 4; passed Oct. 17, 2000: Ord. 26380 § 1; passed Mar. 16, 1999: Ord. 15742 § 1-13; passed Nov. 13, 1956)

**2.01.100 — Residential Building Rental Registration Program.**

*Repealed by Ord. 27154*

(Ord. 27154 § 1; passed Oct. 21, 2003: Ord. 26715 § 5; passed Oct. 17, 2000: Ord. 26380 § 1; passed Mar. 16, 1999: Ord. 25560 § 1; passed Aug. 23, 1994: Ord. 15742 § 9; passed Nov. 13, 1956)

**2.01.??110 Recovery of Costs and Expenses**

A. Pursuant to RCW 35.80.030, the costs incurred for enforcement of the violation including incidental expenses may be billed to the owner for which a Notice of Violation of Derelict Building has been corrected, and shall become due and payable to the City of Tacoma no later than thirty (30) calendar days from the date of the invoice. The term “incidental expenses” includes, Pursuant to RCW 35.80.030, the costs incurred by the City relating to the enforcement of TMC 2.01.060.E and G, may be recovered against the owner of the property and shall become due no later than 30 calendar days from the date of the

Form  
Form  
Form

invoice. "Costs" include, but are not limited to, personnel costs, both direct and indirect, including attorney's fees; costs to secure the building; costs incurred in documenting the violation; hauling, storage and disposal expenses; filing fees and actual expenses in costs of the City in preparing notices, specifications and contracts in accomplishing and/or contracting and inspecting the work; the costs of any required printing or mailing; and any and all costs of collection.

B. In addition to a lien, the debt shall be collectable in the same manner as any other civil debt owing to the City and the City may pursue collection of the cost of any abatement proceedings under this chapter by any other lawful means, including but not limited to, referral to a collection agency.

2.01.??120 Repeat Offenders

A. A repeat offender is defined as a property owner or tax parcel which has who has a confirmed non-compliance history, including any identical or similar violations similar violations of this chapter at the same site or on a different tax parcel, under the same ownership but caused by the same owner two ownership two (2) times within a twelve (12) month period. If an owner or tax parcel is found to be a repeat offender, he or she may be subject to an inspection fee equivalent to a re-inspection fee as defined in TMC 2.09.

All administrative reviews in regards to the re-inspection fee shall be as outlined in the appeal process for the Notice of Violation and shall be filed with the Building Official in the same manner.

Owner may appeal a re-inspection fee pursuant to TMC 2.01.060.F.5.

Note: Attorneys to look into LLC's

Form  
Form  
Form  
Form  
Form  
Form  
Form  
Form

|

Rec'd  
09.05.12  
TC

Magelssen Short Plat and Historical Designation

Owner: Carol Magelssen  
1239 E 54<sup>th</sup>  
Tacoma, WA 98404  
Parcel #0320222126  
September 4, 2012

Rep: Dan Swanberg  
424 29<sup>th</sup> St NE  
Puyallup, WA 98372

To: Reuben McKnight  
Historic Preservation Officer  
City of Tacoma  
747 Market St  
Tacoma, WA 98402

To whom it may concern:

Here is a brief description of our needs,

After the Historical Designation of the Magelssen Property, the owner (Carol) has had to deal with some personal, health and financial needs. After much thought, we have concluded the best way to achieve her needs is to Short Plat her property so she can sell the newly created lots and retain her home and structures as the original parcel.

We hope to create 3 new lots while retaining the Historical Designation on her own Parcel. We also need to know if the Short Plat process is approved, will the owners of the newly created lots have the opportunity to further develop their land? This will have a significant impact on the value of the existing property.

I have attached some sketches of the short plat designs that we hope will meet the requirements of the City and the Owner of the property.

Thank you for giving us this opportunity to explain our position. We look forward to meeting with you.

Sincerely,


Dan

Dan Swanberg, Owner/General Manager  
Home Team Northwest Construction, LLC 253-221-3829

Rec'd 09.05.12  
Page 1 of 5


# OPTION # 1

- LOT # 1 - 60,000 SQ FT
- # 2 - 46,200 " "
- # 3 - 46,200 " "
- # 4 - 76,200 " "

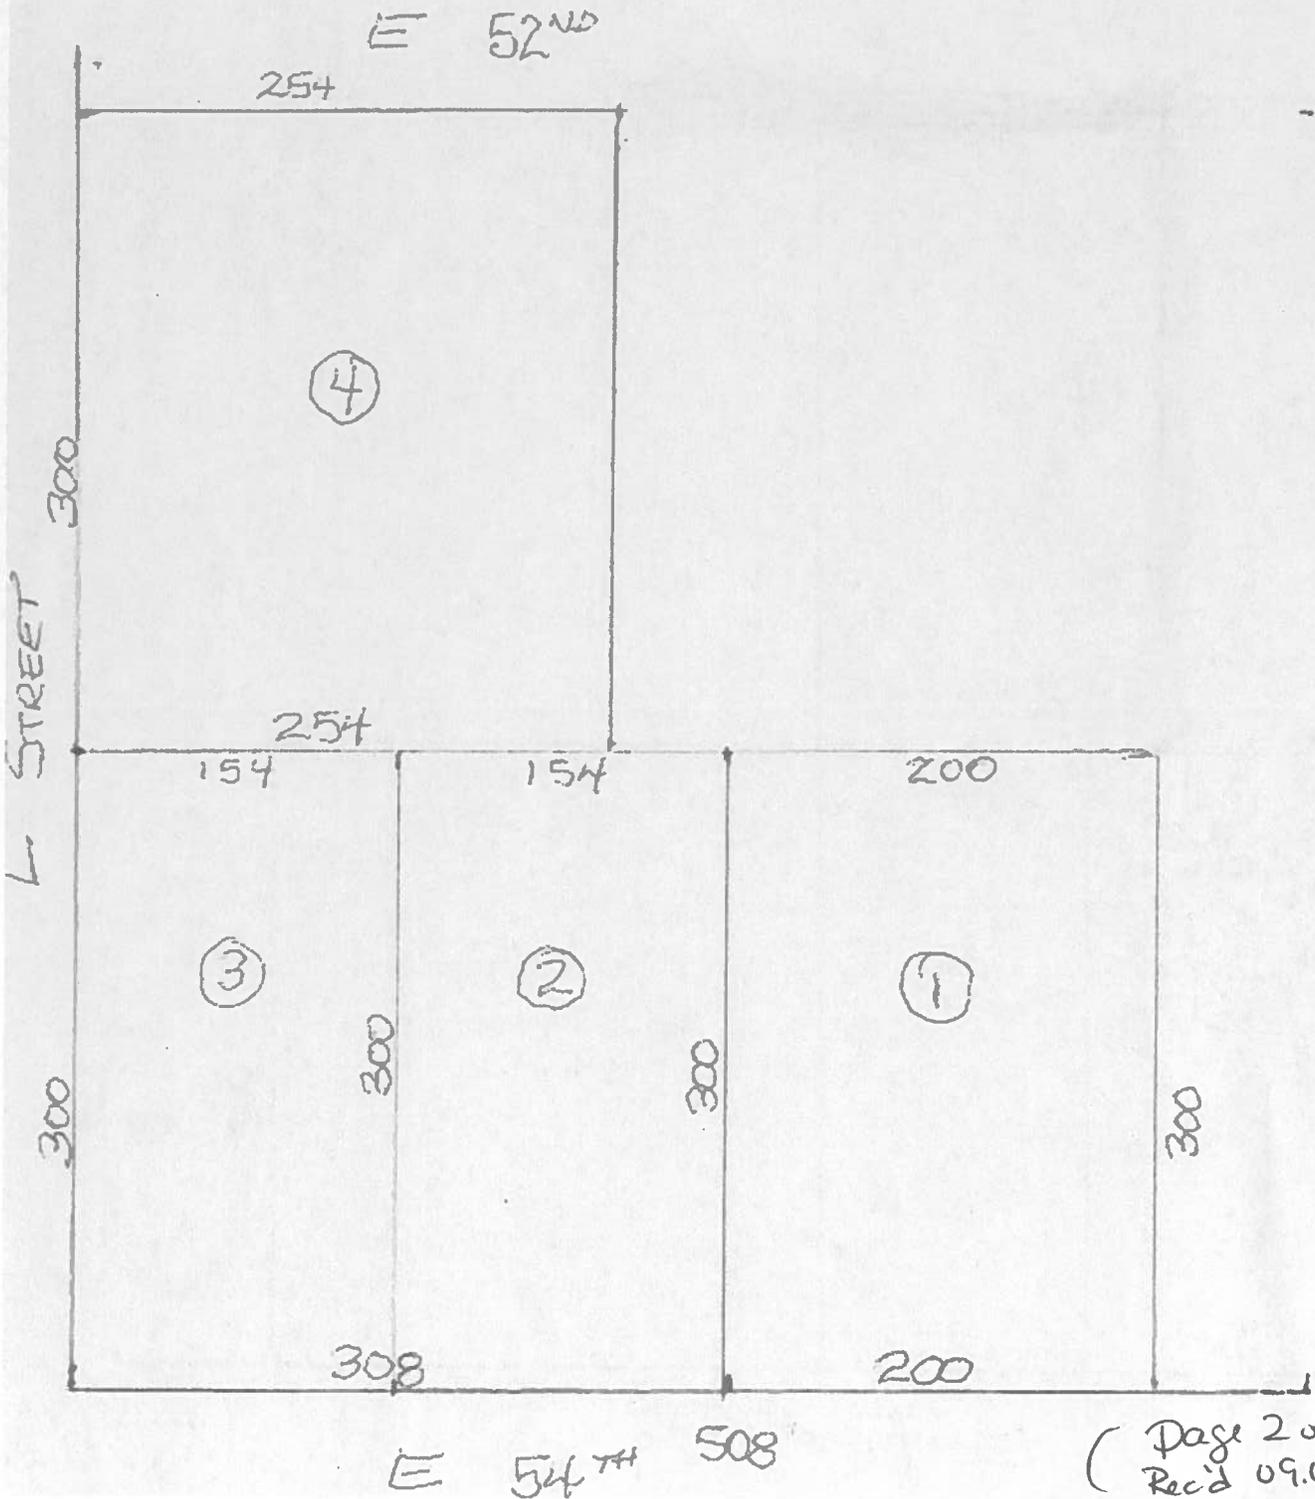


# CREATIVE LOT DESIGN

- LOT # 1 - 20 SQ FT
- # 2 - 46,200 " "
- # 3 - 46,200 " "
- # 4 - 50,800 " "
- FARMLAND - 25,400 " "

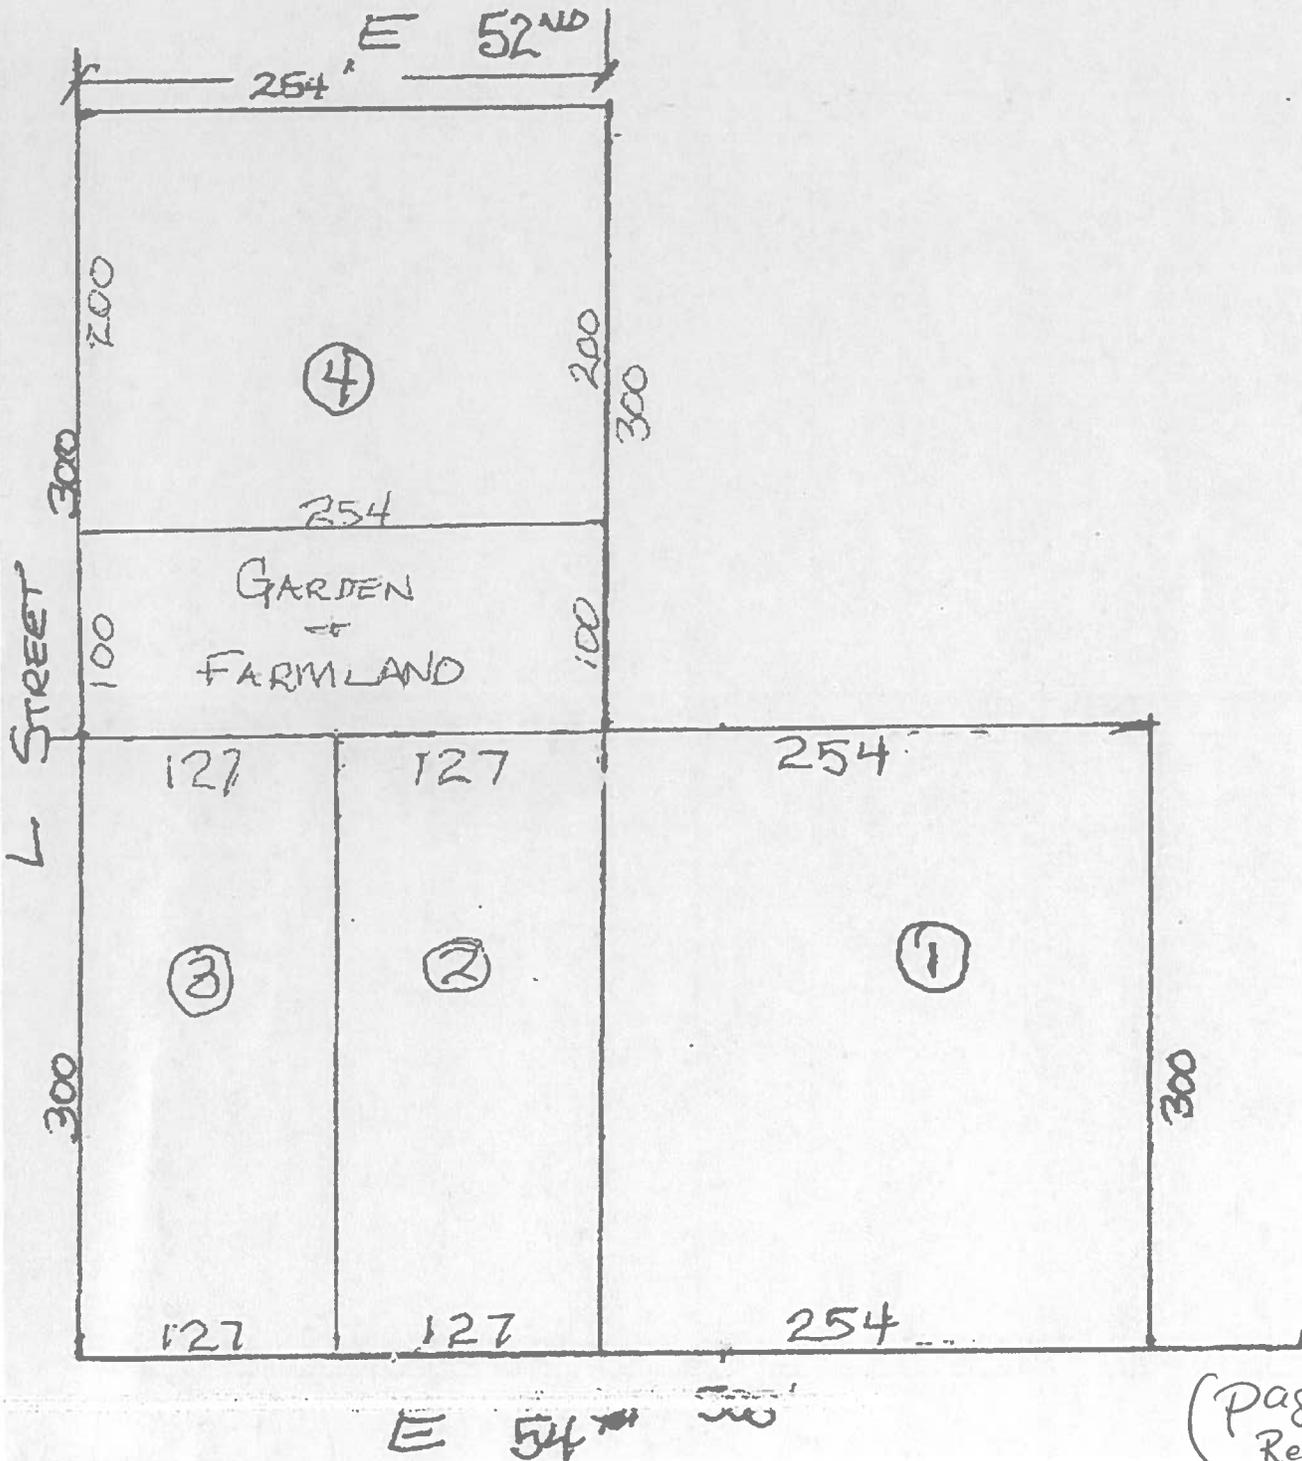


# OPTION #2

LOT # 1 - 76,200 SQ FT  
# 2 - 38,100 " "  
# 3 - 38,100 " "  
# 4 - 76,200 " "

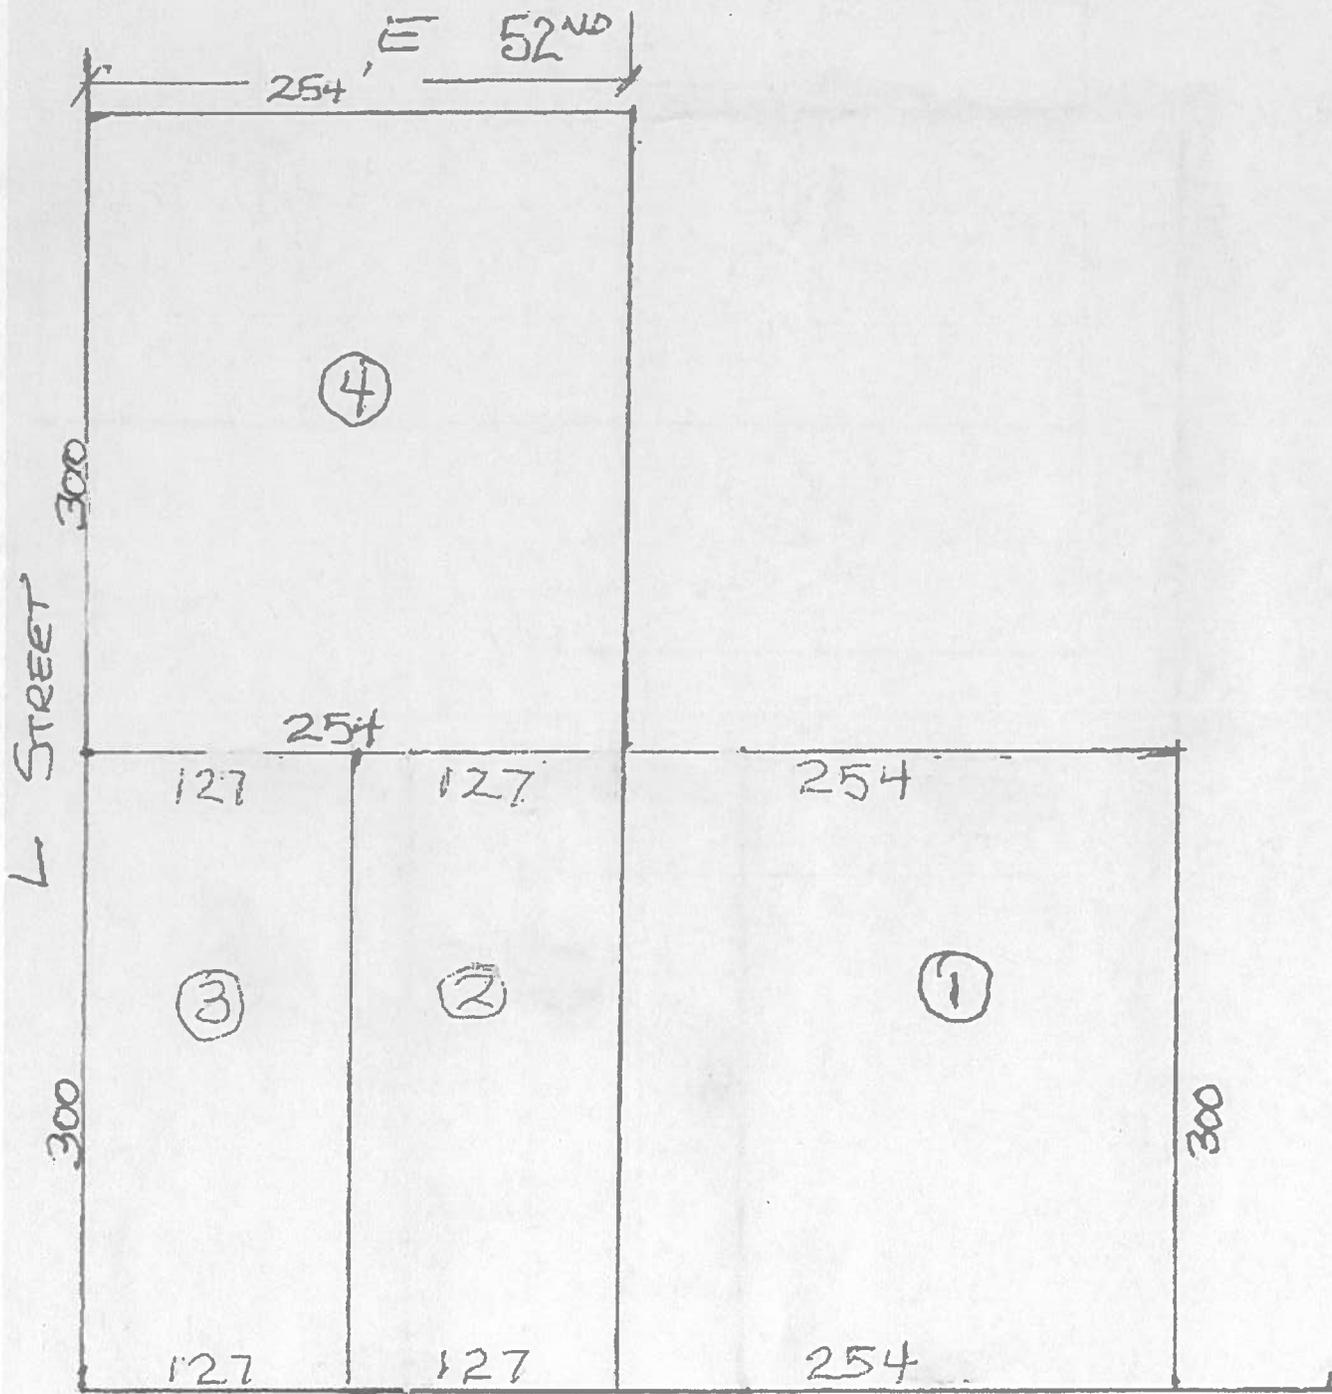


E 54th 508'

"L STREET"

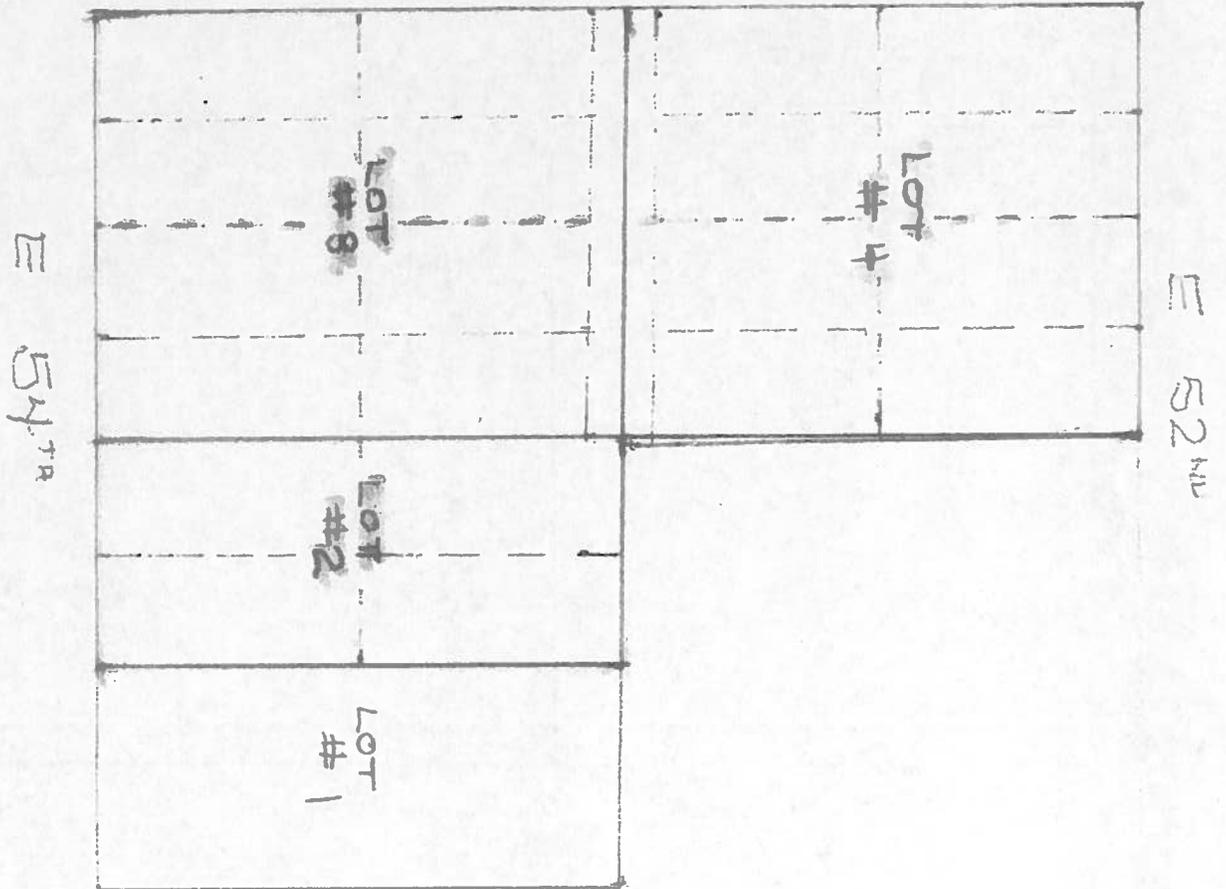

# 1239 E 54th St

## J.M. Hendrickson Homestead

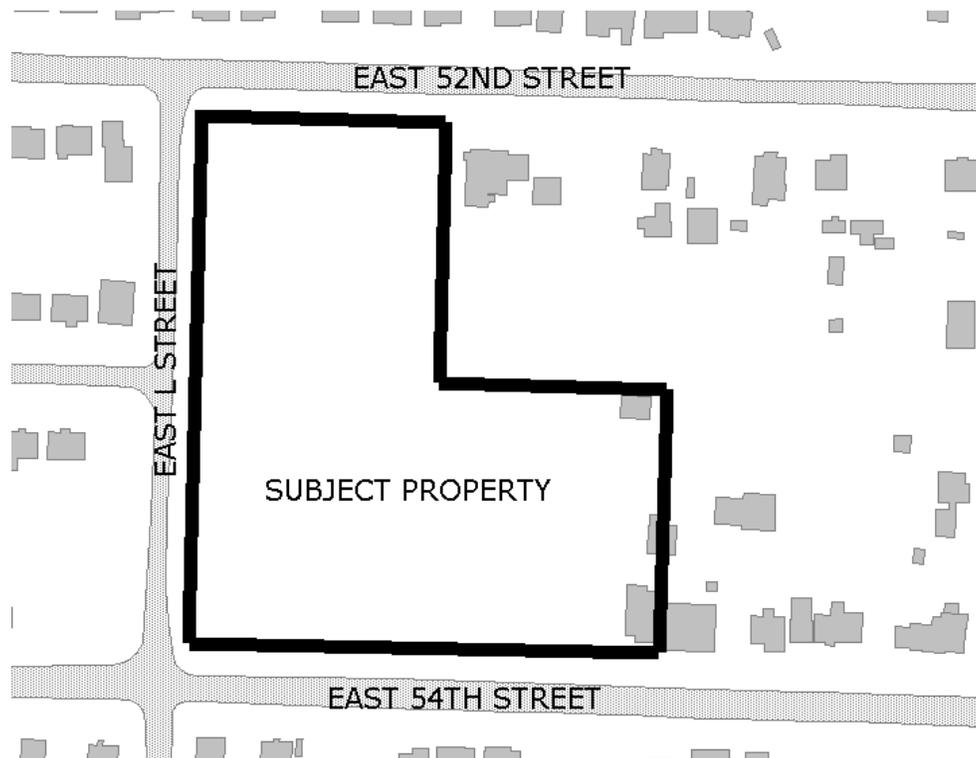

### **13.07.055 Rescission of Landmarks Designation**

A. The City Council, Landmarks Preservation Commission, or the owner of property listed on the Tacoma Register of Historic Places may request removal of said property from the Register.

B. Such a request shall be made in writing to the Landmarks Preservation Commission, and shall include a statement of the basis for removal from the Register, based on the following criteria:

1. Economic hardship. The property cannot be maintained as a City Landmark without causing undue economic hardship to the owner.

a. This criterion shall only apply if a determination of economic hardship has been made by the Commission. See Economic Hardship, Section 13.05.046.

b. This criterion shall not apply in the case of proposed demolitions that have not been before the Commission through the normal Demolition Review process.

2. Catastrophic Loss. Due to circumstances beyond the control of the owner, such as fire, earthquake, or other catastrophic occurrence, the property has been damaged to the extent that its historic character has been irrecoverably lost.

3. Procedural Error. A property may be removed from the Historic Register if there is clear evidence that the Landmarks Preservation Commission or City Council committed any procedural errors during the consideration of the designation. This criterion does not include dissenting opinions regarding the findings or interpretations of the Commission during the designation process or the Commission's application of the Criteria for Designation.

C. The Landmarks Preservation Commission may itself also request removal of a property from the Historic Register in instances where:

1. The significant structure on the property no longer exists, due to a previous demolition.

2. The Commission finds that retaining the property on the Historic Register does not further the goals and objectives of this Chapter and the Preservation Plan.

D. When a request for removal from the Historic Register is received, or when the Landmarks Preservation Commission resolves to request removal of a property from the Historic Register, the Commission shall:

1. Set a date for Public Hearing within 60 days.

2. Send written notice via mail of the date, time and location of the Public Hearing. This notice shall be given not less than 14 days prior to the meeting to all taxpayers of record of the subject property, as indicated by the records of the Pierce County Assessor, and taxpayers of record of properties within 400 feet of the subject property. For properties proposed for removal under Criterion C1, a public hearing is not required.

3. Following the public hearing, the Commission may leave the comment period open for up to 10 days.

4. At its next meeting, following the close of the comment period, the Commission may, by a vote of a majority of the quorum, find that the property meets one or more of the criteria for removal from the historic register and recommend the same to City Council, find that the property does not meet any of the criteria and reject the request, or it may defer the decision if additional information is required. The Commission shall set forth findings of fact for its decision.

5. If the Commission finds that the property appears to meet the criteria for removal from the Historic Register, and recommends the property for removal from the Historic Register, the Historic Preservation Officer shall transmit the Commission's recommendation to the City Council for its consideration within 30 days of the decision. (Ord. 27995 Ex. H; passed Jun. 14, 2011)

# Landmarks Preservation Commission

## Tacoma Community and Economic Development Department



747 Market Street ♦ Room 1036 ♦ Tacoma WA 98402-3793 ♦ 253.591.5220

### TACOMA REGISTER OF HISTORIC PLACES NOMINATION FORM

This form is required to nominate properties to the Tacoma Register of Historic Places per Tacoma Municipal Code 13.07.050. Type all entries and complete all applicable sections. Contact the Historic Preservation Officer with any questions at 253-591-5220.

#### PART 1: PROPERTY INFORMATION

<b>Property Name</b>	
Historic <u>The J. M. Hendrickson Homestead</u>	Common <u>The Magelssen Residence</u>
<b>Location</b>	
Street Address <u>1239 East 54th Street, Tacoma, Washington</u>	Zip <u>98404</u>
Parcel No(s). <u>0320222126</u>	Legal Description and Plat or Addition: Section 22 Township 20 Range 03 Quarter 24 COM INTER E LI NW & N LI OF E 56TH ST TH N 660 FT TH W 254 FT TO POB TH N 300 FT TH W 254 FT TH N 300 FT TH W 254 FT TH S 600 FT TH E 508 FT TO POB EXC RDS ALSO EXC THAT POR CYD TO CY OF TACOMA PER AFN 2330542 OUT OF 2-010 SEG 2009-0445 12/12/08CL
<b>Nominated Elements</b>	
Please indicate below significant elements of the property that are included in the nomination by checking the appropriate box(es) below. These elements should be described specifically in the narrative section of this form.	
<input checked="" type="checkbox"/> Principal Structure	<input checked="" type="checkbox"/> Site
<input type="checkbox"/> Historic Additions	<input checked="" type="checkbox"/> Historic Landscaping, Fencing, Walkways, etc.
<input checked="" type="checkbox"/> Ancillary Buildings/Outbuildings	<input type="checkbox"/> Interior Spaces/Other (inventory in narrative)
<b>Owner of Property</b>	
Name <u>Carol M. Magelssen</u>	
Address <u>1239 East 54th Street</u>	City <u>Tacoma</u> State <u>WA</u> Zip <u>98404</u>
Is the owner the sponsor of this nomination?	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
<b>Form Preparer</b>	
Name/Title <u>Mark Lawrence McIntire AIA NCARB LEED</u>	Company/Organization <u>Gittens   McIntire</u>
Address <u>934 Broadway   Suite 100</u>	City <u>Tacoma</u> State <u>WA</u> Zip <u>98402-4419</u>
Phone <u>253   759.1621</u>	Email <u>mlm@gittensmcintire.com</u>
<b>Nomination Checklist—Attachments</b>	
<input checked="" type="checkbox"/> \$100 Filing Fee (payable to City Treasurer)	<input type="checkbox"/> Continuation Sheets
<input checked="" type="checkbox"/> Site Map (REQUIRED)	<input type="checkbox"/> Historical Plans
<input checked="" type="checkbox"/> Photographs (REQUIRED): please label or caption photographs and include a photography index	<input type="checkbox"/> Other (please indicate): _____ _____
<input checked="" type="checkbox"/> Last Deed of Title (REQUIRED): this document can usually be obtained for little or no cost from a titling company	
	<b>FOR OFFICE USE</b> Date Received _____ Fee Paid _____

11/2008

Nominations to the Tacoma Register of Historic Places are processed according to the procedures and standards described in TMC 1.42 and 13.07. Submittal of a nomination form does not obligate the City to place a property on the Register or to extend financial incentives to a property owner. Documents submitted become public record. Additional requirements may be imposed by other City, state or federal regulations.

**Narrative (continued)**

**PART 2: PHYSICAL DESCRIPTION**

**Extent of Changes**

Please summarize the changes to plan, original cladding, windows, interior and other significant elements by selecting the choices below. If the property has been previously documented, these may be indicated on the Washington State Historic Property Inventory Form. These changes should be described specifically in the narrative section of this form.

	Original Materials Intact			Original Materials Intact	
Plan (i.e.: no additions to footprint, relocation of walls, or roof plan) House Front Porch infill 1955	Yes <input checked="" type="checkbox"/>	No <input type="checkbox"/>	Interior (woodwork, finishes, flooring, fixtures)	Yes <input checked="" type="checkbox"/>	No <input type="checkbox"/>
Original cladding	Yes <input checked="" type="checkbox"/>	No <input type="checkbox"/>	Other elements	Yes <input checked="" type="checkbox"/>	No <input type="checkbox"/>
Windows (no replacement windows or replacement sashes)	Yes <input checked="" type="checkbox"/>	No <input type="checkbox"/>			

**Physical Description Narrative**

Describe in detail the present and original (if known) physical appearance, condition and architectural characteristics (use continuation sheets if necessary).

The Hendrickson Family Homestead is a 1922 vernacular house and garage on 3.78 acres of land with a barn constructed in 1924. A chicken coop built at the same time adjacent the barn collapsed by 1964. The lot is bounded by East 52nd Street on the north, East L Street on the west and with the house facing East 54th Street on the south, one-half block from East M Street. Originally, the neighborhood designation was Bismarck from the predominantly German and Scandinavian immigrants that populated the area and was changed after World War I to its present Hillsdale. The property was part of an unrecorded plat named the Sheridan Garden Tracts annexed by vote into the City in 1891, and was just a few hundred feet from the 1907 renegotiated Puyallup Reservation boundary. The adjacent plat additions, Ouimette and Metzler, and MacReady Heights on top of the hill were platted in 1908.

The only modifications to the original 1922 house are the rear shed-roofed kitchen-utility room extension added in 1933 and the front porch enclosure added in 1955. The garage was slightly modified with lean-toes on its east and north sides in the 1940's for additional covered storage. The barn, though weathered, is as it was built. Designed and constructed by John M. Hendrickson (the owner's grandfather), a Norwegian-Swedish immigrant and a Northern Pacific railroad engineer, the house, garage and barn are conventionally planned, constructed and finished, with the house and garage having reserved Craftsman inspired detailing common to the era. It is unclear whether the house plan is a stock plan, a modification of same, or whether it is an original plan fashioned from the numerous pattern books of the day. Uniform 4-inch-exposure cedar lapped siding clads the house and garage with bracketed barge boards, exposed rafter tails and beveled tongue-and-groove soffit. The house's mitered-corner lapped siding has a skirted bottom at the top of the horizontal board-formed concrete basement-foundation, approximately 2'-6" above grade. Window and door openings received a common projecting sill with flat cased surrounds and an understated crown molding on the head trim. Doors and windows are the original wood sash items.

The main roof of the house is a 5:12 pitched gable perpendicular to the street as is the garage. A single gabled dormer on the house roof faces west. Originally roofed with cedar shakes, the house and garage are now covered with asphalt composition shingles.

Though the interior of the house is not presented here for nomination, it is nevertheless intact with original finishes and most of the original fixtures. Considered a story and a half because the second floor's sloping ceiling is below 7-feet, this 1,800 SF four-bedroom house has all its original built-ins, cabinetry and millwork with few additions. A few interior photographs are included for illustrative purposes.

The barn's cedar lap siding, corner boards, and trim have never been painted with only the large double-barn-door painted white. The original cedar-shake roof is a 4:12 pitch.

The original fence enclosing the property was four barbed wire strands on split timber posts. Along E. 54th Street a rail-fence was built in the 1960's. Chain-link fencing replaced the barbed-wire in 1997.

Though the property is over-grown now, from the time of the barn's completion and until 1994, cows were kept and by their presence maintained the vegetation as a closely-cropped pasture as will be seen in photographs to follow.

No part of the structures have been modified since the mid-1950's.

**Narrative Continuation**

This page may be edited or copied as needed.  
Continued from page 2.



Street (South) Elevation



Rear (North) Elevation



Side (West) Elevation



Side (East) Elevation




Garage, South Elevation



Garage, West Elevation

**Narrative Continuation**

This page may be edited or copied as needed.  
Continued from page 3.

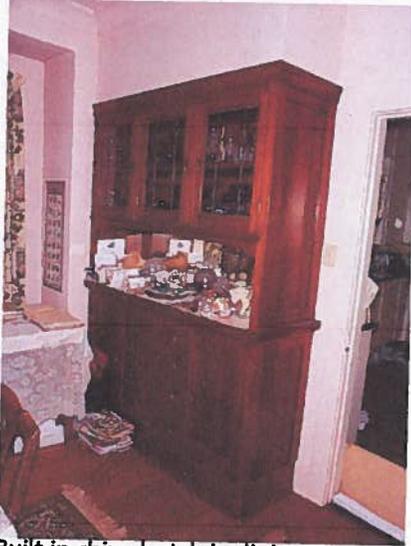

Built-in china hutch in dining room adjacent window seat; note original No. 1 white oak flooring with Swedish finish



Arched doorway into 1933 addition breakfast nook from kitchen, wall-mounted ironing board; note original marbled linoleum with black border; original light fixture




Leaded-glass tea service cabinet in breakfast nook; note glass hardware pulls which match the kitchen cabinets



Left: original boiler still intact  
Below: this radiator along with all others still in use



Original bedroom light fixture

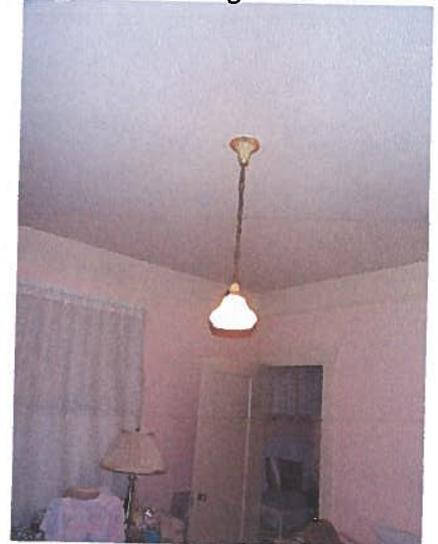

**Narrative Continuation**

This page may be edited or copied as needed.  
Continued from page 4.



Barn, South Elevation




Barn, West Elevation



1931 Aerial Photo, Hendrickson Homestead

**Narrative Continuation**

This page may be edited or copied as needed.  
Continued from page 5.

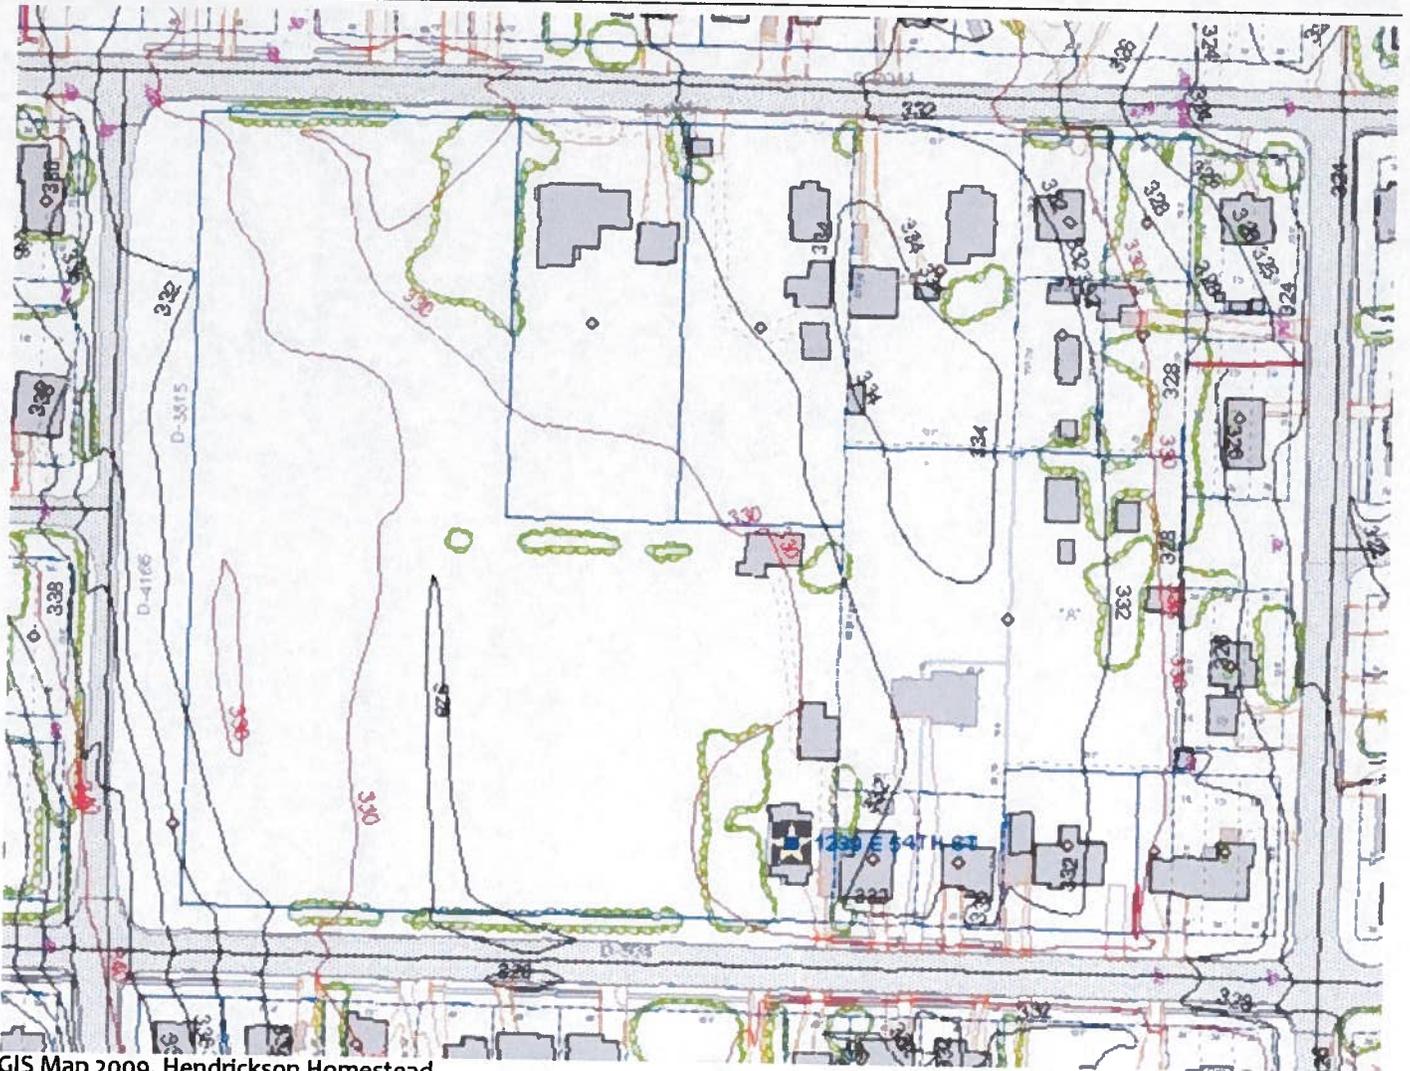

GIS Map 2009, Hendrickson Homestead

As evidenced by the 1931 aerial map and this 2009 GIS map, little has changed in the configuration of the property or its structures.



Janice, Ruth and Sarah Magelssen with calves  
Donner and Rudolph, Fall 1961



Calves Autumn and Big John with Ruth and Janice  
Magelssen, Fall 1961

**Narrative Continuation**


This page may be edited or copied as needed.  
 Continued from page 6.



1933, Barn and Chicken Coop

The Henderickson Homestead has remained within the family since its 1922 construction with the chain of title passing from J. M. and Sara (Ericson) Hendrickson to their children in 1944. Daughter and son-in-law, Helen Margaret (Hendrickson) Magelssen and Harold C. Magelssen in 1949 purchased the brother Floyd's interest in the property, with the Magelssen's oldest daughter Carol, receiving title in 2000. This family homestead, situated on the leeward side of upper McKinley Hill, has remained intact rather than go the way of most others throughout the City, which were bought, divided and developed starting from the founding of the Tacoma Land Company in 1873.

As will be discussed further in the following section, the story of this immigrant family's situation is not a new one in a nation of immigrants, but one that nevertheless does not tire of the telling.

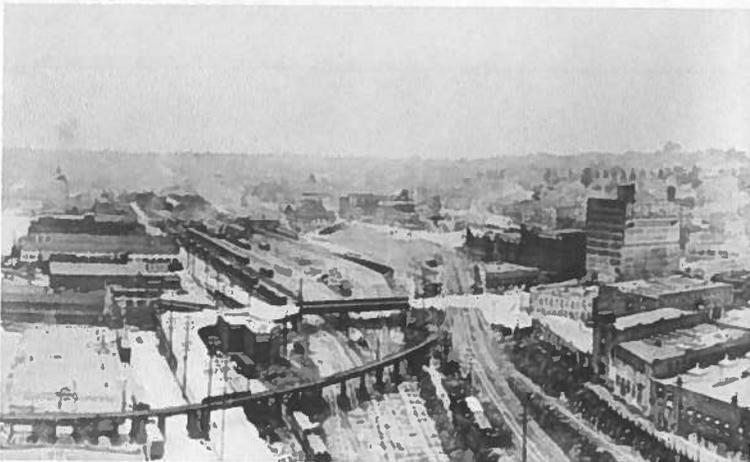

1922: As a reference, downtown Tacoma in the year the Henderickson Homestead was built. The photo is taken from above the 1100 block of Dock Street looking South. From the Sanberg building at the middle right, the Hendrickson's is approximately three miles south-by-southeast. Courtesy of The Library of Congress.



Here is the ANSWER to  
 How to  
 PLAN, FINANCE AND BUILD  
 YOUR HOME

**BETTER** built small houses—3 to 6 rooms—at lower cost from plans designed to eliminate building waste without sacrificing good looks—this was the ideal of the group of practicing architects who compiled the remarkable new home plan book, "How to Plan, Finance and Build Your Home."

This book and plan service is part of the national small home building movement originating with the Architects' Small House Service Bureau of Minnesota, Inc. and now being extended by the Architects' Small House Service Bureau of the United States, Inc. The United States Service Bureau has the endorsement of the Department of Commerce of the United States Government and the American Institute of Architects. The Minnesota group of architects compiled this book for the Northern Pine Association, which, jointly with the Minnesota Housing, from the Northern Pine Association of the United States Service Bureau, is interested in its distribution.

In recognizing the work of the Architects' Small House Service Bureau of the United States, Inc., Mr. Herbert Hoover, Secretary of the Department of Commerce, says:

"I have looked into the work of the Architects' Small House Service Bureau of the United States with its design and plan service and have examined its organization and construction program. The complete plans, specifications, dimensions and bills of materials will eliminate needless cost for local conditions and to use the best materials and climate water, especially adapted home building problems. The fact of credit by The American Institute of Architects should guarantee a high standard of service. It gives me pleasure to endorse this work and to urge you that the Department of Commerce will do all it can to cooperate with the Institute and the Bureau."

The book and plan may be obtained direct from either the Architects' Small House Service Bureau, Northwestern Division, Inc., or the Southern Pine Association. The book is sold for \$3.50 prepaid. The service includes providing working drawings, details, specifications, quantity survey forms of agreement, ready to use, at prices ranging from \$17.50 to \$25.00 depending upon the size of the house.

Right: March 1922 Popular Science advertisement for The Architect's Small House Service Bureau, Minneapolis, MN

Plan or Use  
 This Coupon: Southern Pine Association; The Architects' Small House Service Bureau  
 New Orleans, La. Northwestern Division, Inc. Minneapolis, Minn.

(Order either from The Southern Pine Association, New Orleans, La., or The Architects' Small House Service Bureau, 31 W. DuSable, 1933 Harvard Ave., South Minneapolis, Minn.)

I enclose \$3.50 for which please send me a copy of the book, "How to Plan, Finance and Build Your Home" Address: \_\_\_\_\_

### PART 3: HISTORICAL OR CULTURAL SIGNIFICANCE

#### Criteria for Designation

Tacoma Municipal Code recognizes six criteria of eligibility for inclusion on the Tacoma Register of Historic Places. Please select any that apply to this property, for which there is documentary evidence included in this nomination form.

- A Is associated with events that have made a significant contribution to the broad patterns of our history; or
- B Is associated with the lives of persons significant in our past; or
- C Embodies the distinctive characteristics of a type, period, or method of construction, or represents the work of a master, or possesses high artistic values, or represents a significant and distinguishable entity whose components may lack individual distinction; or
- D Has yielded or may be likely to yield, information important in prehistory or history; or
- E Is part of, adjacent to, or related to an existing or proposed historic district, square, park, or other distinctive area which should be redeveloped or preserved according to a plan based on a historic, cultural, or architectural motif; or
- F Owing to its unique location or singular physical characteristics, represents an established and familiar visual feature of the neighborhood or City.

#### Historical Data (if known)

Date(s) of Construction 1922 Other Date(s) of Significance 1955  
Architect (s) \_\_\_\_\_ Builder J. M. Hendrickson, Owner Engineer \_\_\_\_\_

#### Statement of Significance

Describe in detail the chronological history of the property and how it meets the criteria for the Register of Historic Places. Please provide a summary in the first paragraph (use continuation sheets if necessary). If using a Multiple Property Nomination that is already on record, or another historical context narrative, please reference it by name and source.

Tacoma, from its European-settler beginnings with Swede, Nicholas Delin's (Nicklaus Dahlen) 1852 sawmill and who later led others to the shores of Commencement Bay, to its development as a busy seaport with assistance from tugboats owned by Norwegians Andrew and Thea Foss, owes much to its Scandinavian settlers. Rather than recite a catalog of Tacoma's Scandinavian pioneers and their achievements, suffice to say a large portion of the earliest land claims including Delin's original property were staked by Swedish and Norwegian immigrants. Owing to a culture valuing education and self-sufficiency coupled with cultural handicraft skills relavently adapted to the Pacific Northwest and the embrace of technological advances, Scandinavians have left their imprint on Tacoma's cultural and physical landscape.

John M. Hendrickson, though of Swedish descent was born in Norway in 1888 and immigrated to the United States in 1905, making his way to the immigrant community of Brooten, Minnesota near St. Cloud and sharing a household with other recent immigrants. Finding employment as a engineer with the Northern Pacific Railroad, promotions through the Railroad brought J. M. Hendrickson to Tacoma, NP's western terminous before 1913. Here he met his future wife, Sara Ericson.

Sara Ericson was born in Näs, Dalarna, Sweden in 1889, immigrating to the United States in 1910. The 1910 Census places Sara in the 7th Ward of Tacoma (Hilltop south of Wright Park), housekeeping with her sisters Britta and Marie in the Hultman household, cousins to the Ericson sisters. J. M. and Sara were married at the Swedish Evangelical Lutheran Church (First Lutheran) on June 15, 1915.

According to the original deed, the land was purchased for \$10 on the 3rd of June 1921 from Traders Trust Company of Tacoma with the building permit announcement for the house and garage appearing in the Tacoma Daily Ledger on 13 August 1922. J.M. Hendrickson constructed the house, garage and later the barn by himself with possible help from Sara's relations and J. M.'s work associates. Their children, Helen Margaret (1916-2003) and Floyd (1918-1965) are part of the chain of ownership for the Hendrickson Homestead. Sara (Ericson) Hendrickson was layed to rest in April of 1940 with J. M. to follow in February of 1944. Through the will, the Homestead was deeded to Floyd and Helen Margaret jointly. In 1949, Helen Margaret and her husband Harold C. Magelssen (1906-1994) purchased Floyd's interest in the property.

Helen Margaret (Hendrickson) Magelssen attended Sheridan Elementary, Stewart Middle School and received a diploma from Lincoln High School in 1935, followed by graduation from Washington State University 1940. She was recruited from college to teach at a school for disabled children on Long Island, NY and remained there for one year. After returning to Washington, she was employed by the Everett School District where she met her future husband from Utsalady, Camano Island, WA, Harold Christian Magelssen. (His parents: father, Thorbjorn born in Norway, mother, Ida Wangsness born in North Dakota of Norwegian-immigrant parents)

Harold Magelssen was educated at the New Whatcom Normal School, after 1937 known as Western Washington College of Education (WWU) in Bellingham, WA. He applied his teaching skills at Snohomish County School District and in the Navy before terminating his commission at the end of WWII and later at the Dunwoody Institute in Minneapolis, MN for one year and again when returning to Washington State at the Tacoma Vocational School (now known as Bates Technical Institute) from which he retired. Harold and Helen Margaret were married February 24th, 1945 in New York, NY by Norman Vincent Peale and produced five daughters of whom three\* became teachers like their parents: Carol\*, Sarah\*, Margaret, Ruth\*, and Janice. Carol M. Magelssen, the applicant, is a retired middle school teacher from Tacoma Public Schools.

Criteria A: Is associated with events that have made a significant contribution to the broad patterns of our history:

The Hendrickson Homestead represents a microcosm of the immigrant narrative. In this instance, the third wave of Scandinavian immigration. New Sweden was the first settlement name dating from the late 1620's of the area along the Atlantic Coast between Chesapeake Bay and the Hudson River, encompassing the present states of Maryland, Delaware and New Jersey, being incorporated into New Netherlands in 1633. This was the first wave. The second wave began with the loosening of immigration restrictions from the 1830's to the 1850's coinciding with the expanding industrial revolution and push westward, settling many in the upper mid-West from Chicago to North Dakota. The second wave was precipitated by droughts and crop failures in northern Europe. The third wave was an echo of the second due in part to poor economic conditions in Europe from the 1880's to WWI. This wave of Scandinavian immigrants rode the rails to the West Coast where native skills in fishing and timber were still much in demand, but with more assimilated individuals finding employment in commerce or the professions. In all waves, new immigrants sought to recreate the home they had known in the old country. For many immigrants the small self-sufficient homestead (hemman in Swedish, hjemstedet in Norwegian) represented what they had known and desired to recreate. With rapid urbanization beginning in the late 19th Century, many of the small farms and hamlets within and around the periphery of cities and towns were replatted into smaller lots to make way for development. The Hendrickson Homestead has survived intact due to the industry of the family that founded it and its location in a secluded swath between the edge of urbanization and the Reservation.

Criteria C:

Embodies the distinctive characteristics of a type, period, or method of construction, or represents the work of a master, or possesses high artistic values, or represents a significant and distinguishable entity whose components may lack individual distinction:

Vernacular house building has been often overlooked in historical surveys as not conforming to a given typology or house style, or for not meeting a preconceived aesthetic. With construction materials having been in mass production since the late 18th Century, vernacular building became the normal method of construction rather than the exception. This being said, by inference, vernacular architecture is a more authentic artifact of study with regard to an inhabitant's response to geography, site, ethnicity and use of building materials and techniques for a given era and locale than are revivalist aesthetic structures designed for rather than built by the inhabitants themselves. Vernacular architecture became the 20th Century's modernist ideal inside-out assemblage of mass-produced materials organized around a conveniently aligned-room arrangement to maximize comfort and sanitation.

As stated previously, it is unclear given the house plan and exterior appearance the exact origin of the design. The house bears little resemblance to common mail-order homes of the age by Sears, Montgomery Ward or any of the regional house plan and pre-fabrication publications. J. M. Hendrickson was an engineer trained in heavy construction in an age awash in publications about house construction like *Carpentry and Building*, *The Building Age*, *Pencil Points*, *The White Pine Series* and *House Beautiful*. Likewise, Sara (Ericson) Hendrickson would have had access to the women's magazines of the era which wrote exhaustively on space planning, modern appliances and home accoutrements. It is likely that the house, garage and barn were a synthesis of homes they had lived in or were acquainted with through experience or publication. The house having modest adornment, though quality in material and workmanship, is very much of the age and ethnicity of which it was built, with the garage seeming to belong to an era before WWI as it was used initially as a stable until the timelessly utilitarian barn was built two years later.

The Hendrickson Homestead represents an authentic response to geography, site, ethnicity and the use of building materials and techniques for its time and the re-created environment of its inhabitants.

Criteria F:

Owing to its unique location or singular physical characteristics, represents an established and familiar visual feature of the neighborhood or City:

The Hendrickson Family Homestead has been a working landscape with garden and livestock for most of its existence (until 1994) which harkens to our immigrant and pioneer pasts. Having been built and sustained within an urban environment, five blocks from the streetcar line running on McKinley Avenue between 1905 and 1955, two blocks from the transit line on Portland Avenue, is what distinguishes this property as exceptional, particularly surviving through the post-WWII era when Levittown-type development was springing up around it. Interesting to note as an aside, urban agriculture has regained a currency in sustainability thinking which is modeled on many of the notions found in utopian Northern European Garden Communities of the late 19th and early 20th Centuries.

The Hendrickson's is a landscape within the landscape, an echo of a still visible immigrant past.

## Bibliography

Bergman, Hans. History of Scandinavians in Tacoma and Pierce County. self-published, Tacoma, WA 1926

Gottfried, Herbert. American vernacular buildings and interiors, 1870-1960. W. W. Norton & Company, New York, NY, 2009

Hunt, Herbert. History of Tacoma. S. J. Clarke Publishing Company, Chicago, IL, 1916

Building Permit, Tacoma Daily Ledger, August 13, 1922, page B4.

Obituary, Sara M. Hendrickson, Tacoma News Tribune, April 11, 1940, page 13.

Obituary, John M. Hendrickson, Tacoma News Tribune, February 7, 1944, page 13.

United States Federal Census, 1910.

When recorded return to:  
Evelyn M. Zeller  
10900 NE 8<sup>th</sup> Street, Suite 900  
Bellevue, WA 98004

For reference only, not for re-sale.

**QUITCLAIM DEED**

Grantor(s): (1) Helen Margaret Magelssen (Margaret Helen Magelssen, nee Hendrickson) (2) \_\_\_\_\_  
Grantee(s): (1) Carol M. Magelssen (2) \_\_\_\_\_  
Additional Grantor(s) on pg. \_\_\_\_\_ Additional Grantee(s) on pg. \_\_\_\_\_  
Legal Description (abbreviated): COM. INTER E LI NW & N LI OF E 56<sup>th</sup> ST TH N 660 FT TH W 254 FT TO POB TH N 300 FT TH W 254 FT TH N 300  
Additional legal(s) on page \_\_\_\_\_  
Assessor's Tax Parcel No. 032022 201 0

The GRANTOR, HELEN MARGARET MAGELSSSEN, who acquired title as MARGARET HELEN MAGELSSSEN, nee HENDRICKSON, and who is the surviving spouse owner per community property agreement with Harold Christian Magelssen, Deceased, recorded previously in the records of the Pierce County Auditor, for and in consideration of love and affection, conveys and quitclaims to CAROL M. MAGELSSSEN, a single woman, to be her sole and separate property, the following described real property and improvements thereon, commonly known as 1239 East 54<sup>th</sup> Street, Tacoma, Washington 98404, situated in the County of Pierce, State of Washington, together with all after acquired title of the grantor therein, legally described as:

SEE EXHIBIT "A" ATTACHED HERETO AND BY THIS REFERENCE INCORPORATED HEREIN

Dated: March 28, 2000

Helen Margaret Magelssen  
HELEN MARGARET MAGELSSSEN

By: Carol M. Magelssen  
CAROL M. MAGELSSSEN,  
Her Attorney In Fact

(Acknowledgment on page 2)

Magelssen Quitclaim Deed (Tacoma Property) - Page 1

ETN: 1024990 3-28-2000  
Excise Tax Collected: \$0.00  
Affidavit Processing Fee: \$2.00  
Cathy Pearsall-Stipek CPO Pierce County Auditor  
BY: LISA DRURY

200003280360

DURABLE POWER OF ATTORNEY

STATE OF WASHINGTON )  
 ) ss.  
COUNTY OF Pierce )

I certify that I know or have satisfactory evidence that **CAROL M. MAGELSSSEN** is the person who appeared before me, and said person acknowledged that she signed this Quitclaim Deed as attorney in fact for the Principal, **HELEN MARGARET MAGELSSSEN**, and acknowledged to me that she signed this Quitclaim Deed as the free and voluntary act of the said Principal for the uses and purposes mentioned therein, and that she was authorized to execute this Quitclaim Deed pursuant to Durable Power of Attorney dated February 15, 1991, a certified copy of which is attached hereto and is to be recorded concurrently with this Quitclaim Deed, and the Revised Code of Washington (RCW) section 11.94.050(2).

Dated : March 28 2000.



Evelyn M. Zeller  
(Signature)

Evelyn M. Zeller  
(Name printed or stamped)

NOTARY PUBLIC in and for the State of  
Washington, residing at King County.  
My appointment expires 1/27/2001.

For reference only, not for re-sale.

UNRECORDED

**EXHIBIT A**

Beginning at a point where the East line of the South half of the Northwest quarter of Section twenty-two (22), in Township twenty (20), North, Range three (3) East, W.M. intersects the North line of the East 56<sup>th</sup> Street, running North 660 feet, thence West 254 feet to the true point of beginning; thence North 300 feet parallel with East line of said Section twenty-two (22), thence West 127 feet parallel with the North line of East 56<sup>th</sup> Street, thence North 300 feet parallel with the East line of said Section twenty-two (22), thence West 381 feet parallel with the North line of East 56<sup>th</sup> Street, thence South 600 feet parallel with the East line of said section twenty-two (22), thence East 508 feet to the true point of beginning, being tracts 1, 2, 3, 7, 8, 9, and 10 as shown on the unrecorded plat of Sheridan Garden tracts,

Situated in the County of Pierce, State of Washington.

For reference only, not for re-sale.

UNRECORDED

A PORTION OF THE SE 1/4 OF THE NW 1/4 OF SEC. 22,  
TWP 20 N., RGE 3 E., W.M., PIERCE COUNTY, WA.

CALCULATED  
NE COR. S. 1/2  
NW 1/4 SEC. 22

FIND. SURFACE  
BRASSISE

5.07'

0 60 120  
SCALE: 1" = 60'



**DESCRIPTION**

BEGINNING AT A POINT WHERE THE EAST LINE OF SOUTH HALF OF THE NORTHWEST QUARTER OF SECTION TWENTY-TWO (22) IN TOWNSHIP TWENTY NORTH RANGE THREE EAST MEETS THE EAST LINE OF SECTION TWENTY-TWO (22) IN TOWNSHIP TWENTY NORTH RANGE THREE EAST THENCE NORTH 300 FEET TO THE TRUE POINT OF BEGINNING THENCE WEST 224 FEET TO THE EAST LINE OF EAST 54TH STREET THENCE WEST 300 FEET PARALLEL WITH THE NORTH LINE OF EAST 54TH STREET THENCE WEST 300 FEET PARALLEL WITH THE EAST LINE OF EAST 54TH STREET THENCE WEST 300 FEET PARALLEL WITH THE EAST LINE OF EAST 54TH STREET THENCE SOUTH 800 FEET PARALLEL WITH THE EAST LINE OF EAST 54TH STREET THENCE EAST 508 FEET TO THE TRUE POINT OF BEGINNING BEING TRACTS 12A, 77A, AND 10, AS SHOWN ON THE UNRECORDED PLAT OF SWE-DOWN GARDEN TRACTS.

EXCEPT THE FOLLOWING:  
BEGINNING AT A POINT 30 FEET SOUTH AND 30 FEET WEST OF THE NORTHEAST CORNER OF THE NORTHWEST QUARTER OF SECTION 22, TOWNSHIP 20 NORTH, RANGE 3 EAST TO THENCE SOUTH 300 FEET THENCE WEST 127 FEET THENCE NORTH 300 FEET TO THE POINT OF BEGINNING, RECORDS OF PIERCE COUNTY, STATE OF WASHINGTON.


**LEGEND**

- FOUND MONUMENT AS NOTED
- FOUND CORNER AS NOTED
- SET 1/2" REBAR & CAP US 19822
- SET 2x2" HUB W/ LAM/ MARKED PROPERTY LINE

**NOTES:**

1. FIELD WORK PERFORMED AND MONUMENTS SET IN OCTOBER OF 1993.
2. INSTRUMENT TRANSFERRED WITH 11-1993 TOTAL STATION THEODOLITE. FINAL RESULTS MEET OR EXCEED CURRENT TYPICAL STANDARDS CONTAINED IN W.A.C. 165-130-000.
3. REFERENCE: RECORDS OF SURVEY 491, 6402240228 RECORDS OF PIERCE COUNTY, WASHINGTON.
4. 0.05% OF BEARING ASSUMED
5. THE EXCEPTION IN THE LEGAL DESCRIPTION SHOWN HEREIN IS FROM A REVISION TO THE DEED RECORDED UNDER APL 8807280282. IN REVISIONING THIS DEED, THE SURVEYOR HAS DETERMINED THAT A TYPOGRAPHIC ERROR WAS CREATED. THE REVISIONING BEING A REVISION AT A POINT 9 FEET SOUTH AND 30 FEET WEST OF THE POINT OF BEGINNING AT A POINT 30 FEET SOUTH OF THIS WOULD BE IN HARMONY WITH SURROUNDING PARCELS.

For reference only, not for re-sale.

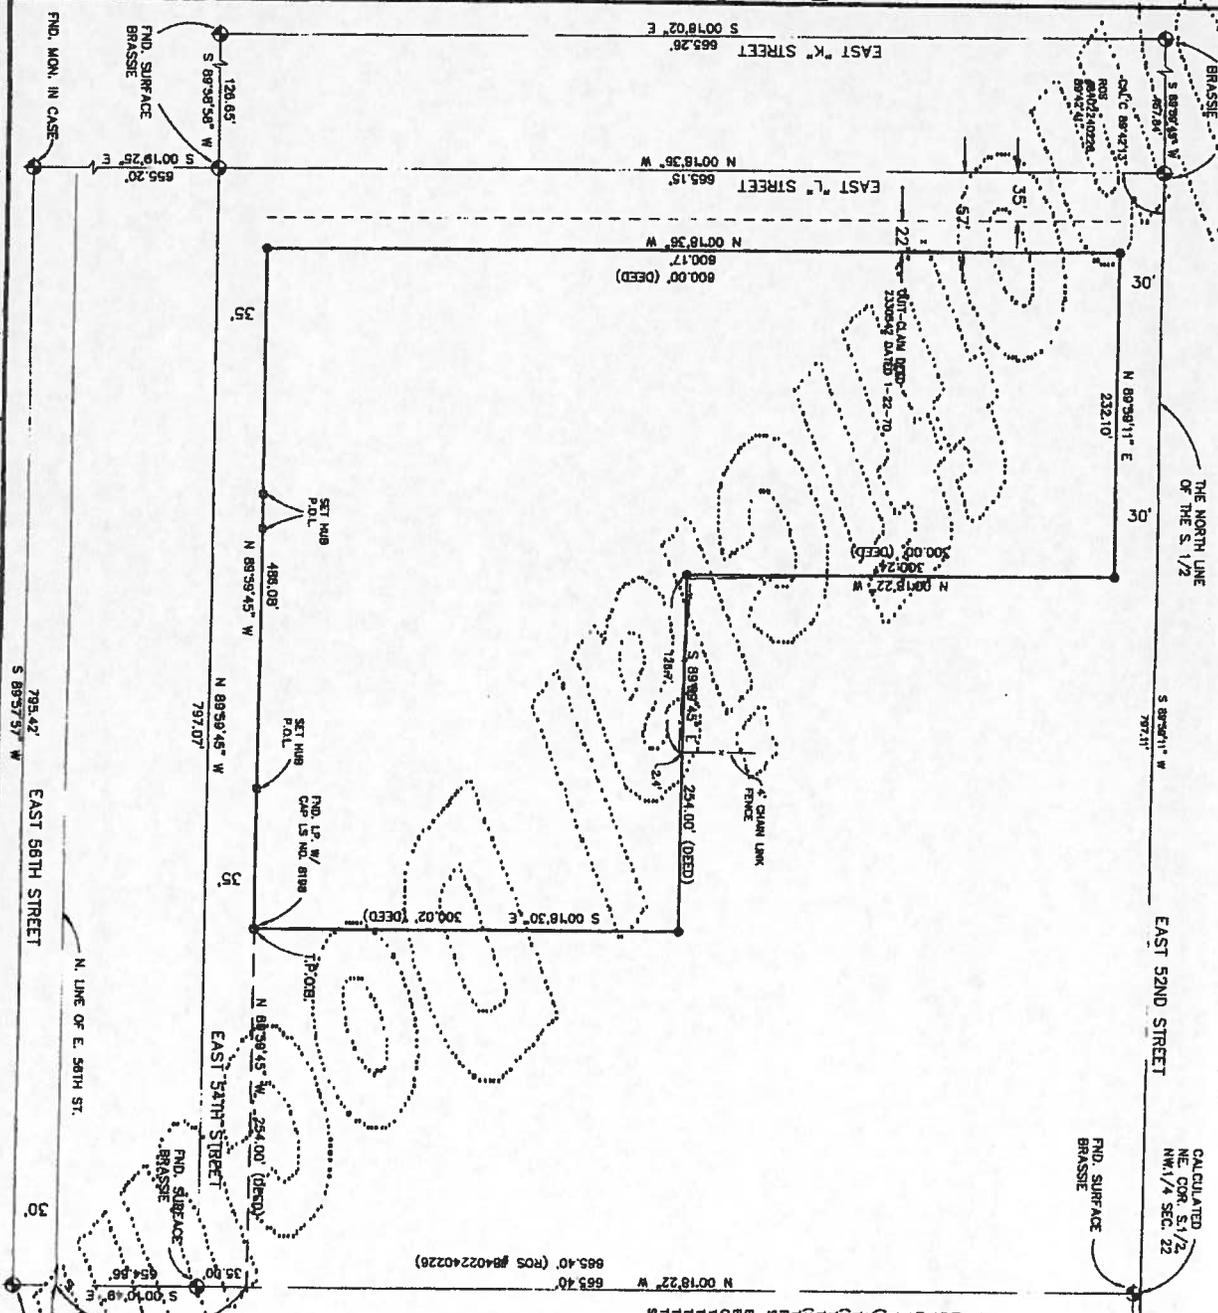

AUDITOR'S CERTIFICATE \$54.00

FILED FOR RECORD THIS 5th DAY OF Dec. 1988  
AT THE REQUEST OF M. M. IN BOOK OF SURVEY'S AT PAGE 11888

912050412  
Cathy Randall  
PIERCE COUNTY AUDITOR

SURVEYOR'S CERTIFICATE

THIS MAP CORRECTLY REPRESENTS A SURVEY MADE BY ME OR UNDER MY DIRECTION IN CONFORMANCE WITH THE REQUIREMENTS OF THE SURVEY RECORDING ACT AT THE REQUEST OF CAROL MAGELSEN, IN NOVEMBER, 1998.

12-3-98  
Charles T. Jeffords  
CERTIFICATE NO. 191982



RECORD OF SURVEY

FOR: CAROL MAGELSEN  
1239 EAST 54TH ST.  
TACOMA, WASHINGTON  
98404



DAVID EVANS AND ASSOCIATES, INC.  
3700 PACIFIC HWY. E., SUITE 307  
TACOMA, WA 98424 (253) 822-5780

DRAWN BY DAI  
JOB NO. 019C 0234  
DATE: 12-03-98  
SCALE: 1" = 60'

912050412

Original

on oath, to me known to be the individual described in and who executed the within instrument, and acknowledged that he signed and sealed the same as his free and voluntary act and deed, for the uses and purposes therein mentioned.

IN WITNESS WHEREOF, I have hereunto set my hand and affixed my official seal the day and year in this certificate first above written.

S. F. McAnally Notary Public  
State Of Washington,  
Commission Expires April 20, 1925

S. F. McAnally  
Notary Public in and for the State of  
Washington, residing at Tacoma, in said County

Filed and recorded at request of Stanley Truscelo Sep. 22, 1921 at 1:05 P.M.

C.A.Campbell Auditor Pierce Co. Wn.

By *[Signature]* Deputy

--E.E.K.--

608854 (Internal Revenue \$1.00 Sep. 22, 1921 S.)

This Indenture, Made this 21st day of September, 1921 between John A. Noble, a bachelor party of the first part, and A. Richardson party of the second part:

Witnesseth: That said party of the first part, for and in consideration of the sum of Ten Dollars, lawful money of the United States of America, to him in hand paid by said party of the second part, the receipt whereof is hereby acknowledged, does by these presents, grant, bargain, sell, convey and confirm unto said party of the second part, his heirs and assigns, the following described real estate, situate, lying and being in the County of Pierce State of Washington, to wit:

All of that portion of lot four (4) of section seven (7) township twenty one (21) north Range two (2) east of the Willamette Meridian in the Abandoned Military Reserve lying north of the north line of that certain five acre tract deeded by said first party to George W. Fairman and Calis A. Fairman his wife by deed dated July 7th, 1919 and recorded the same day in the office of the Auditor of said County under said Auditor's fee number #529180 subject to a certain land contract dated August 11th 1919 between the said party of the first part and W.W.White which is still in full force and effect.

The said party of the second part agreeing to be bound by the provisions of the said contract in the place and stead of the said party of the first part, and have all of the right title and interest in the said contract now in the said party of the first part, and subject to all taxes and assessments and liens and encumbrances allowed thereon since the date of the said contract

together with all and singular, the tenements, hereditaments and appurtenances thereto belonging, TO HAVE AND TO HOLD THE SAME, to said party of the second part, his heirs and assigns, forever And said party of the first part for himself and his heirs, executors and administrators, does by these presents covenant, promise and agree to and with said party of the second part his heirs and assigns, that he will WARRANT and DEFEND the title to the same forever against all lawful claims and demands whatsoever.

In Witness Whereof, said party of the first part has hereunto set his hand and seal the day and year first above written.

Witnesses:  
H. J. Gillies

John A. Noble

(Seal)  
(Seal)  
(Seal)  
(Seal)

State of Washington, )  
County of Pierce, ) ss.

I, the undersigned a Notary Public in and for the State of Washington, do hereby certify that on this 21st day of September A.D. 1921 personally appeared before me John A. Noble a bachelor to me known to be the individual described in and who executed the within instrument and acknowledged that he signed and sealed the same as his free and voluntary act and deed for the uses and purposes therein mentioned.

Given under my hand and official seal this 21st day of September A.D. 1921

W. G. Heinly Notary Public  
State Of Washington,  
Commission Expires Aug. 17, 1923

W. G. Heinly  
Notary Public in and for said State, residing at  
Tacoma in said County

Filed and recorded at request of A. Richardson Sep. 22, 1921 at 1:06 P.M.

C.A.Campbell Auditor Pierce Co. Wn.

By *[Signature]* Deputy

--E.E.K.--

608355 (Internal Revenue \$3.00 June 13, 1921 T.T.Co.)

This Indenture, Made this 3rd day of June A.D. 1921, between TRADERS TRUST COMPANY OF TACOMA a corporation, organized and existing under the laws of the State of Washington, having its principal place of business at Tacoma, in said State, party of the first part and John N. Hendrickson party of the second part,

Witnesseth: That the said party of the first part for and in consideration of the sum of Ten And No/100 Dollars lawful money of the United States of America, to it in hand paid by the said party of the second part, does, by these presents, grant, bargain, sell, convey and confirm, unto the said party of the second part, his heirs, executors, administrators and assigns, the following real estate, lying and being in the County of Pierce State of Washington, described as follows, to-wit:

Beginning at a point where the East line of the South half of the Northwest quarter of Section twenty-two (22), in Township twenty (20) North, Range three (3) East W.M. intersects the North line of East 56th Street, running thence North 560 feet, thence West 254 feet to the true point of beginning, thence North 300 feet parallel with East line of said Section Twenty-two (22) thence West 127 feet parallel with the North line of East 56th Street, thence North 300 feet parallel with the East line of said section twenty-two (22), thence West 381 feet parallel with the East line of East 56th Street, thence South 600 feet parallel with the East line of said Section twenty-two (22), thence East 508 feet to the true point of beginning, being tracts 1, 2, 3, 7, 8, 9 and 10, as shown on the unrecorded plat of Sheridan Garden tracts

With all and singular the hereditaments and appurtenances to the same belonging or appertaining, the reversion and reversions, remainder and remainders, rents, issues and profits thereof. To Have and to Hold, The above granted premises unto the said party of the second part, his heirs, executors, administrators and assigns forever, with all the privileges and appurtenances thereto belonging.

Party of the second part herein assumes and agrees to pay all taxes and assessments since June 13, 1919

In Witness whereof, The said party of the first part, pursuant to and by authority of a resolution of its Board of Trustees, duly passed and entered on its records, has caused its corporate name to be subscribed hereto and its corporate seal, duly attested, to be hereunto affixed the day and year first above written.

**LANDMARKS PRESERVATION COMMISSION**

Succession  
(sorted by term dates)

	INCUMBENT NAME	Current Term Expiration	# of Terms	Term Length	Cumulative Years Served	Appointment Resolution #	Previous Incumbent	Designation
1	Mark McIntire	12/31/12	5	3	12	34742	Mark McIntire Unknown	(AR3)
2	Bret Maddox	12/31/12	1	3		34742	Caroline T Swope Mike Fast Jim Shea	(AL3)
3	Ken House	12/31/12	2	3	3	34742	Ken House Catherine Sleavin	(P4)
4	Katie Chase	12/12/12	0	3	0	38507	Imad Al Janabi Timothy McDonald	(P3)
5	Edward Echte	12/31/12	1	3		34742	Fred King Elizabeth Chambers Roger Edwards	(AL2)
6	Harold York	12/31/13	1	3	0	38191	Ross Buffington Carolyn Eelsey	(P1)
7	Megan Luce	12/31/13	2	3	4	38191	Jonathan Phillips	(P2)
8	Jonah Jensen	12/31/13	1	3	0	38236	Fred King Phillip Hill Unknown	(AR2)
9	VACANT	12/31/14		3	0		Pamela Sundell Greg Benton	(AR1)
10	Daniel Rahe	12/31/14	0	3	0	38386	Ha Pham Roger Johnson Florence Wellborn	(AL1)
11	Marshall McClintock	12/31/15	2	4	3	38386	Kathryn Longwell Roger Johnson	North Slope Ex-Officio
12	Ross Buffington	12/31/15	0	4	0	38507	none	Wedge Ex-Officio
13	vacant							TAC Liaison