
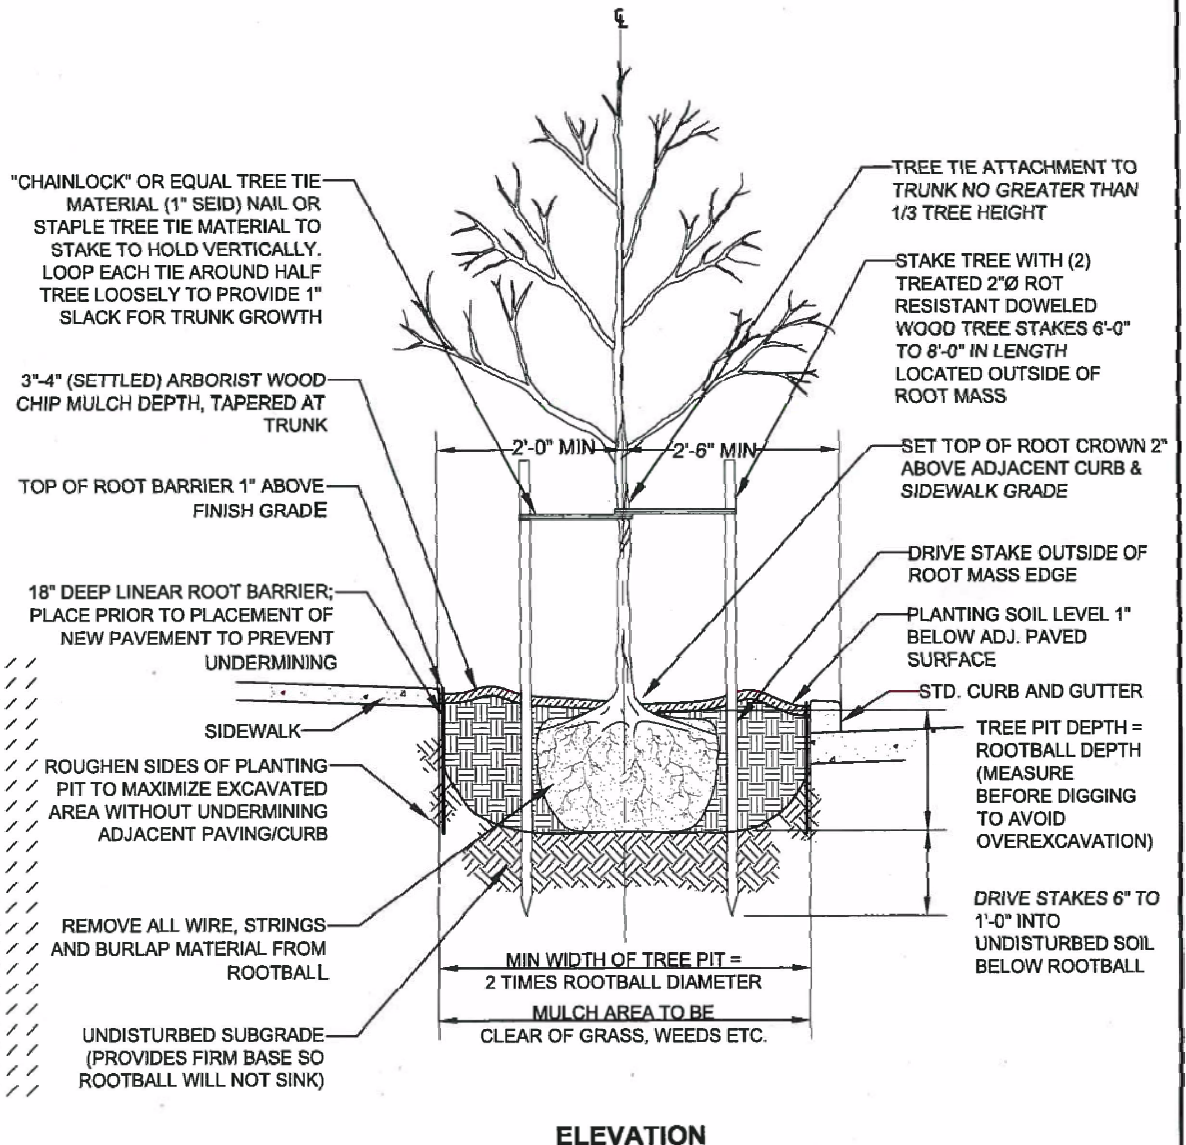


NOTES:

1. Planting includes removal of stakes one year after installation.
2. Shape soil surface to provide 4' dia watering ring.
3. Tree clearance shall be per STD PLAN LS-02.
4. See STD PLAN LS-03 for tree well dimension detail.
5. Root barriers shall be an injection molded or extruded modular component made of high density polypropylene or polyethylene plastic. 18" depth x 10' length root barrier is required along edge of roadways, curbs, driveways, trails, sidewalks, or other structures where root ball is within 4 feet. install root barrier for newly planted trees only.

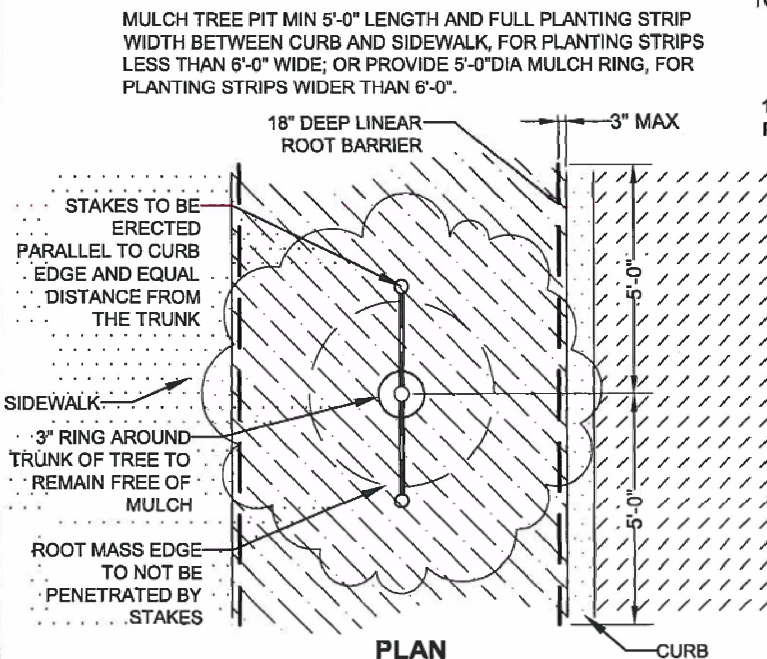

CITY OF TACOMA
DEPARTMENT OF PUBLIC WORKS

APPROVED FOR PUBLICATION

[Signature]
CITY ENGINEER

[Signature]
DATE 2/4/15

STREET TREE PLANTING

STANDARD PLAN NO. LS-01