


**NOTES:**

1. Plantings per Std. Plan GSI-20a and plans.
2. Location, distance between curb cuts, and number of curb cuts vary with facility length and road slope. See plan for location.
3. Inlet and overflow elevation per plans.
4. Freeboard depth varies (2-inches to 6-inches) depending upon size of drainage area. See SWMM BMP L630. Freeboard depth per plans.
5. Weirs or terracing may also be used, see plans.
6. See Std. Plan GSI-04 for transition zone beyond top of facility.
7. See Std. Plans GSI-03a, b and c for section view.

**PLAN  
NTS**

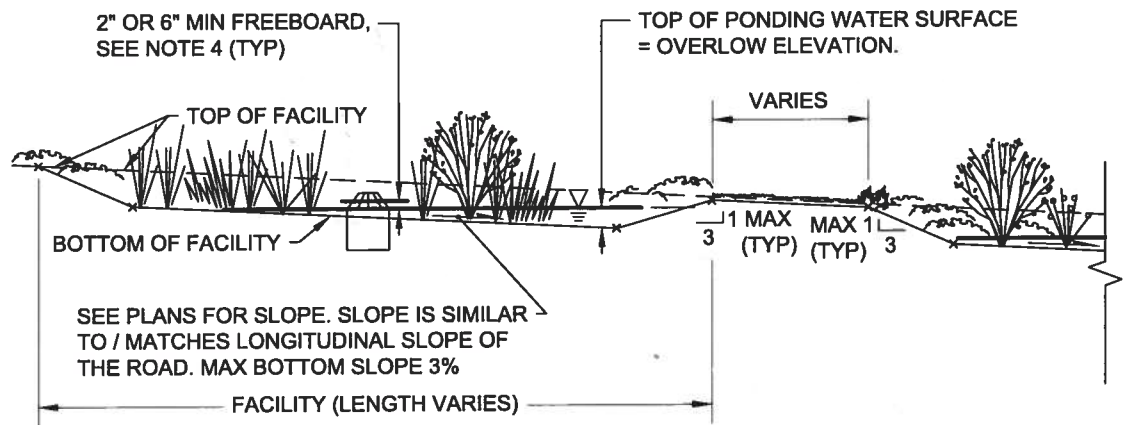

**SECTION A-A  
NTS**

<i>DCS</i>	REVIEWED BY	<i>GMS</i>
PUBLIC WORKS	ENVIRONMENTAL SERVICES	
<i>NA</i>		<i>NA</i>
TACOMA POWER	TACOMA WATER	



APPROVED FOR PUBLICATION

*[Signature]*

CITY ENGINEER

*4/2/12*

DATE

CITY OF TACOMA

BIORETENTION WITH SLOPED SIDES AND SLOPED BOTTOM

PLAN AND LONGITUDINAL SECTION

STANDARD PLAN NO. GSI-05a