



CURB OPENING TYPE 1
PLAN VIEW
NTS

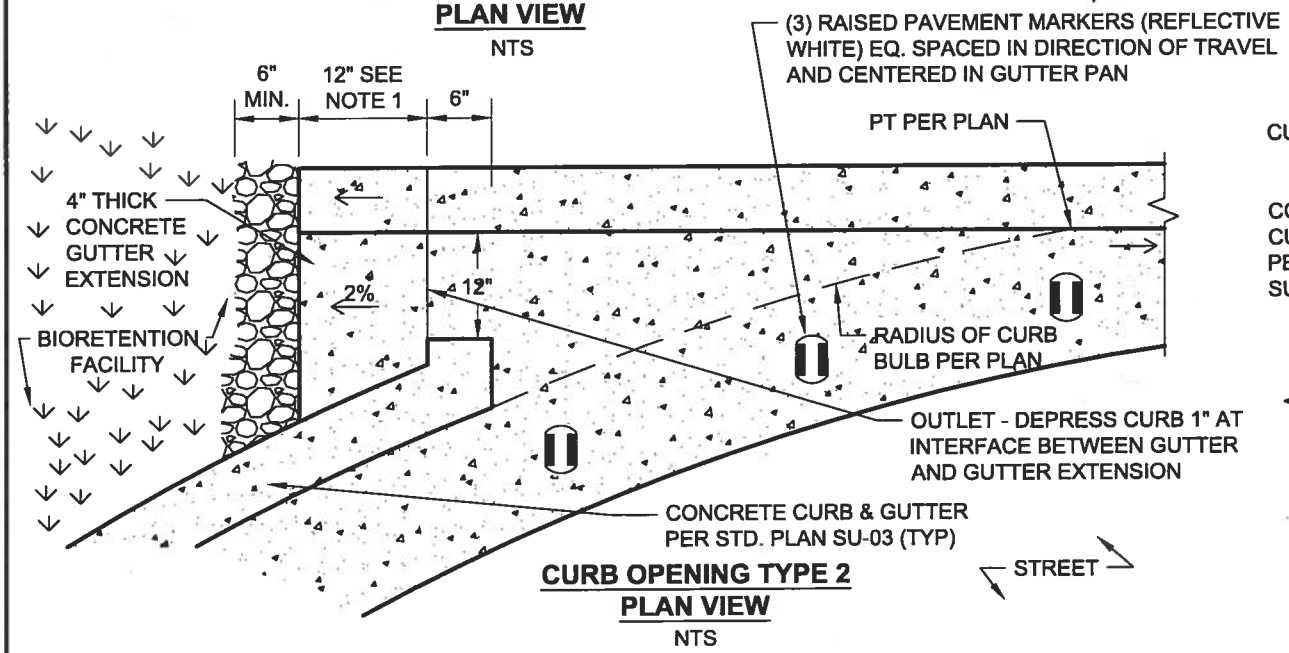

CURB OPENING TYPE 2
PLAN VIEW
NTS

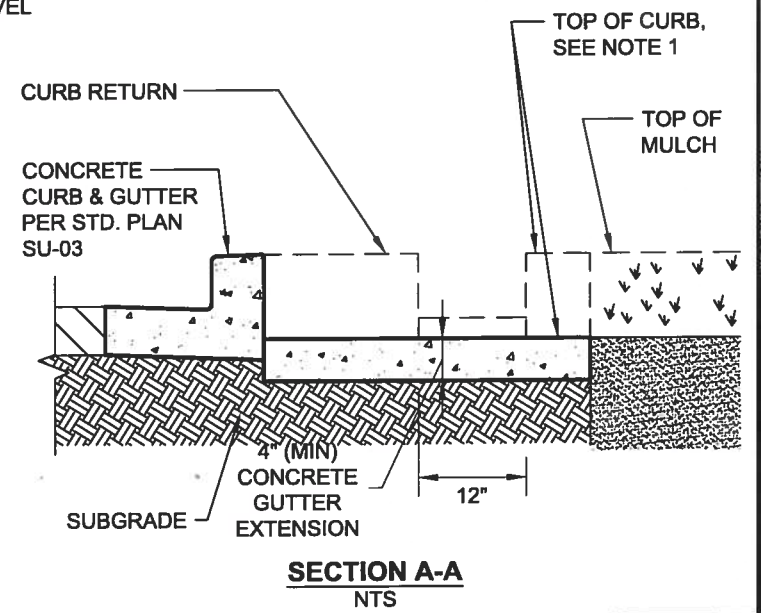


SECTION A-A
NTS

NOTES:

1. Taper curb height from top of curb to top of concrete gutter extension.
2. See City of Tacoma Right-of-Way Restoration Policy for limits of restoration on existing roadways.
3. Cobbles shall be 6" cobbles per WSDOT 9-03.11(2).
4. See Std. Plan GSI-07 for curb bulb with bioretention.
5. Type 1 for traffic flow from bulbout toward standard road section. Type 2 for traffic flow from standard road section toward bulbout.
6. Pavement marking may be required per City of Tacoma Traffic Engineering Section.

DCS PUBLIC WORKS	REVIEWED BY <i>GMS</i> ENVIRONMENTAL SERVICES
NA TACOMA POWER	NA TACOMA WATER



APPROVED FOR PUBLICATION

[Signature]
CITY ENGINEER

[Signature]
DATE

CITY OF TACOMA

BULBOUT (IN-LINE) CURB CUT

STANDARD PLAN NO. GSI-08