
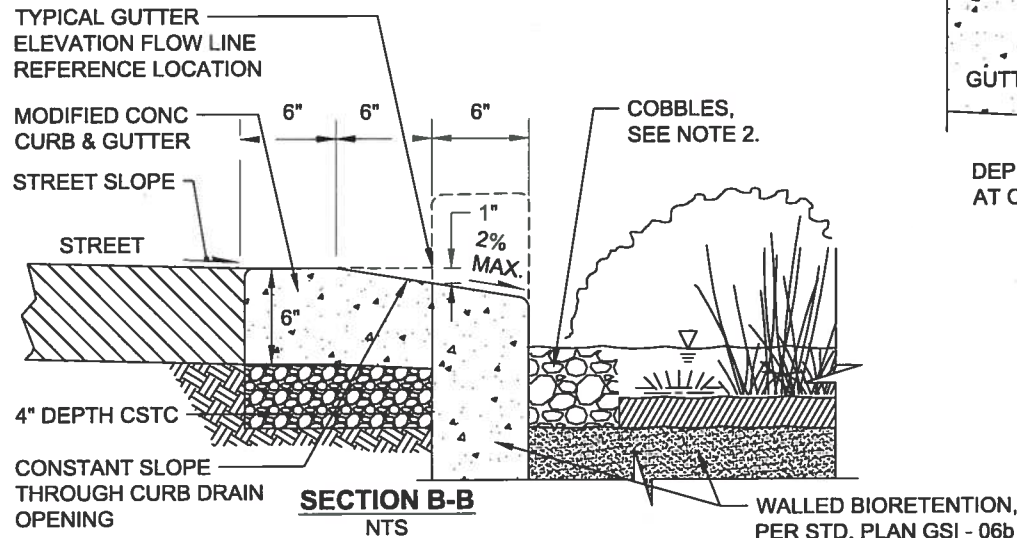


NOTES:

1. See SWMM BMP L630 for curb cut sizing. 12" min. to 18" max. opening.
2. Cobbles shall be 6" cobbles per WSDOT 9-03.11(2). Cobble pad to be 8" thick by the width of the curb opening plus 6 inches on either side (width 24" min. to 30" max) x 12" min.

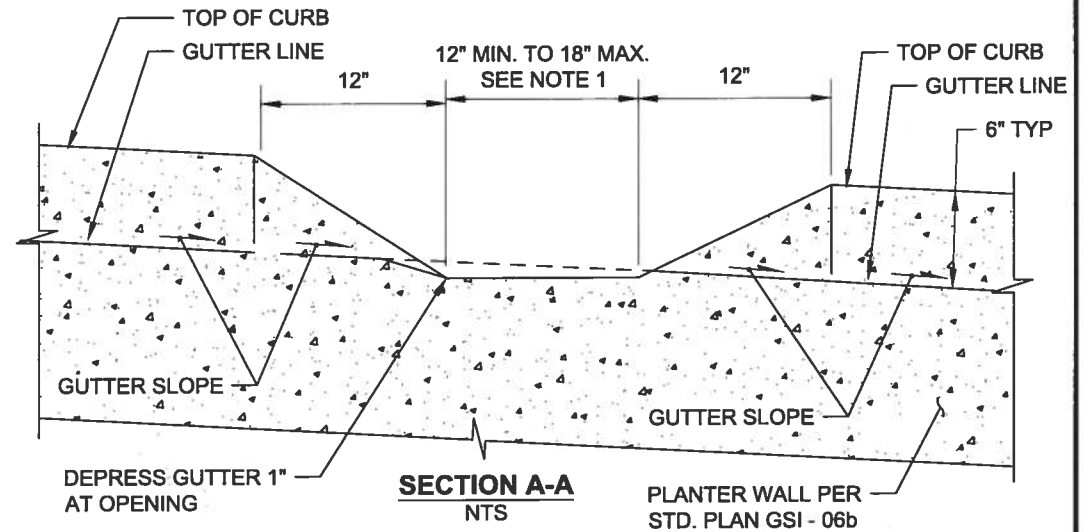

DCS
PUBLIC WORKS
N/A
TACOMA POWER

REVIEWED BY *GMS*
ENVIRONMENTAL SERVICES
NA
TACOMA WATER



APPROVED FOR PUBLICATION

[Signature]
CITY ENGINEER
4/4/12
DATE

CITY OF TACOMA
CURB CUT AT
WALLED FACILITY

STANDARD PLAN NO. GSI-09b