
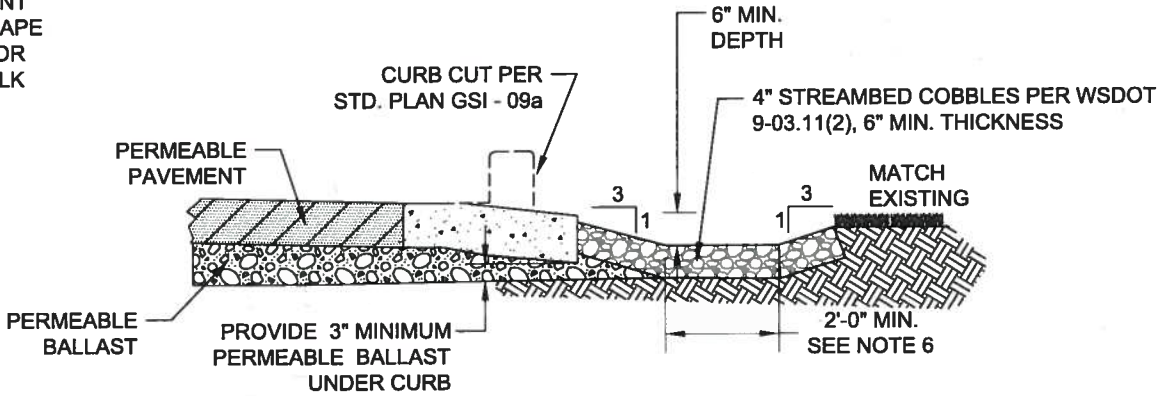


NOTES:

1. Overflow infiltration gallery may be used adjacent to low points in permeable pavements.
2. Dimensions shown are minimums. Design conditions may warrant larger dimensions.
3. Location and spacing of overflow infiltration gallery per plans.
4. See Std. Plan GSI - 09a for curb cut.
5. See SWMM BMP L633 and Std. Plans SU-31a, b, c for permeable pavements.
6. For use in planter strips, minimum bottom width may be adjusted to 1.5 feet if needed.

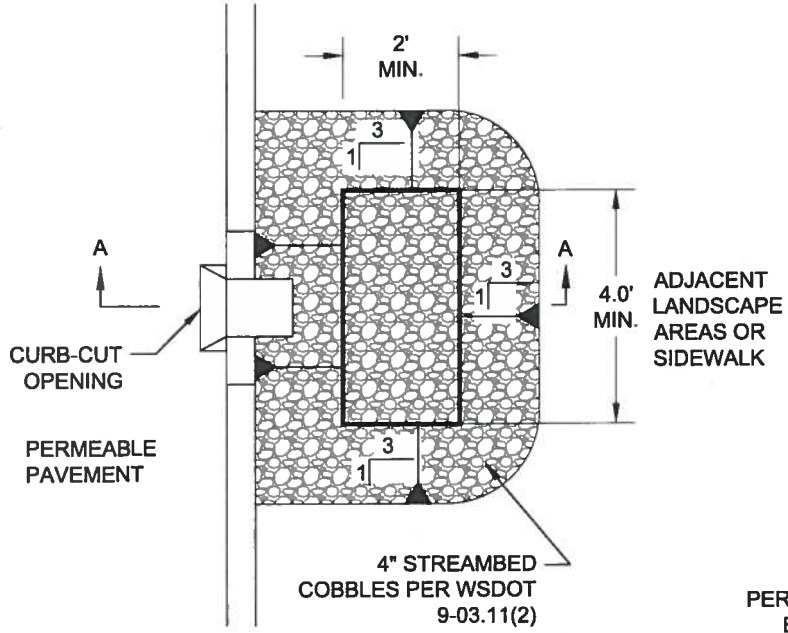

<p>DCS PUBLIC WORKS</p> <p>NA TACOMA POWER</p>	<p>REVIEWED BY <i>(MS)</i></p> <p>ENVIRONMENTAL SERVICES</p> <p>NA TACOMA WATER</p>		<p>APPROVED FOR PUBLICATION</p> <p><i>(Signature)</i> CITY ENGINEER</p> <p><i>4/4/16</i> DATE</p>	<p>CITY OF TACOMA PERMEABLE PAVEMENT OVERFLOW INFILTRATION GALLERY</p> <p>STANDARD PLAN NO. GSI-17</p>
--	---	--	---	--