


NOTE:

THIS STANDARD DEPICTS A VEHICLE HEAD PLACEMENT AS IT RELATES TO THE LANE LINES ON THE APPROACH TO THE GIVEN HEADS.

SIGNAL HEADS MUST BE LEVELED TO SPEC FROM A POINT 80 FEET FROM THE STOP BAR.

OVERHEAD SIGNS SHALL BE PLACED 2 FEET FROM VEHICLE HEAD.

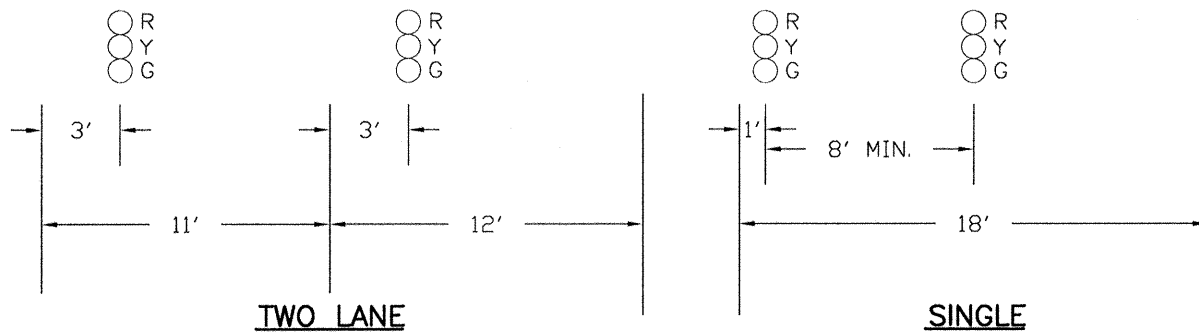

CITY OF TACOMA
DEPARTMENT OF PUBLIC WORKS

APPROVED FOR PUBLICATION

CITY ENGINEER

[Signature] 2/12/03

DATE 2/4/03

STANDARDS FOR
SIGNAL
PLACEMENT

STANDARD PLAN NO. TS-14